





The internal door is for use in heated work- and living quarters. The door is not suitable for outdoor use and between rooms with different air temperatures.

The door is compatible with frame profile SU290 or SU320D.

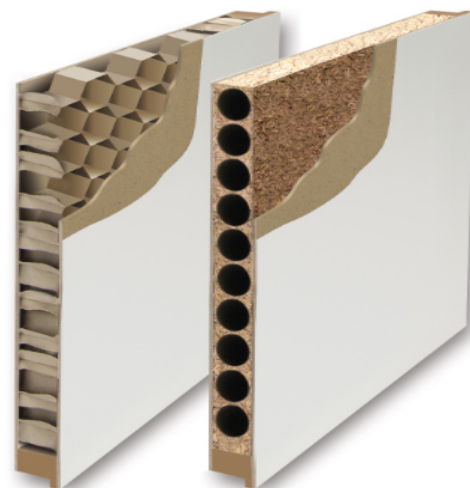

TECHNICAL DATA

Size	one sided	M7-10 x M20-21
	extended	M13,4 x M20-21
	double sided	M13,4;15,4;17,4;19,4 x M20-21
Door leaf	rebated, thickness 40mm	
Locking system	lock case 2014	
Hinges	FT-65	
Finishing	white(S 0502-Y)	
Glass	4mm clear, diamante, cotzwold or satinovo	
Glazing bar	plastic profile	
Extras	ventilation grille, special paint, veneer, laminate, frame, threshold, increasing moisture resistance	

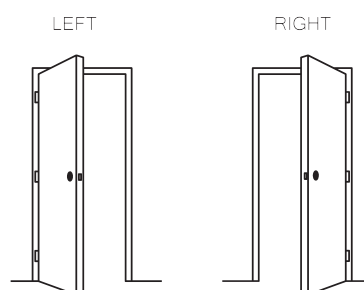

It is possible to get special solutions. More information from the representative.

	H	B	W	A	A1	A2
M7			690	643	606	589
M8			790	743	706	689
M9			890	843	806	789
M10			990	943	906	889
M13,4 (7+7)			1330	643+643	1246	1208
M13,4(10+4)			1330	943+343	1246	1208
M20	1990	1948				
M21	2090	2048				

