

Wetness internal door is for use in heated work- and living quarters.

All exterior surfaces of the door are treated with finishes that improve the door's durability in conditions of high humidity or when moisture temporarily forms on the surface of the door leaf.

The door is not suitable for outdoor use and between rooms with different air temperatures or as an intermediate door in public washrooms or swimming pools.


The moisture resistance applies only to the door leaf.

The door is compatible with frame profile RU420 or RU450D.



TECHNICAL DATA

Size	one sided	M7-10 x M20-21
Door leaf	rebated,	thickness 40mm
Locking system	lock case	2014
Hinges	FT-65	
Finishing	white(S	0502-Y)

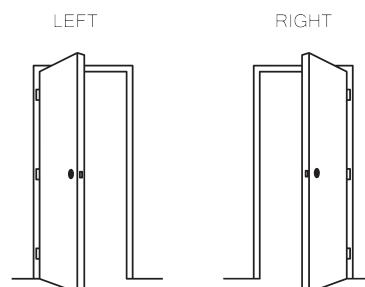

It is possible to get special solutions. More information from the representative.

