




The internal door is for use in heated work- and living quarters. The door is not suitable for outdoor use and between rooms with different air temperatures.

The door is compatible with frame profile RU420 or RU450D.

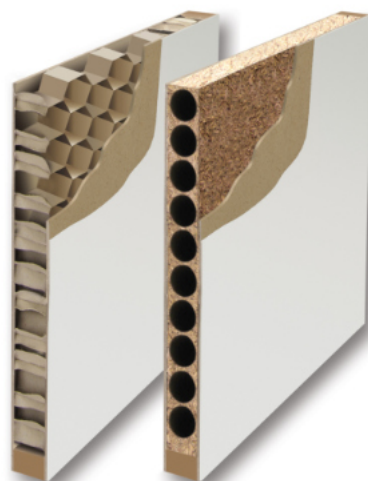

TECHNICAL DATA

Size	one sided	M7-10 x M20-21
	extended	M13;13,3;14 x M20-21
	double sided	M13,3;15,3;17,3;19,3 x M20-21
Door leaf	non-rebated, thickness 40mm	
Locking system	lock case 2014	
Hinges	6540	
Finishing	white(S 0502-Y)	
Glass	4mm clear, diamante, cotzwold or satinovo	
Glazing bar	plastic profile	
Extras	ventilation grille, special paint, veneer, laminate, frame, threshold, sliding door, increasing moisture resistance	

It is possible to get special solutions. More information from the representative.

	H	B	W	A	A1	A2
M7			690	625	606	568
M8			790	725	706	668
M9			890	825	806	768
M10			990	925	906	868
M13,3 (7+7)			1317	625+625	1233	1157
M13,3(10+4)			1317	925+325	1233	1157
M20	1990	1940				
M21	2090	2040				

