

SWING DOOR



Swing door is for use in heated work- and living quarters. The door is not suitable for outdoor use and between rooms with different air temperatures.

TECHNICAL DATA

Size			one	sided	M7-1	0 x	N	120-21
		/ /	can	be pi	oduced	l as	а	double-sided

Locking	system	thickness	40mm
LOCKING	SYSICHT	/ III/CKI/CSS	топип


Frame	pine, depth 92mm		
Lock	none		
Hinges	swing hinges		
Finishing	white (S 0502-Y), special colour	LEFT	RIGHT
Glass	4mm clear, diamante, cotzwold or satinovo		
Glazing bar	plastic profile		a 🛛]
Extras	stainless steel kick plate, veneer coating, laminate coating		


It is possible to get special solutions. More information from the representative.










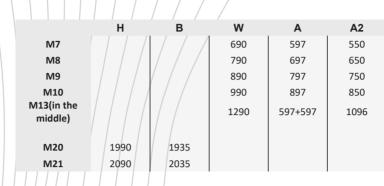














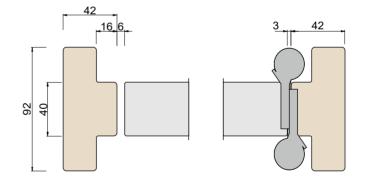



vau.ee