


SD09 is a wooden sound insulation door for use in heated work and living areas to close openings between sound insulating sections.


The temperature difference between the rooms to be separated must not exceed 5 ° C.

Sound insulation R_w 36–39dB

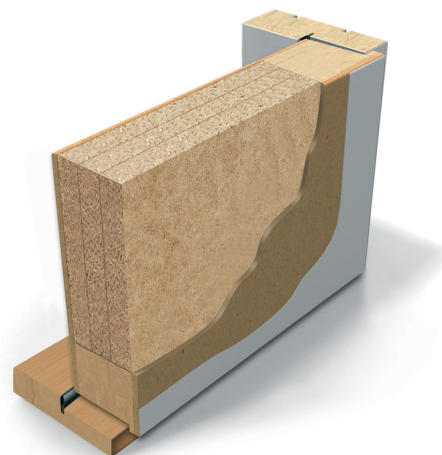


TECHNICAL DATA

Size	M7–10 x M20–21
Door leaf	rebated, thickness 52mm
Frame	pine, depth 92mm
Threshold	oak, height 25mm
Locking system	lock case ASSA 565 and striking plate LP732
Hinges	plate hinges NTR 110–30
Finishing	white (S 0502–Y) or special colour
Glass	laminated clear
Extras	stainless steel kick plate, surface mounted door closer, grooved patterns, veneer cover, glued decorative panels and / or moldings, laminate cover, mailbox, door eye, doorbell, additional lock case

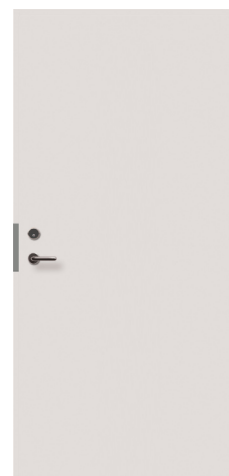

LEFT

RIGHT

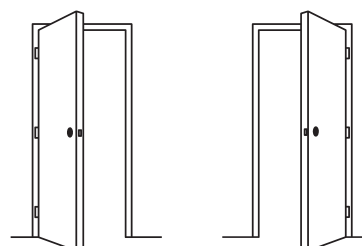

It is possible to get special solutions. More information from the representative.

	H	B	W	A	A1	A2
M7			690	645	606	577
M8			790	745	706	677
M9			890	845	806	777
M10			990	945	906	877
M20	1990	1954				
M21	2090	2054				

