

FD30 is a wooden fire resistant door for use in heated work and living areas to close openings between fire compartments.


The temperature difference between the rooms to be separated must not exceed 5 ° C.

Fire resistant	EI ₂ 30
Self-closing class	C0



TECHNICAL DATA

Size	M7-10 x M20-21
	can produce as adouble-sided
Door leaf	non-rebated, thickness 40mm
Frame	pine, depth 92mm
Threshold	oak, height 22mm
Locking system	lock case ASSA 565 and striking plate 2864-2
Hinges	plate hinges Abloy 3248
Finishing	white (S 0502-Y) or special color
Extras	door eye, doorbell, stainless steel kick plate, surface mounted door closer, veneer cover, glued decorative panels and or moldings, descending threshold

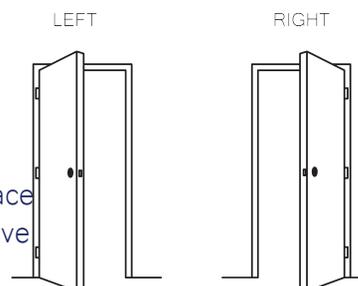

It is possible to get special solutions. More information from the representative.

	H	B	W	A	A1	A2
M7			690	625	606	564
M8			790	725	706	664
M9			890	825	806	764
M10			990	925	906	864
M20	1990	1940				
M21	2090	2040				

