

FD30-28 is a wooden fire-and sound door for use in heated work and living areas to close openings between fire compartments.

The temperature difference between the rooms to be separated must not exceed 5 ° C.




Fire resistant	EI ₂ 30
Sound insulation	R _w 28dB
Self-closing class	C0



TECHNICAL DATA

Size	M7-10 x M20-21
Door leaf	non-rebated, thickness 40mm
Frame	pine, depth 92mm
Threshold	oak, height 22mm
Locking system	lock case ASSA 565 and striking plate 2864-2
Hinges	plate hinges Abloy 3248
Finishing	white (S 0502-Y) or special colour
Extras	door eye, doorbell, stainless steel kick plate, door closer, grooved patterns, veneer covering, glued decorative panels and / or moldings

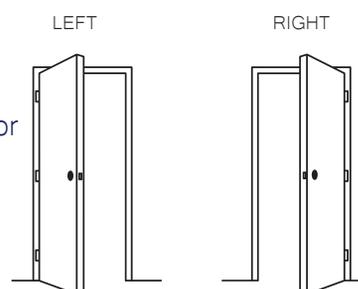

It is possible to get special solutions. More information from the representative.



	H	B	W	A	A1	A2
M7			690	625	606	564
M8			790	725	706	664
M9			890	825	806	764
M10			990	925	906	864
M20	1990	1940				
M21	2090	2040				

