


FD18-Clima is a door for use in heated work and living areas to close openings between fire compartments.


The temperature difference between the rooms to be separated must not exceed 20°C.

|                   |                     |
|-------------------|---------------------|
| Fire resistant    | EI <sub>130</sub>   |
| Smoke control     | Sa/S <sub>200</sub> |
| Sound insulation  | Rw 38-40dB          |
| Self-closing cass | C0-C5               |

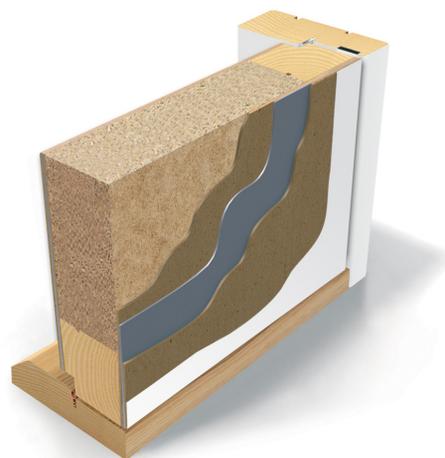

## TECHNICAL DATA

|                |  |
|----------------|--|
| Size           | one sided M7-10 x M20-21<br>can be produced as a double-sided  |
| Door leaf      | non-rebated, thickness 54mm  |
| Frame          | pine, depth 92mm   |
| Threshold      | oak, height 25mm   |
| Locking system | lock case ASSA 565 and striking plate LP712  |
| Hinges         | plate hinges Abloy 3248  |
| Finishing      | white (S 0502-Y) or special colour   |
| Glass          | clear fire glass   |
| Extras         | additional lock case, doorbell, door eye, surface mounted door closer, stainless steel kick plate, veneer cover, grooved patterns, glued decorative panels and/or moldings, descending thershold, postbox, glass inserts |

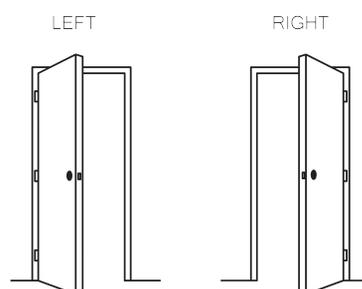

It is possible to get special solutions. More information from the representative.

|     | H    | B    | W   | A   | A1  | A2  |
|-----|------|------|-----|-----|-----|-----|
| M7  |      |      | 690 | 625 | 606 | 550 |
| M8  |      |      | 790 | 725 | 706 | 650 |
| M9  |      |      | 890 | 825 | 806 | 750 |
| M10 |      |      | 990 | 925 | 906 | 850 |
| M20 | 1990 | 1940 |     |     |     |     |
| M21 | 2090 | 2040 |     |     |     |     |

