

The FD09 door is for use in heated work and living quarters to close openings between fire compartments.



The temperature difference between the rooms to be separated must not exceed 5 ° C.

Fire resistant	EI ₁₃₀
Smoke control	Sa/S ₂₀₀
Sound insulation	R _w 37-39dB
Self-closing class	C0-C5



TECHNICAL DATA

Size	M7-10 x M20-21 can be produced as a double-sided
Door leaf	rebated, thickness 52mm
Frame	pine, depth 92mm
Threshold	oak, height 25mm
Locking system	lock case ASSA 565 and striking plate LP732
Hinges	plate hinges NTR 110-30
Finishing	white (S 0502-Y) or special color
Glass	clear fire glass
Extras	stainless steel kick plate, surface mounted door closer, door eye, doorbell, veneer cover, glued decorative shields and/or moldings, grooved patterns, descending threshold, postbox, additional lock case

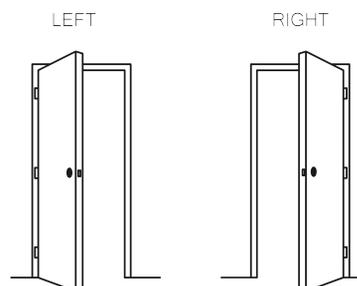

It is possible to get special solutions. More information from the representative.

	H	B	W	A	A1	A2
M7			690	645	606	577
M8			790	745	706	677
M9			890	845	806	777
M10			990	945	906	877
M20	1990	1954				
M21	2090	2054				

