

The E02 door is for use in heated work and living quarters to close openings between fire compartments.

The temperature difference between the rooms to be separated must not exceed 5 ° C.





Fire resistant	EI <sub>130</sub>
Smoke control	Sa/S <sub>200</sub>
Sound insulation	R <sub>w</sub> 44dB
Self-closing class	C0-C5



## TECHNICAL DATA

Size	M7-10 x M20-21
Door leaf	rebated, thickness 63mm
Frame	pine, depth 92mm
Threshold	oak, height 25mm
Locking system	lock case ASSA 565 and striking plate LP732
Hinges	plate hinges Abloy NTR 110-30
Finishing	white (S 0502-Y) or special color
Extras	stainless steel kick plate, surface mounted door closer, door eye, veneer cover, glued decorative panels and/or moldings, descending threshold, additional lock case

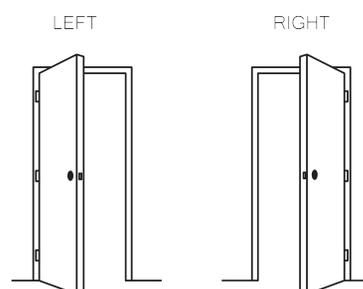

It is possible to get special solutions. More information from the representative.

	H	B	W	A	A1	A2
M7			690	645	606	568
M8			790	745	706	668
M9			890	845	806	768
M10			990	945	906	868
M20	1990	1954				
M21	2090	2054				

