

FD60 door is for use in heated work and living quarters to close openings between fire compartments.

The temperature difference between the rooms to be separated must not exceed 5 ° C.




Fire resistant	EI ₁₆₀
Smoke control	Sa/S ₂₀₀
Sound insulation	Rw 31dB
Self-closing class	C0-C5



TECHNICAL DATA

Size	M7-10 x M20-21
Door leaf	non-rebated, thickness 54mm
Frame	pine, 92mm depth
Threshold	oak, 25mm height
Locking system	lock case ASSA 565 and striking plate 1887-2
Hinges	plate hinges Abloy 3248
Finishing	white (S 0502-Y) or special color
Extras	stainless steel kick plate, doorbell, surface mounted door closer, veneer cover, glued decorative panels and/or moldings, additional lock

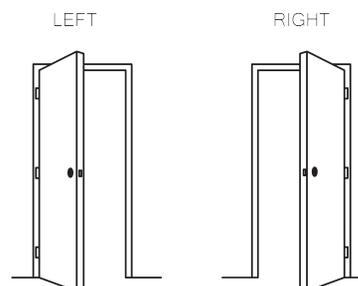

It is possible to get special solutions. More information from the representative.

	H	B	W	A	A1	A2
M7			690	625	606	550
M8			790	725	706	650
M9			890	825	806	750
M10			990	925	906	850
M20	1990	1940				
M21	2090	2040				

