

FD60-38 door is for use in heated work and living quarters to close openings between fire compartments.


The temperature difference between the rooms to be separated must not exceed 5 ° C.

Fire resistant	EI-60
Smoke control	Sa/S ₂₀₀
Sound insulation	Rw 38dB
Self-closing class	C0-C5



TECHNICAL DATA

Size	M7-10 x M20-21
Door leaf	non-rebated, thickness 67mm
Frame	pine, depth 92mm
Threshold	oak, height 25mm
Locking system	lock case ASSA 565 and striking plate 0094
Hinges	plate hinges Abloy 3248
Finishing	white (S 0502-Y) or special color
Extras	door closer, door eye, veneer cover, glued decorative panels and / or moldings, cable

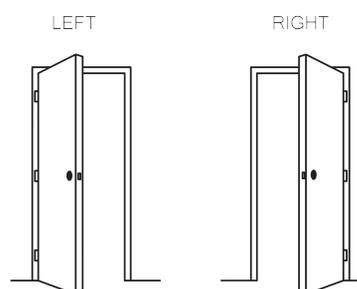

It is possible to get special solutions. More information from the representative.

	H	B	W	A	A1	A2
M7			690	625	606	537
M8			790	725	706	637
M9			890	825	806	737
M10			990	925	906	837
M20	1990	1940				
M21	2090	2040				

