

The FD06 door is for use in heated work and living quarters to close openings between fire compartments.

The temperature difference between the rooms to be separated must not exceed 5 ° C.




Fire resistant	EI <sub>130</sub>
Sound insulation	R <sub>w</sub> 40-42dB





## TECHNICAL DATA

Size	M7-10 x M20-21
Door leaf	rebated, thickness 68mm
Frame	pine, depth 92mm
Threshold	oak, height 25mm
Locking system	lock case ASSA 565 and striking plate LP731
Hinges	plate hinges Abloy 110-30
Glass	white (S 0502-Y) or special color
Extras	stainless steel kick plate, surface mounted door closer, veneer cover, glued decorative shields and/or moldings, doorbell, door eye, additional lock case, letter plate

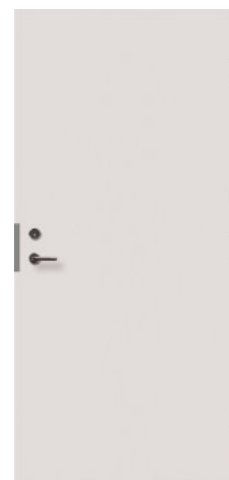

LEFT

RIGHT



It is possible to get special solutions. More information from the representative.



	H	B	W	A	A1	A2
M7			690	645	606	561
M8			790	745	706	661
M9			890	845	806	761
M10			990	945	906	861
M20	1990	1954				
M21	2090	2054				

