

The FD06 Clima door is for use in heated work and living quarters to close openings between fire compartments.

The temperature difference between the rooms to be separated must not exceed 20 ° C.





Fire resistant	EI ₁₃₀
Sound insulation	R _w 40-42dB



TECHNICAL DATA

Size	M7-10 x M20-21
Door leaf	rebated, thickness 68mm
Frame	pine, depth 92mm
Threshold	oak, height 25mm
Locking system	lock case ASSA 565 and striking plate LP731
Hinges	plate hinges Abloy 110-30
Glass	white (S 0502-Y) or special color
Extras	stainless steel kick plate, surface mounted door closer, veneer cover, glued decorative shields and/or moldings, doorbell, door eye, additional lock case, letter plate

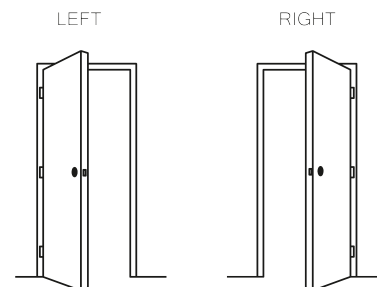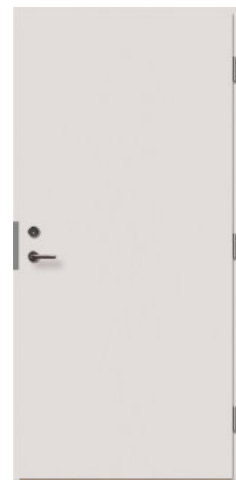

It is possible to get special solutions. More information from the representative.



	H	B	W	A	A1	A2
M7			690	645	606	561
M8			790	745	706	661
M9			890	845	806	761
M10			990	945	906	861
M20	1990	1954				
M21	2090	2054				

