

FD18-Clima RC2 is a certified burglar-proof interior door for use in heated work and living areas to close openings between fire compartments.


The temperature difference between the rooms to be separated must not exceed 20 ° C.

Fire resistant	EI ₁₃₀
Smoke control	Sa/S ₂₀₀
Sound insulation	Rw 38-40dB
Self-closing class	C0-C5
Burglary resistant	Rc2



TECHNICAL DATA

Size	one-sided M7-10 x M20-21
Door leaf	non-rebated, thickness 54mm
Frame	pine, depth 92mm
Threshold	oak, height 25mm
Locking system	lock case with ASSA 410 or ASSA 2002 security plates 4292. Striking plate 1487-2HD (metal security plate on the back of the frame)
Hinges	plate hinges Abloy 3248 (metal security plate on the back of the frame)
Finishing	white (S 0502-Y) or special color
Extras	additional lock, doorbell, door eye, door closer, stainless steel kick plate, veneer cover, grooved pattern, glued decorative panels and/or moldings

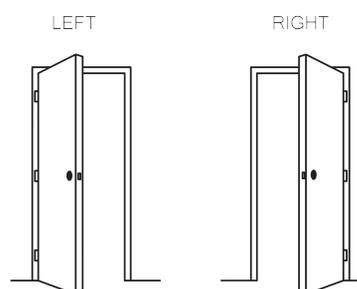

It is possible to get special solutions. More information from the representative.

	H	B	W	A	A1	A2
M7			690	625	606	550
M8			790	725	706	650
M9			890	825	806	750
M10			990	925	906	850
M20	1990	1940				
M21	2090	2040				

