

FD18-Sound RC2 is a certified burglar-proof interior door for use in heated work and living areas to close openings between fire compartments.

The temperature difference between the rooms to be separated must not exceed 5 ° C.




| | |
|--------------------|------------|
| Sound insulation | Rw 38-40dB |
| Burglary resistant | Rc2 |



TECHNICAL DATA

| | |
|--------------|--|
| Size | M7-10 x M20-21 |
| Door leaf | non-rebated, thickness 54mm |
| Frame | pine, depth 92mm |
| Threshold | oak, height 25mm |
| Locking case | lock case with ASSA 410 or ASSA 2002 security plates 4292. Striking plate 1487-2HD (metal security plate on the back of the frame) |
| Hinges | plate hinges Abloy 3248 (metal security plate on the back of the frame) |
| Finishing | white (S 0502-Y) or special color |
| Extras | additional lock, doorbell, door eye, door closer, stainless steel kick plate, veneer cover, grooved pattern, glued decorative panels and / or moldings |

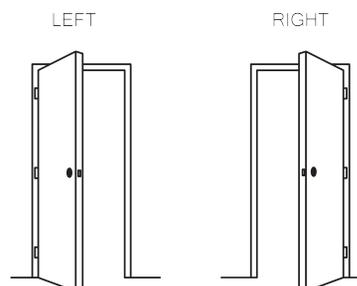

It is possible to get special solutions. More information from the representative.

| | H | B | W | A | A1 | A2 |
|-----|------|------|-----|-----|-----|-----|
| M7 | | | 690 | 625 | 606 | 550 |
| M8 | | | 790 | 725 | 706 | 650 |
| M9 | | | 890 | 825 | 806 | 750 |
| M10 | | | 990 | 925 | 906 | 850 |
| M20 | 1990 | 1940 | | | | |
| M21 | 2090 | 2040 | | | | |

