


FD60 RC3 is a certified burglar-proof interior door for use in heated work and living areas to close openings between fire compartments.

The temperature difference between the rooms to be separated must not exceed 5 ° C




Fire resistant	EI <sub>160</sub>
Smoke control	Sa/S <sub>200</sub>
Sound insulation	R <sub>w</sub> 31dB
Self-closing class	C0-C5
Burglar resistance	RC3

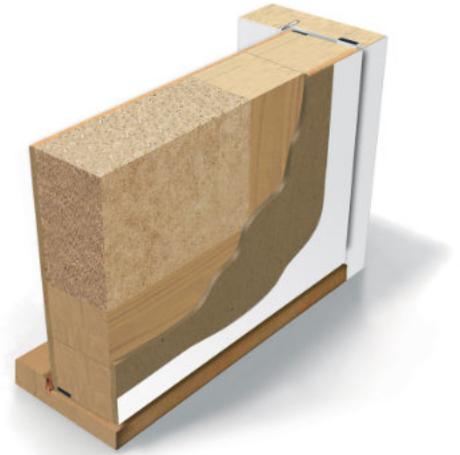

## TECHNICAL DATA

Size	M7-10 x M20-21
Door leaf	non-rebaled, thickness 54mm
Frame	pine, depth 92mm
Threshold	oak, height 25mm
Locking system	lock case ASSA 510 (+safety cover ASSA 4292). Strking plate LP713 or ASSA 1487 (+security plate)
Hinges	plate hinges Abloy 3288 or ASSA 3225 (+security plate)
Finishing	white (S 0502-Y) or special color
Extras	additional lock Assa 411, doorbell, door closer, stainless steel kick plate, veneer cover, cable, glued decorative panels and / or moldings

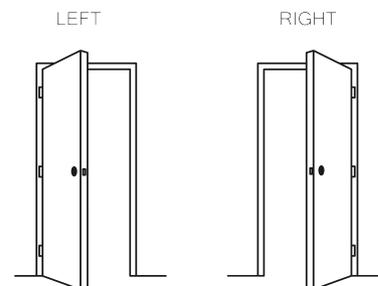

It is possible to get special solutions. More information from the representative.



	H	B	W	A	A1	A2
M7			700	625	606	550
M8			800	725	706	650
M9			900	825	806	750
M10			1000	925	906	850
M20	1990	1940				
M21	2090	2040				

