




Inward opening double framed wooden-aluminium window.

Water tightness	Class 9A
Sound insulation	Rw45-52dB
Air permeability	Class 4
Resistance to wind load	Class C3
Thermal transmittance	1,1-0,98W/m²K



TECHNICAL DATA

Size	320-2300 x 320-2500mm maximum sash size 4m²
Construction	double frame
Opening	opens for washing and ventilation
Frame	pine, depth 130,170,210mm
Glass	glass in outer sash up to 6mm, double glazing in the inner sash up to 34mm
Fittings	locking case for washing, long closure for ventilation
Handle	Fiskostar 501
Hinges	bolthingses
Finishing	wood white (S 0502-Y), special color, unfinished or stained. Aluminum tone RAL9010 or according to color card
Extras	glued glazing bars, ventilation valve, mosquito net, blinds between sashes

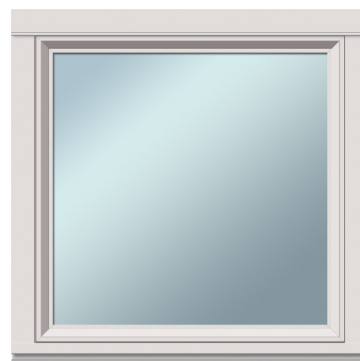

FC05


It is possible to get special solutions. More information from the representative.

vau.ee



MSEAL-B

min/max width x height

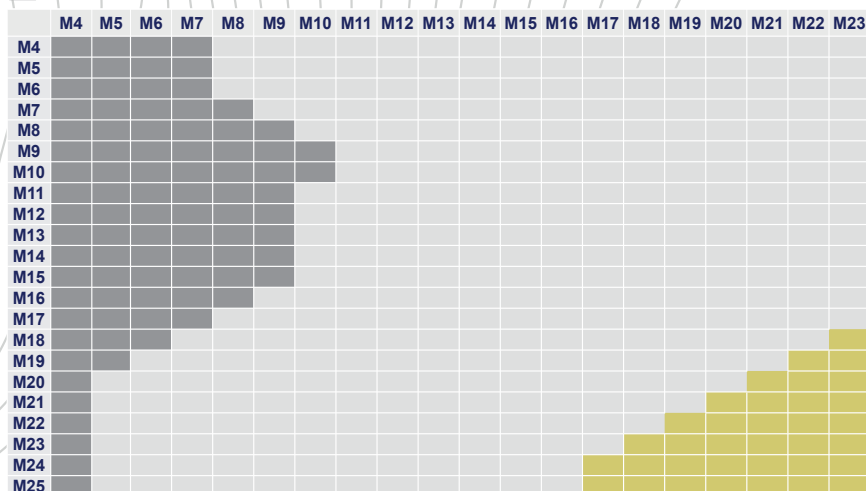

- difficulties with opening
- support while opening
- recommended size range

FC05

