




Inward opening wooden-aluminum lift and slide door with triple-glazed.

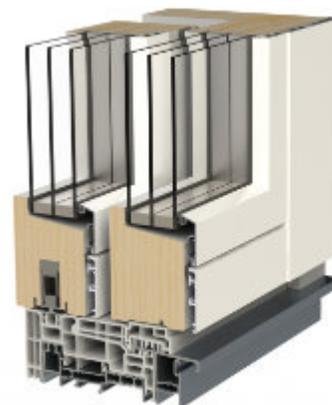

Water tightness	Class 7A
Sound insulation	Rw 31-41 dB (klaasil)
Air permeability	Class 4
Resistance to wind load	Class C3
Thermal transmittance	0,97-0,85 W/m ² K

* The given values refers for 2-opening product size 2580x2080mm



TECHNICAL DATA

Size	2-opening 1580-3980 x 1780-2580 4-opening 2880-5980 x 1780-2580
Construction	sliding door
Opening	parallel
Frame	pine, depth 198mm
Glass	triple-glazed, thickness 52mm
Fittings	G.U
Finishing	wood, white (S 0502-Y), special colour or unfinished. Aluminum shade based on RAL9010 or color card
Extras	glazing bars

It is possible to get special solutions. More information from the representative.

HSAL double opening

	M16	M17	M18	M19	max kuni M40
M18					
M19					
M20					
M21					
M22					
M23					
M24					
M25					
M26					

HSAL four opening

	M29	M30	M40	M50	max kuni M60
M18					
M19					
M20					
M21					
M22					
M23					
M24					
M25					
M26					

min/max width x height

recommended size range

