


HSWD is inward opening wooden lift and slide door with triple-glazed.

Water tightness	Class 5A
Air permeability	Class 4
Sound insulation	Rw32dB (glass)
Resistance to wind load	Class C4
Thermal transmittance	1,1-1,0 W/m <sup>2</sup> K

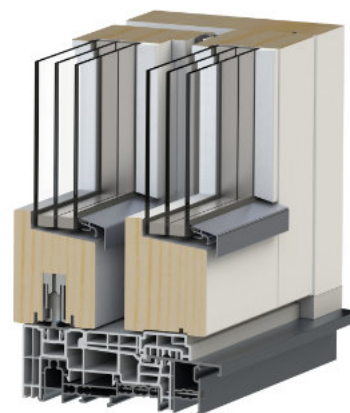

## TECHNICAL DATA

Size	2-opening	1580-3980 x 1780-2580
	4-opening	2880-5980 x 1780-2580
Construction	sliding door	
Opening	parallel	
Frame	pine, depth 184mm	
Glass	triple-glazed, thickness 42mm	
Fittings	G.U	
Finishing	wood, white (S 0502-Y), special colour or unfinished.	
Extras	glazing bars	

It is possible to get special solutions. More information from the representative.

HSWD double opening

	M16	M17	M18	M19	max M40
M18					
M19					
M20					
M21					
M22					
M23					
M24					
M25					
M26					

HSWD four opening

	M29	M30	M40	M50	max M60
M18					
M19					
M20					
M21					
M22					
M23					
M24					
M25					
M26					

min/max width x height

recommended size range

FJ04

