



Hidden in-wall frame system with door leaf.

The door is for use in heated work and living rooms.
The door is not suitable for outdoor use and between rooms with different air temperatures.



inward opening


outward opening

TECHNICAL DATA



Size	customer dimensions
Door leaf	thickness of 40, 45, 55mm(outward opening) or 50-55mm(inward opening)
Frame	X2 aluminium profile
Locking system	magnet lock
Hinges	A24
Finishing	painted, veneered, laminated
Glass opening	according to the flush doors glass opening designs
Glass	clear, cotzwold, raaka, satinovo
Extras	hidden door closer, door closer Geze Active Stop

GA02


It is possible to get special solutions. More information from the representative.

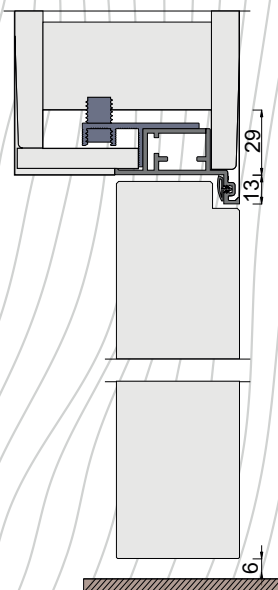

inward
opening

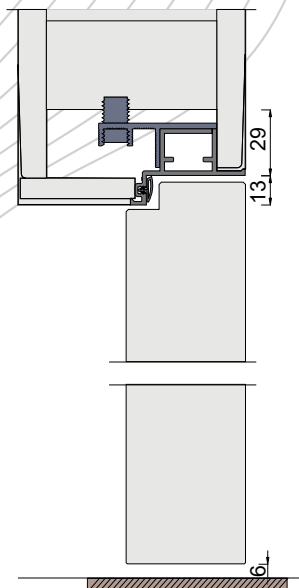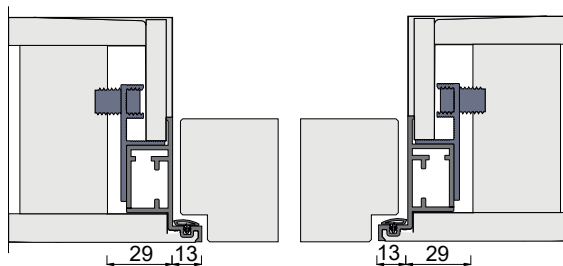

outward
opening

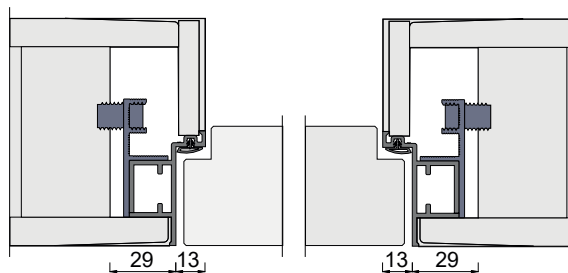

GA02