

PRODUCT CATALOGUE

2024

vau.ee

VILJANDI windows • doors

Internal doors	C
Internal door frames	D
External doors	E
Windows and balcony doors	F
Special products	G



TABLE OF CONTENTS

VILJANDI
windows · doors

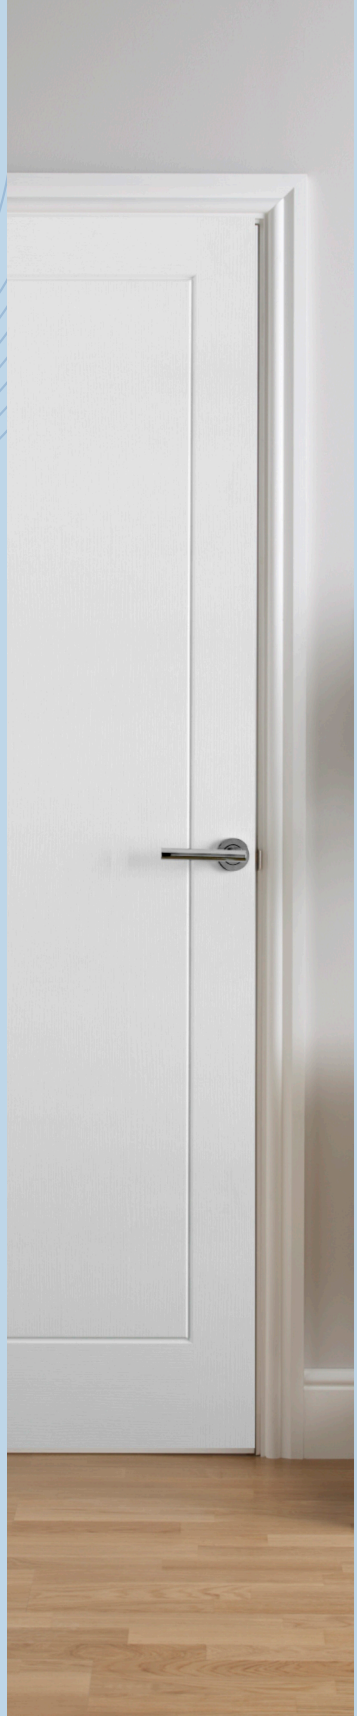

Rebated internal doors ____ CA

Non - rebated internal doors ____ CB

Sliding doors ____ CC

Swing doors ____ CD

Sound insulation doors ____ CE

Sound- and fire resistant doors ____ CF

Security class doors ____ CG

Sidelights ____ CH

Sauna doors ____ CI

Internal door glass opening designs ____ CJ

INTERNAL DOORS

table of contents

VILJANDI windows · doors

CA

Flush internal door _____ **CA01**

Moulded internal door _____ **CA02**

Frame door Forte _____ **CA04**

Frame door Sensa _____ **CA05**

Rebated internal doors

table of contents

VILJANDI
windows · doors

VILJANDI windows · doors

REBATED FLUSH INTERNAL DOOR

CA01

The internal door is for use in heated work- and living quarters. The door is not suitable for outdoor use and between rooms with different air temperatures.

The door is compatible with frame profile SU290 or SU320D.

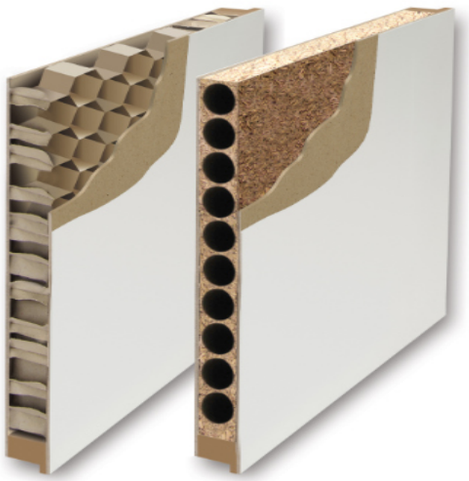



TECHNICAL DATA

Size	one sided M7-10 x M20-21 extended M13,4 x M20-21 double sided M13,4;15,4;17,4;19,4 x M20-21
Door leaf	rebated, thickness 40mm
Locking system	lock case 2014
Hinges	FT-65
Finishing	white(S 0502-Y)
Glass	4mm clear, diamante, cotzwold or satinovo
Glazing bar	plastic profile
Extras	ventilation grille, special paint, veneer, laminate, frame, threshold, increasing moisture resistance

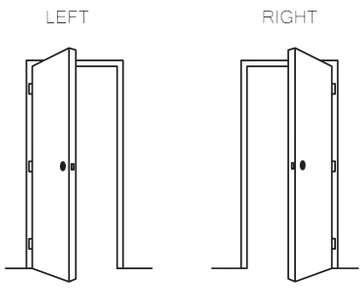

It is possible to get special solutions. More information from the representative.

vau.ee

CA01

VILJANDI windows · doors

REBATED FLUSH INTERNAL DOOR

	H	B	W	A	A1	A2
M7			690	643	606	589
M8			790	743	706	689
M9			890	843	806	789
M10			990	943	906	889
M13,4 (7+7)			1330	643+643	1246	1208
M13,4(10+4)			1330	943+343	1246	1208
M20	1990	1948				
M21	2090	2048				

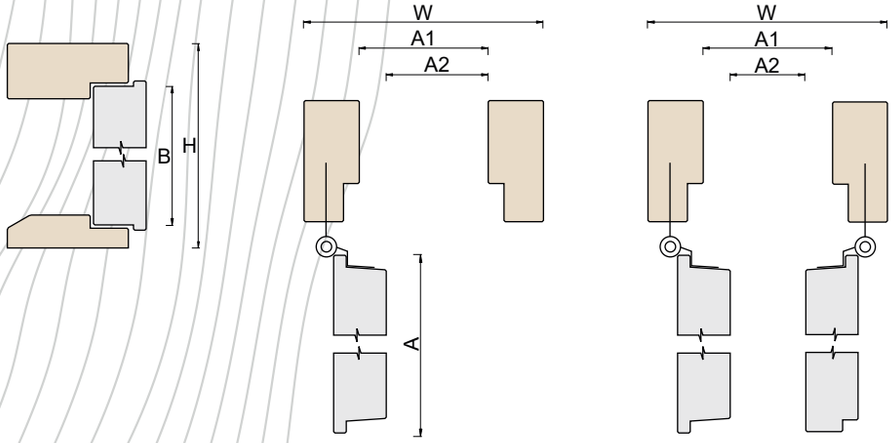

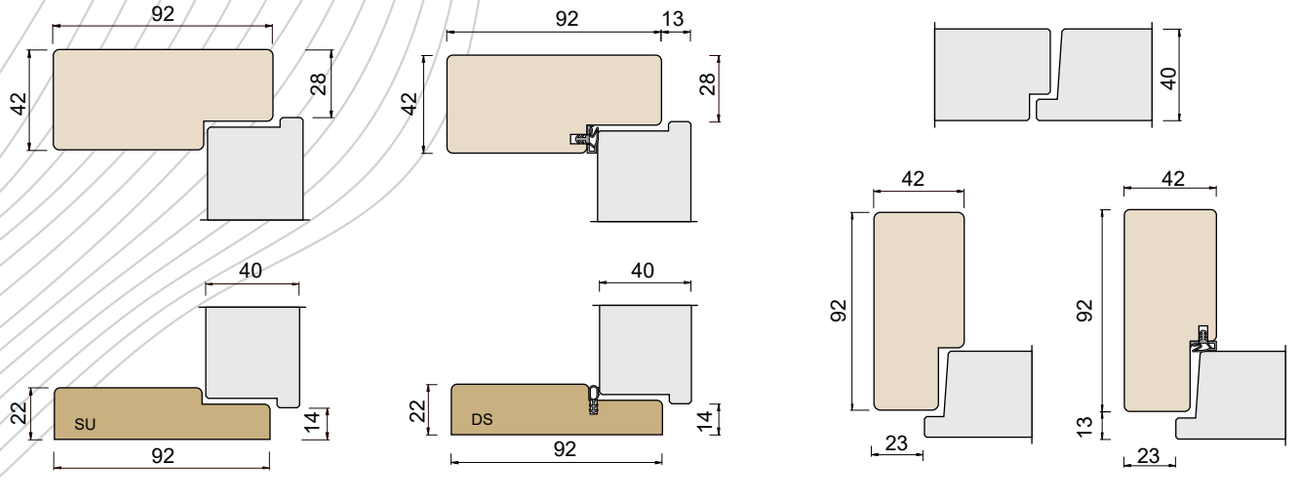

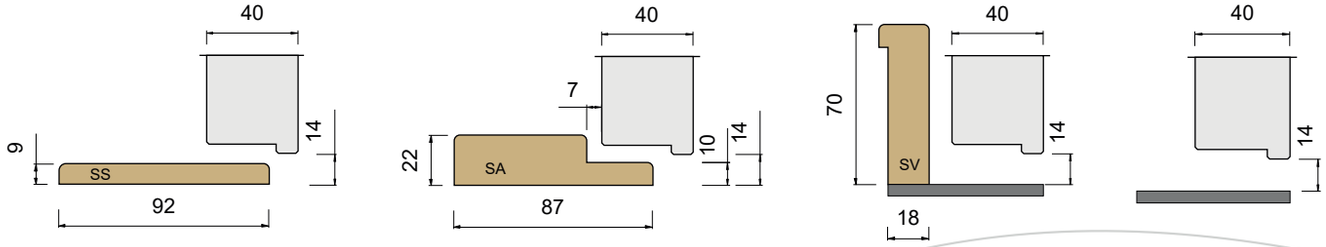

vau.ee

20221013

VILJANDI windows · doors

REBATED MOULDED INTERNAL DOOR

CA02

The internal door is for use in heated work- and living quarters. The door is not suitable for outdoor use and between rooms with different air temperatures.

The door is compatible with frame profile SU290 or SU320D.





TECHNICAL DATA

Size	one sided M7-10 x M20-21 extended M13,4 x M20-21 double sided M13,4;15,4;17,4;19,4 x M20-21
Door leaf	rebated, thickness 40mm
Locking system	lock case 2014
Hinges	FT-65
Finishing	white(S 0502-Y)
Glass	4mm clear, diamante, cotzwold or satinovo
Glazing bar	plastic profile
Extras	ventilation grille, frame, threshold, increasing moisture resistance

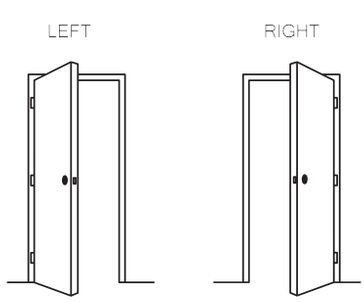

It is possible to get special solutions. More information from the representative.

vau.ee

CA02

VILJANDI windows · doors

REBATED MOULDED INTERNAL DOOR

	H	B	W	A	A1	A2
M7			690	643	606	589
M8			790	743	706	689
M9			890	843	806	789
M10			990	943	906	889
M13,4 (7+7)			1330	643+643	1246	1208
M13,4(10+4)			1330	943+343	1246	1208
M20	1990	1948				
M21	2090	2048				

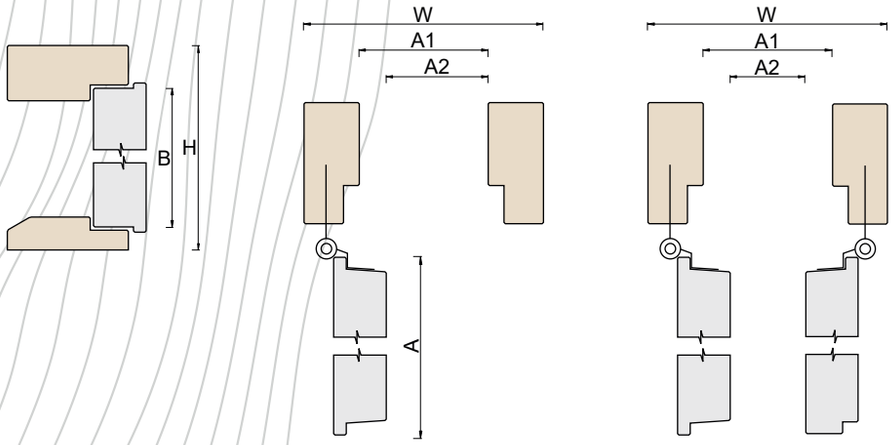

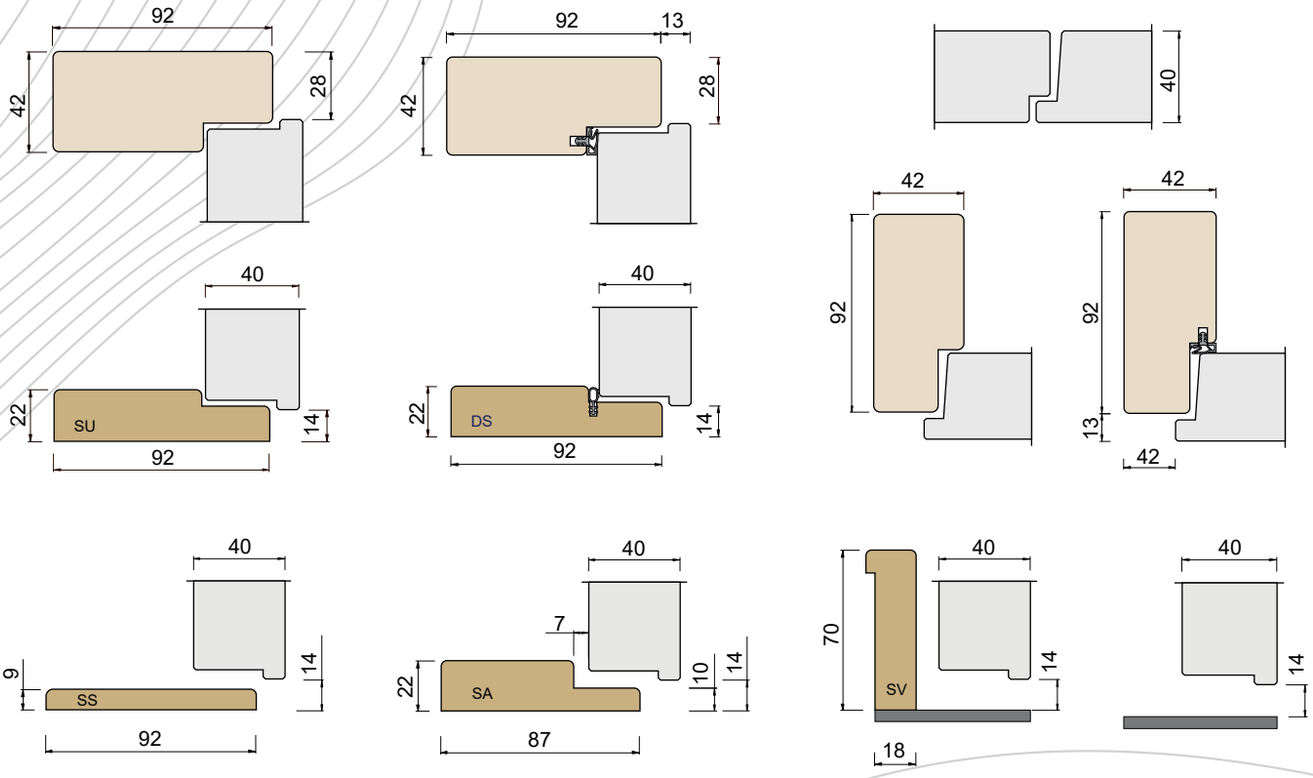

vau.ee

VILJANDI windows · doors

REBATED FRAME DOOR FORTE

CA04

Forte is a framed internal door for use in heated work- and living quarters. The door is not suitable for outdoor use and between rooms with different air temperatures.

The door is compatible with frame profile SU290 or SU320D.





TECHNICAL DATA

Size	one sided M7-10 x M20-21 extended M13,4 x M20-21 double sided M13,4;15,4;17,4;19,4 x M20-21
Door leaf	rebated, thickness 40mm
Locking system	lock case 2014
Hinges	FT-65
Finishing	white(S 0502-Y)
Glass	4mm clear, diamante, cotzwold or satinovo
Glazing bar	none
Extras	special colour, frame, threshold

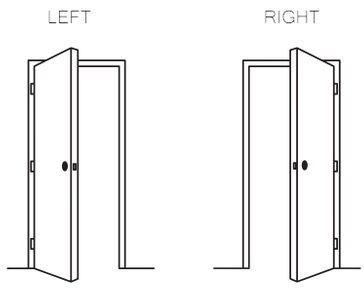

It is possible to get special solutions. More information from the representative.

vau.ee

20230612

CA04

VILJANDI windows · doors

REBATED FRAME DOOR FORTE

	H	B	W	A	A1	A2
M7			690	643	606	589
M8			790	743	706	689
M9			890	843	806	789
M10			990	943	906	889
M13,4 (7+7)			1330	643+643	1246	1208
M13,4(10+4)			1330	943+343	1246	1208
M20	1990	1948				
M21	2090	2048				

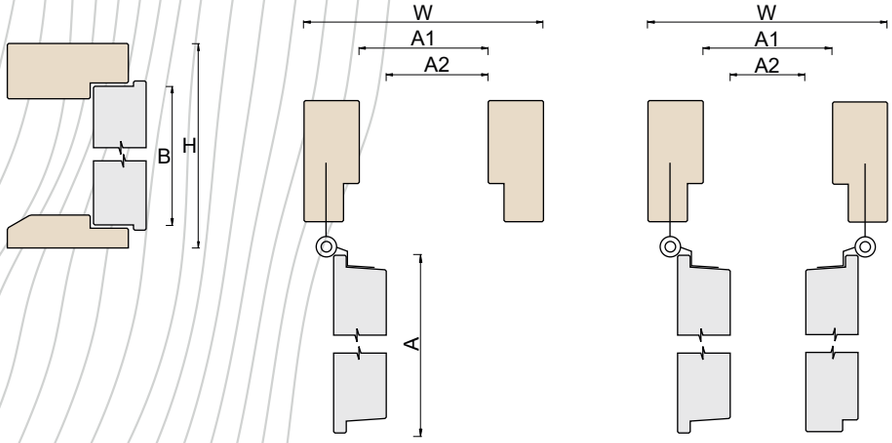

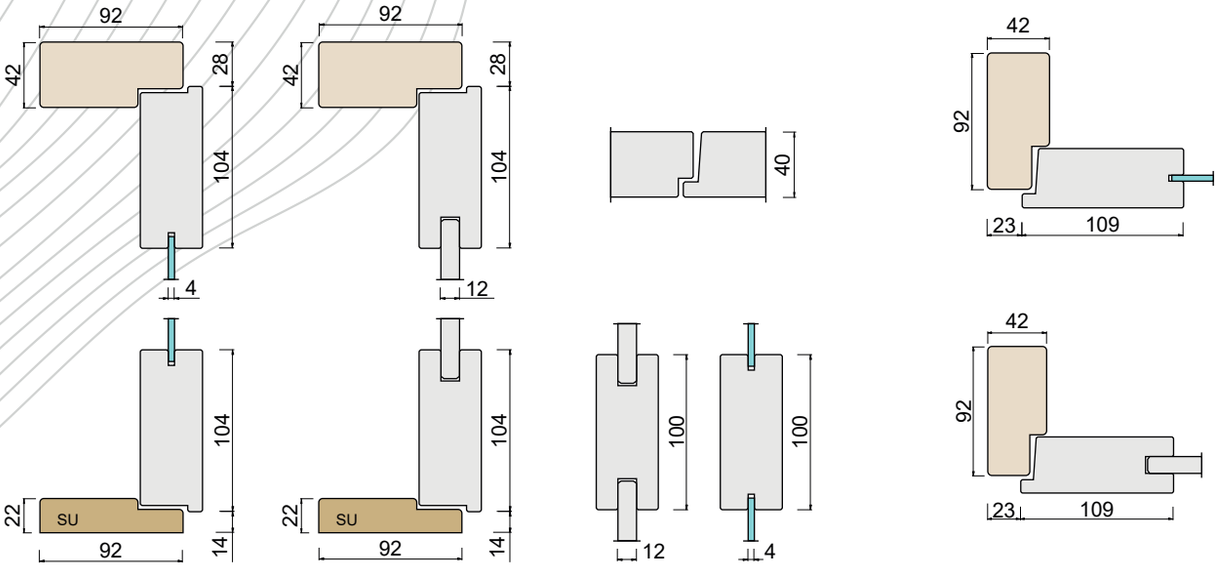

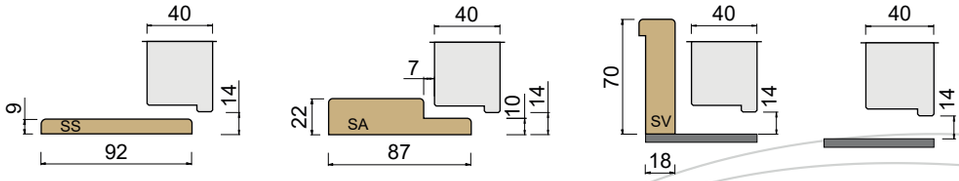

vau.ee

VILJANDI windows · doors

REBATED FRAME DOOR SENSA

CA05

Sensa is a framed internal door for use in heated work- and living quarters. The door is not suitable for outdoor use and between rooms with different air temperatures.

The door is compatible with frame profile SU290 or SU320D.

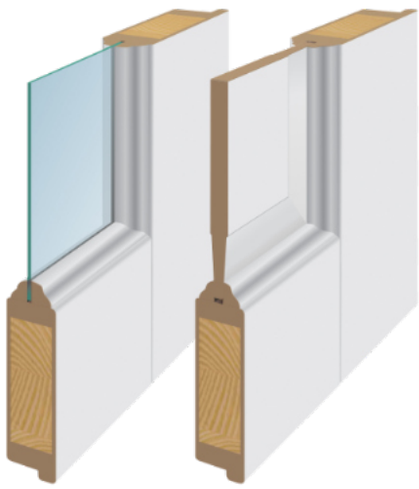



TECHNICAL DATA

Size	one sided M7-10 x M20-21 extended M13,4 x M20-21 double sided M13,4;15,4;17,4;19,4 x M20-21
Door leaf	rebated, thickness 40mm
Locking system	lock case 2014
Hinges	FT-65
Finishing	white(S 0502-Y)
Glass	4mm clear, diamante, cotzwold or satinovo
Glazing bar	none
Extras	special colour, frame, threshold

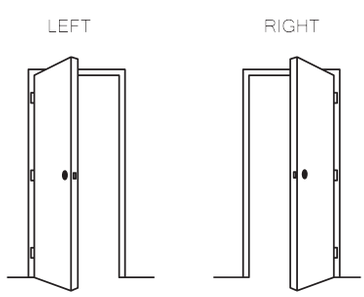

It is possible to get special solutions. More information from the representative.

vau.ee

CA05

VILJANDI windows · doors

REBATED FRAME DOOR SENSA

	H	B	W	A	A1	A2
M7			690	643	606	589
M8			790	743	706	689
M9			890	843	806	789
M10			990	943	906	889
M13,4 (7+7)			1330	643+643	1246	1208
M13,4(10+4)			1330	943+343	1246	1208
M20	1990	1948				
M21	2090	2048				



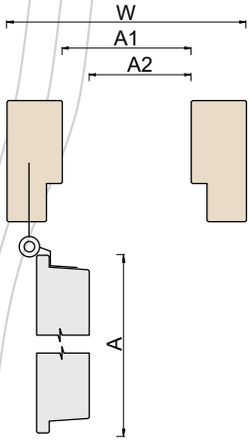

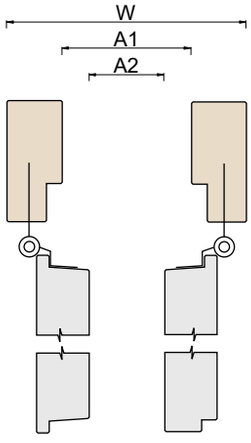

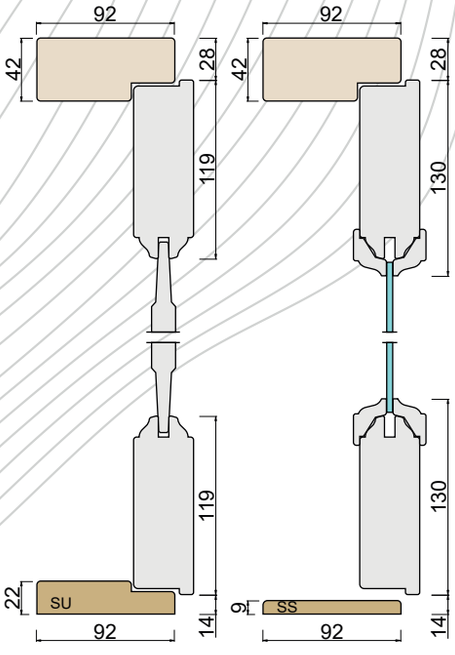

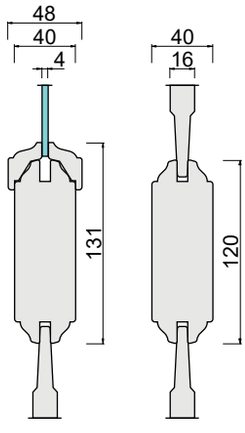











vau.ee

CB

Flush internal door _____ **CB01**

Moulded internal door _____ **CB02**

Frame door Forte _____ **CB04**

Frame door Sensa _____ **CB05**

Non - rebated internal doors

table of contents

VILJANDI
windows · doors

VILJANDI windows · doors

NON - REBATED FLUSH INTERNAL DOOR

CB01

The internal door is for use in heated work- and living quarters. The door is not suitable for outdoor use and between rooms with different air temperatures.

The door is compatible with frame profile RU420 or RU450D.

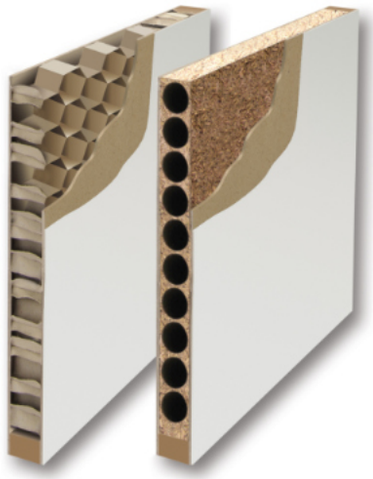



TECHNICAL DATA

Size	one sided M7-10 x M20-21 extended M13;13,3;14 x M20-21 double sided M13,3;15,3;17,3;19,3 x M20-21
Door leaf	non-rebated, thickness 40mm
Locking system	lock case 2014
Hinges	6540
Finishing	white(S 0502-Y)
Glass	4mm clear, diamante, cotzwold or satinovo
Glazing bar	plastic profile
Extras	ventilation grille, special paint, veneer, laminate, frame, threshold, sliding door, increasing moisture resistance

It is possible to get special solutions. More information from the representative.

vau.ee

CB01

VILJANDI windows · doors

NON - REBATED FLUSH INTERNAL DOOR

	H	B	W	A	A1	A2
M7			690	625	606	568
M8			790	725	706	668
M9			890	825	806	768
M10			990	925	906	868
M13,3 (7+7)			1317	625+625	1233	1157
M13,3(10+4)			1317	925+325	1233	1157
M20	1990	1940				
M21	2090	2040				

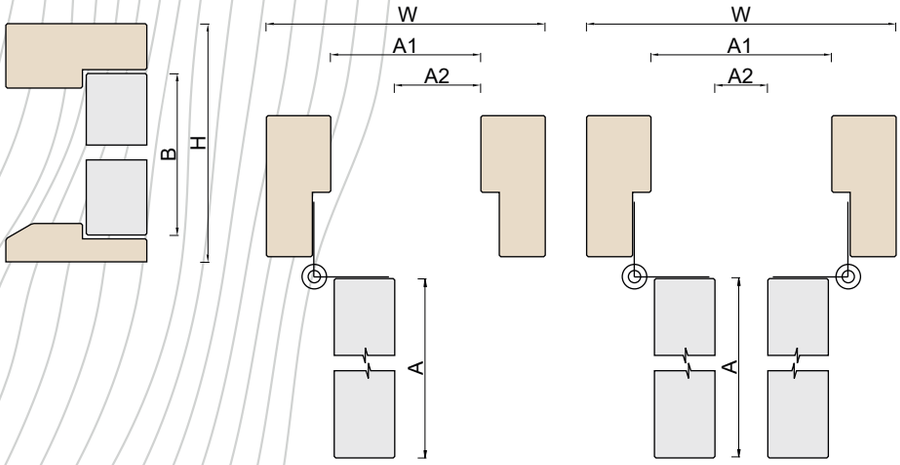

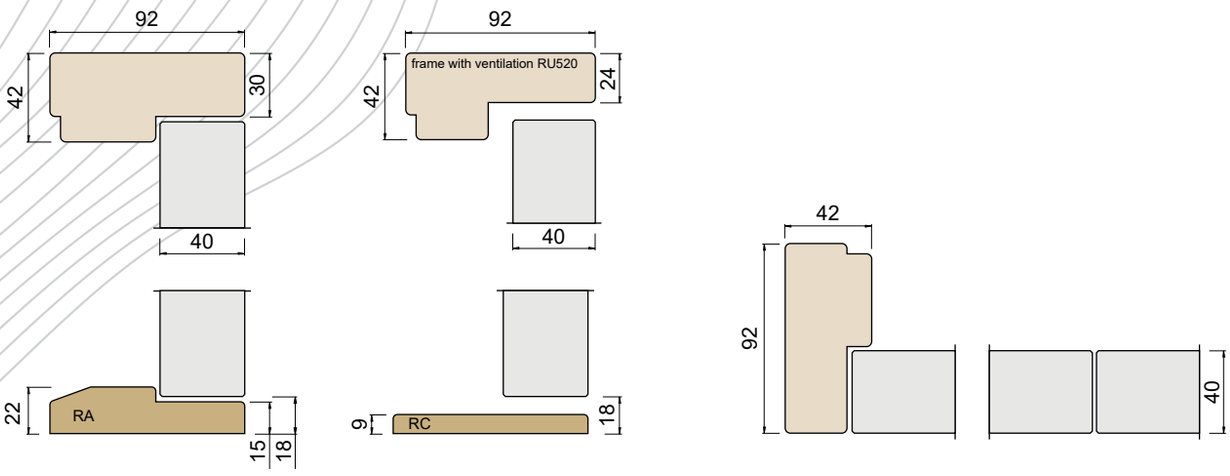

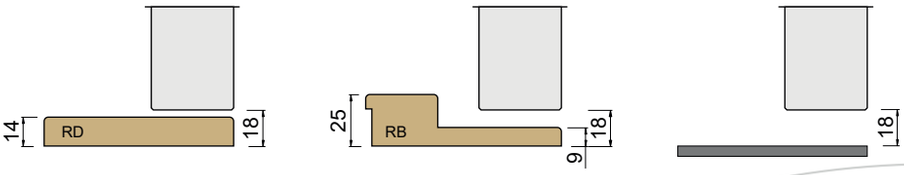

vau.ee

VILJANDI windows · doors

NON - REBATED MOULDED INTERNAL DOOR

CB02

The internal door is for use in heated work- and living quarters. The door is not suitable for outdoor use and between rooms with different air temperatures.

The door is compatible with frame profile RU420 or RU450D.



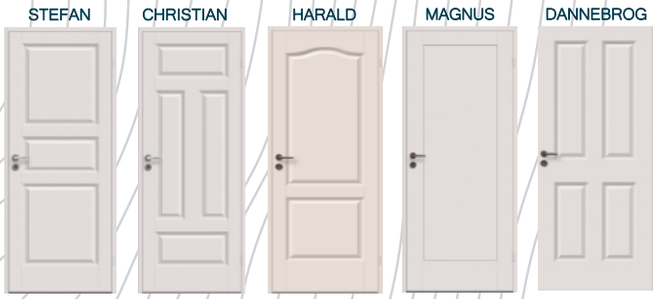

TECHNICAL DATA

Size	one sided M7-10 x M20-21 extended M13;13,3;14 x M20-21 double sided M13,3;15,3;17,3;19,3 x M20-21
Door leaf	non-rebated, thickness 40mm
Locking system	lock case 2014
Hinges	6540
Finishing	white(S 0502-Y)
Glass	4mm clear, diamante, cotzwold or satinovo
Glazing bar	plastic profile
Extras	special paint, frame, threshold, sliding door, increasing moisture resistance

It is possible to get special solutions. More information from the representative.

CB02

VILJANDI windows · doors

NON - REBATED MOULDED INTERNAL DOOR

	H	B	W	A	A1	A2
M7			690	625	606	668
M8			790	725	706	768
M9			890	825	806	868
M10			990	925	906	968
M13,3 (7+7)			1317	625+625	1233	1157
M13,3(10+4)			1317	925+325	1233	1157
M20	1990	1940				
M21	2090	2040				

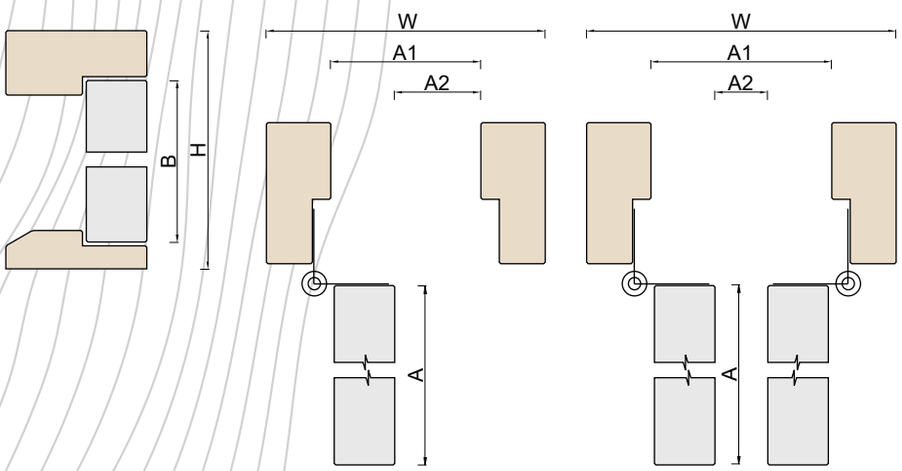

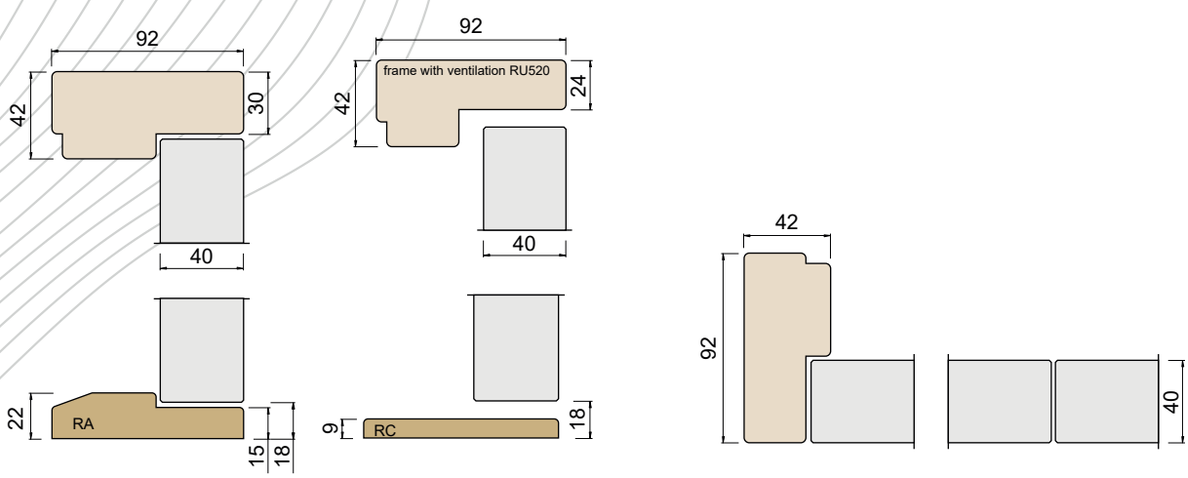

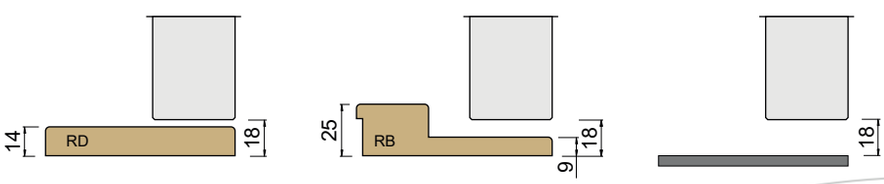

vau.ee

20230209

VILJANDI windows · doors

NON - REBATED FRAME DOOR FORTE

CB04

Forte is a framed internal door for use in heated work- and living quarters. The door is not suitable for outdoor use and between rooms with different air temperatures.

The door is compatible with frame profile RU420 or RU450D.

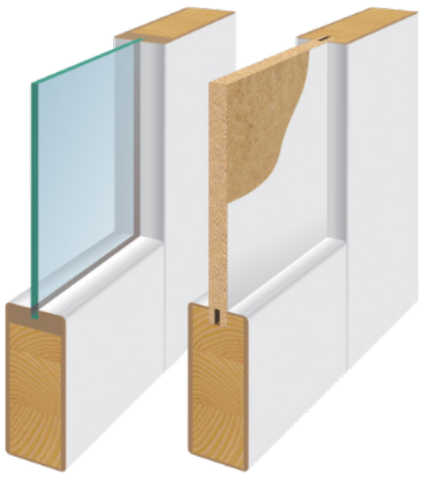



TECHNICAL DATA

Size	one sided M7-10 x M20-21 extended M13;13,3;14 x M20-21 double sided M13,3;15,3;17,3;19,3 x M20-21
Door leaf	non-rebated, thickness 40mm
Locking system	lock case 2014
Hinges	6540
Finishing	white (S 0502-Y)
Glass	4 mm clear, diamante, cotzwold or satinovo
Glazing bar	none
Extras	special colour, frame, threshold, sliding door

It is possible to get special solutions. More information from the representative.

CB04

VILJANDI windows · doors

NON - REBATED FRAME DOOR FORTE

	H	B	W	A	A1	A2
M7			690	625	606	568
M8			790	725	706	668
M9			890	825	806	768
M10			990	925	906	868
M13,3 (7+7)			1317	625+625	1233	1157
M13,3(10+4)			1317	925+325	1233	1157
M20	1990	1940				
M21	2090	2040				

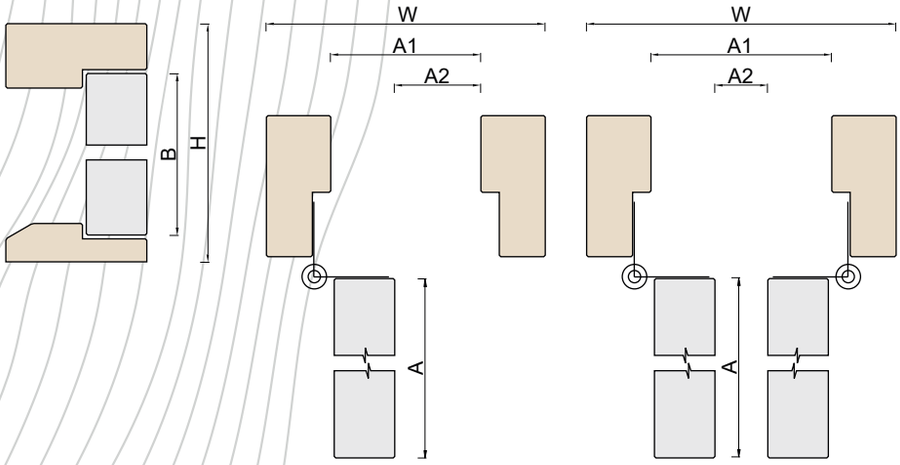

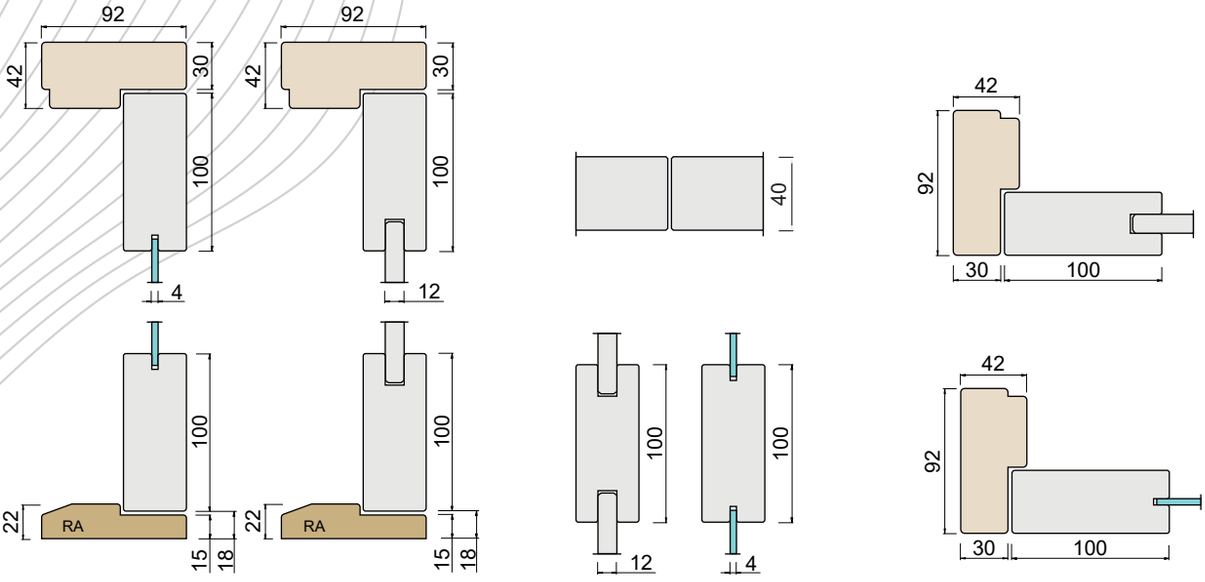



vau.ee

20230612

VILJANDI windows · doors

NON - REBATED FRAME DOOR SENSA

CB05

Sensa is a framed internal door for use in heated work- and living quarters. The door is not suitable for outdoor use and between rooms with different air temperatures.

The door is compatible with frame profile RU420 or RU450D.

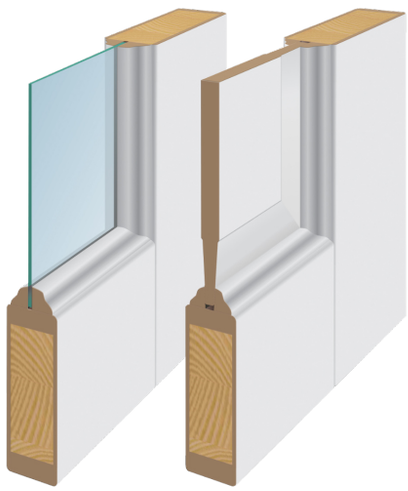



TECHNICAL DATA

Size	one sided M7-10 x M20-21 extended M13;13,3;14 x M20-21 double sided M13,3;15,3;17,3;19,3 x M20-21
Door leaf	non-rebated, thickness 40mm
Locking system	lock case 2014
Hinges	6540
Finishing	white (S 0502-Y)
Glass	4mm clear, diamante, cotzwold or satinovo
Glazing bar	none
Extras	special colour, frame, threshold, sliding door

It is possible to get special solutions. More information from the representative.

vau.ee

CB05

VILJANDI windows · doors

NON - REBATED FRAME DOOR SENSA

	H	B	W	A	A1	A2
M7			690	625	606	550
M8			790	725	706	650
M9			890	825	806	750
M10			990	925	906	850
M13,3 (7+7)			1317	625+625	1233	1157
M13,3(10+4)			1317	925+325	1233	1157
M20	1990	1940				
M21	2090	2040				

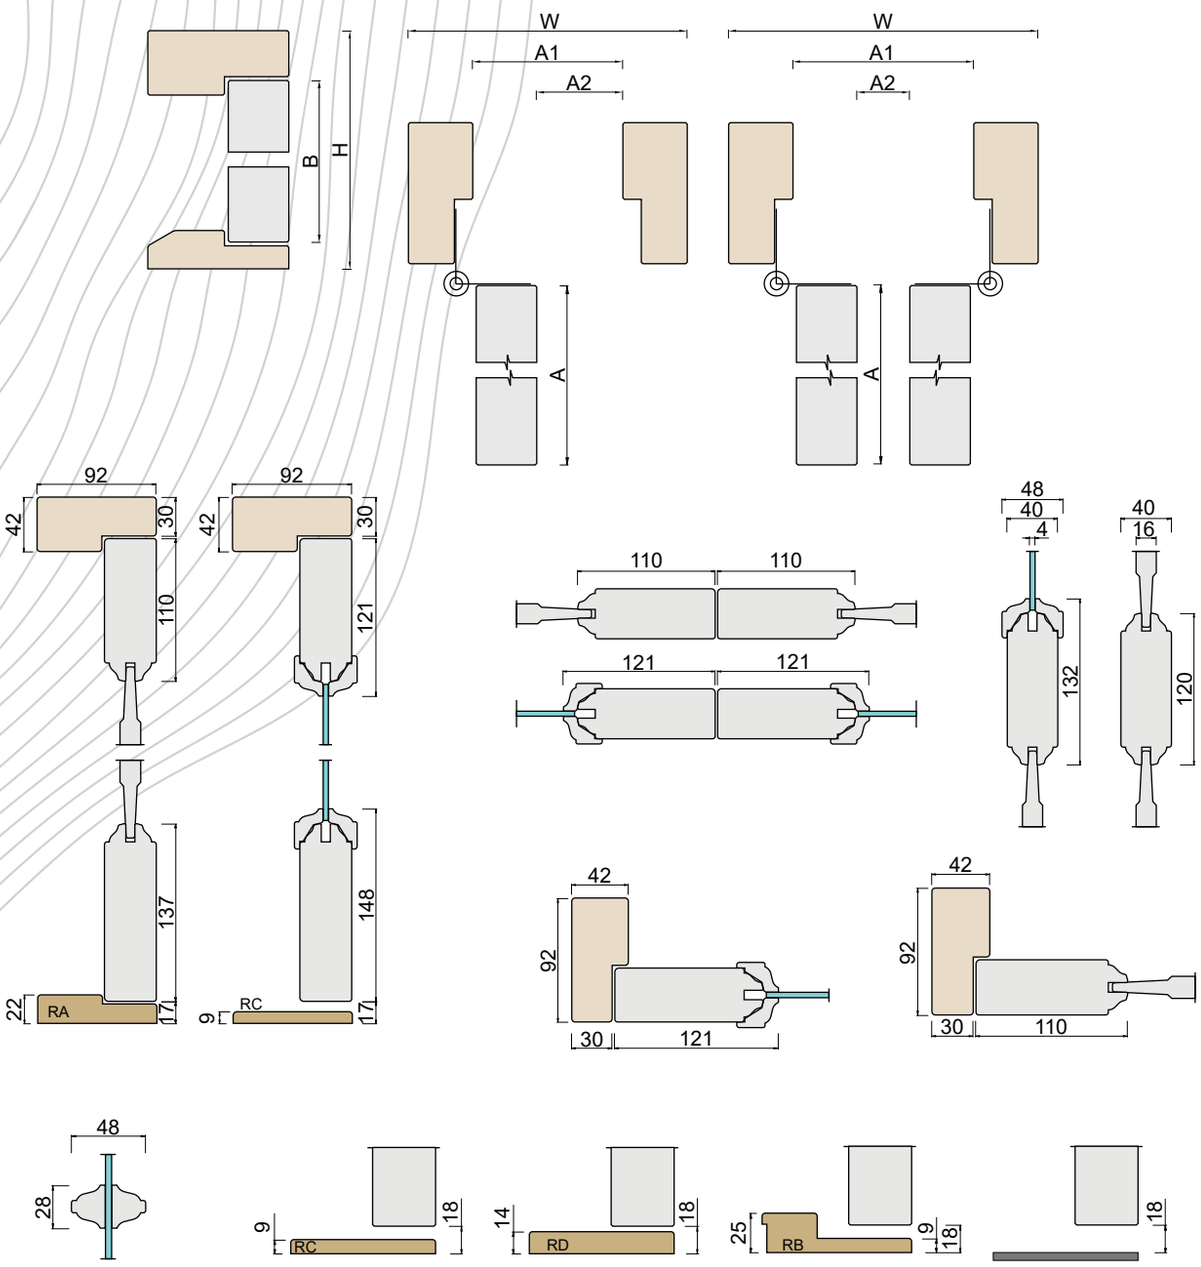

vau.ee

Mounted to the wall ____ **CC01**

Mounted to the ceiling ____ **CC02**

Rail cover ____ **CC04**

Frame ____ **CC05**

Sliding doors

table of contents

VILJANDI
windows · doors

VILJANDI
windows · doors

MOUNTED TO THE WALL

CC01

The sliding door is for use in heated work- and living quarters. The door is not suitable for outdoor use and between rooms with different air temperatures.

Produced with the constructions of flush-, pine-, moulded-, and frame doors.





TECHNICAL DATA

Size	one sided M7-10 x M20-21
	can be produced as a double-sided
Door leaf	thickness 40mm
Locking system	shell handle or lockable hook-lock
Finishing	according to the model
Glass	4mm clear, diamante, cotzwold or satinovo
Glazing bar	according to the door model
Extras	frame, MDF or aluminum rail cover

It is possible to get special solutions. More information from the representative.

vau.ee

CC01

VILJANDI windows · doors

MOUNTED TO THE WALL

	B	A
M7		625
M8		725
M9		825
M10		925
M20	1940	
M21	2040	

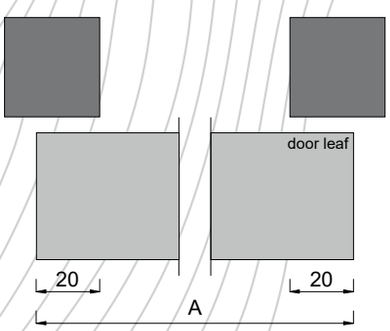

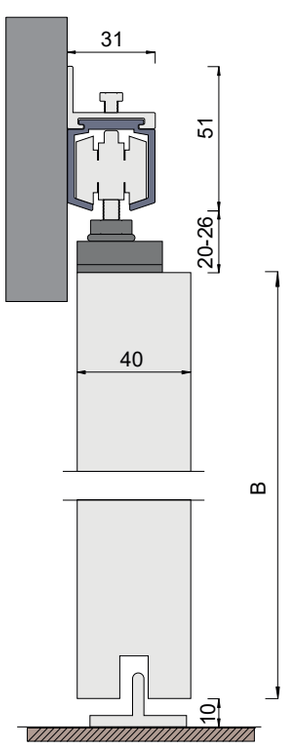

vau.ee

VILJANDI windows · doors

MOUNTED TO THE CEILING

CC02

The sliding door is for use in heated work- and living quarters. The door is not suitable for outdoor use and between rooms with different air temperatures..

Produced with the constructions of flush-, pine-, moulded-, and frame doors.





TECHNICAL DATA

Size	one sided M7-10 x M20-21
	can be produced as a double-sided
Door leaf	thickness 40mm
Locking system	shell handle or lockable hook-lock
Finishing	according to the model
Glass	4mm clear, diamante, cotzwold or satinovo
Glazing bar	according to the door model
Extras	frame, MDF or aluminum rail cover

It is possible to get special solutions. More information from the representative.

vau.ee

CC02

VILJANDI windows · doors

MOUNTED TO THE CEILING

	B	A
M7		625
M8		725
M9		825
M10		925
M20	1940	
M21	2040	

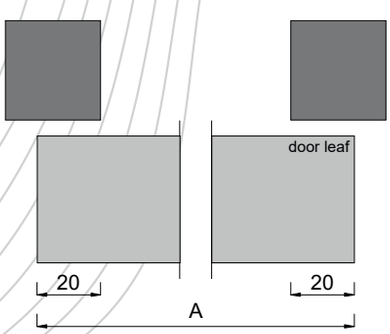

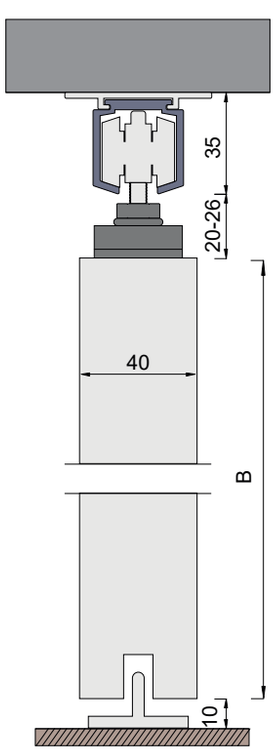

vau.ee

VILJANDI
windows · doors

SLIDING DOOR RAIL COVER

CC04

The sliding door rail cover is used to hide the door rail mechanism. The rail cover is suitable for wall and / or ceiling mounted rail systems.

The rail cover is made of MDF or aluminum.

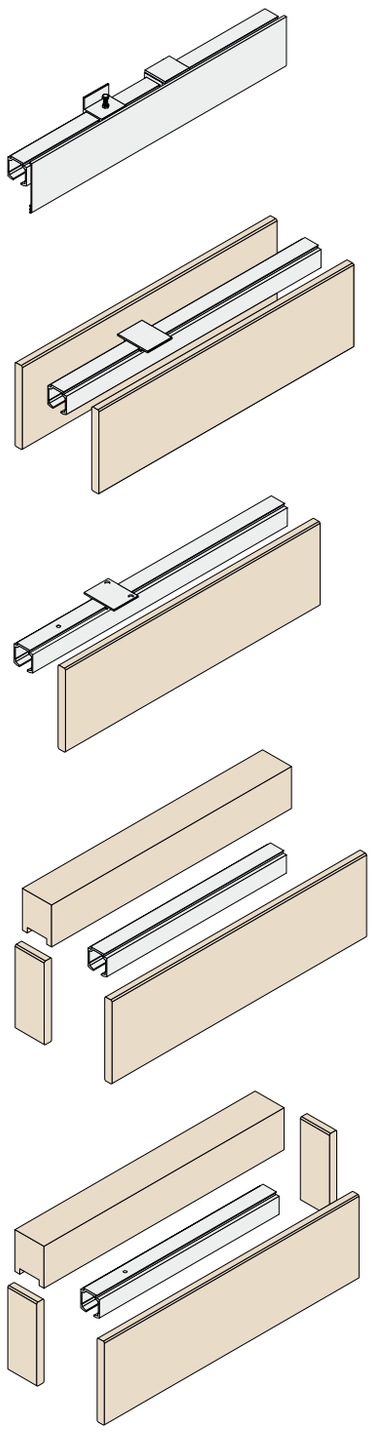

TECHNICAL DATA

Size	according to the order
Finishing	MDF rail cover white (S 0502-Y), special color or veneered. The aluminum rail cover is gray.

It is possible to get special solutions. More information from the representative.

VILJANDI windows · doors

FRAME

CC05

The sliding door frame is used for interior or lockable doors.

The frame is suitable for use in heated work- and living rooms.

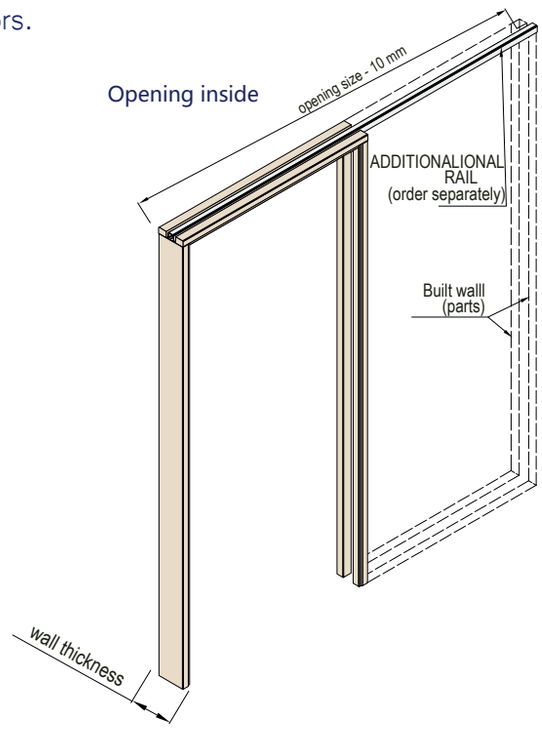

TECHNICAL DATA

Size	according to order
Frame	depth according to wall thickness
Finishing	white (S 0502-Y) or special colour
Mounting hole	Ø16/5, comes with frame caps

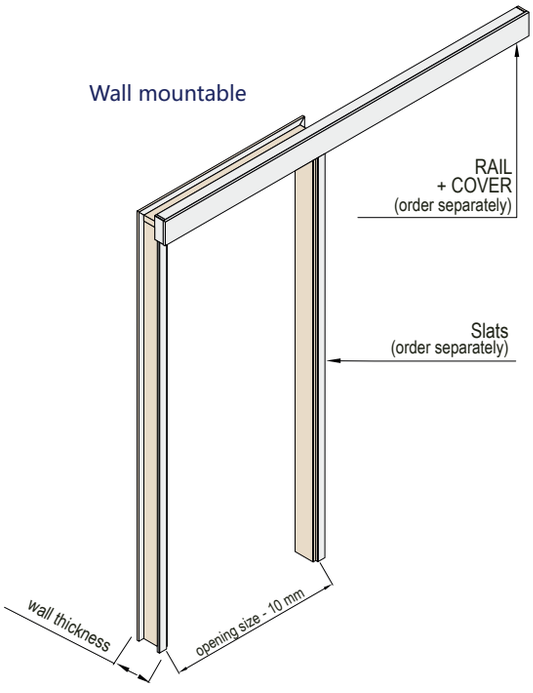

It is possible to get special solutions. More information from the representative.

vau.ee

CD

Swing door CD01

Swing doors

table of contents

VILJANDI
windows · doors

VILJANDI windows · doors

SWING DOOR

CD01

Swing door is for use in heated work- and living quarters. The door is not suitable for outdoor use and between rooms with different air temperatures.



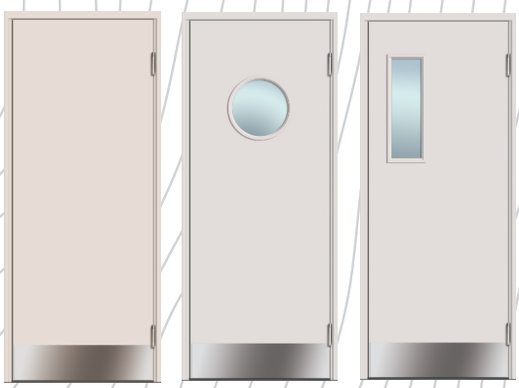

TECHNICAL DATA

Size	one sided M7-10 x M20-21 can be produced as a double-sided
Locking system	thickness 40mm
Frame	pine, depth 92mm
Lock	none
Hinges	swing hinges
Finishing	white (S 0502-Y), special colour
Glass	4mm clear, diamante, cotzwold or satinovo
Glazing bar	plastic profile
Extras	stainless steel kick plate, veneer coating, laminate coating

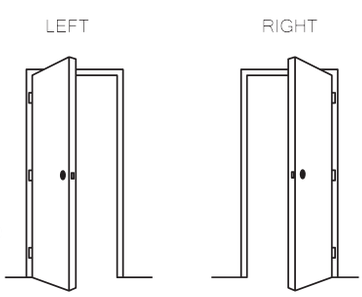

It is possible to get special solutions. More information from the representative.

vau.ee

CD01

VILJANDI windows · doors

SWING DOOR

	H	B	W	A	A2
M7			690	597	550
M8			790	697	650
M9			890	797	750
M10			990	897	850
M13(in the middle)			1290	597+597	1096
M20	1990	1935			
M21	2090	2035			

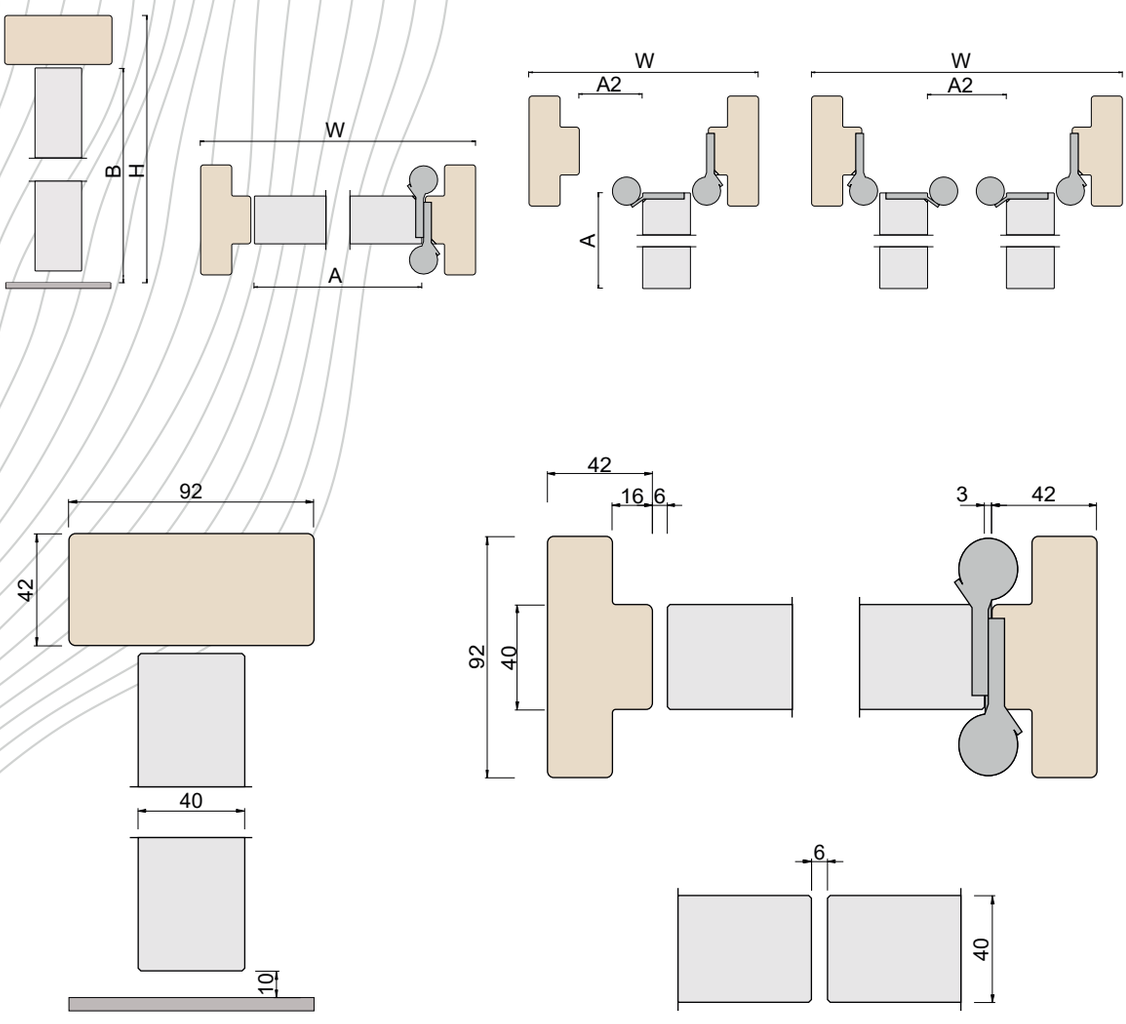

vau.ee

CE

SD30 ____ **CE01**

SD40 ____ **CE02**

SD09 ____ **CE03**

FD18 ____ **CE04**

D03 ____ **CE05**

FD06 Sound ____ **CE06**

Sound insulation doors

table of contents

VILJANDI
windows · doors

VILJANDI windows · doors

SOUND INSULATION DOOR SD30

CE01

SD30 is a wooden sound insulation door for use in heated work and living areas to close openings between sound insulating sections.

The temperature difference between the rooms to be separated must not exceed 5 ° C.

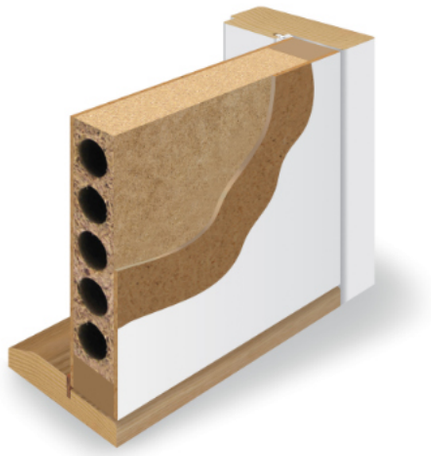

Sound insulation Rw 30dB

TECHNICAL DATA

Size	M7-10 x M20-21
Door leaf	non-rebated, thickness 40 mm
Frame	pine, thickness 92mm
Threshold	oak, height 22mm
Locking system	lock case 2014 and striking plate 0033
Hinges	6540
Finishing	white (S 0502-Y) or special colour
Extras	stainless steel kick plate, surface mounted door closer, grooved patterns, veneer cover, glued decorative panels and / or moldings, laminate cover, additional lock case



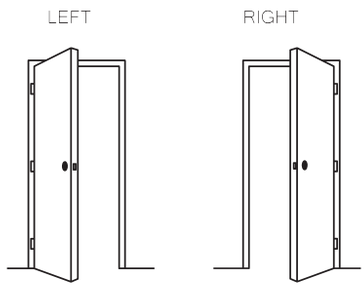

It is possible to get special solutions. More information from the representative.

vau.ee

CE01

VILJANDI windows · doors

SOUND INSULATION DOOR SD30

	H	B	W	A	A1	A2
M7			690	625	606	558
M8			790	725	706	658
M9			890	825	806	758
M10			990	925	906	858
M20	1990	1940				
M21	2090	2040				

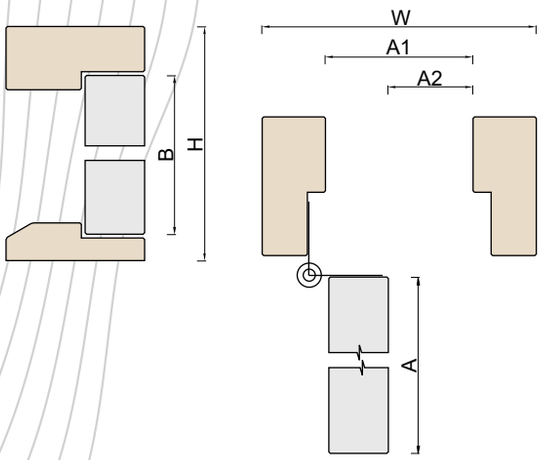

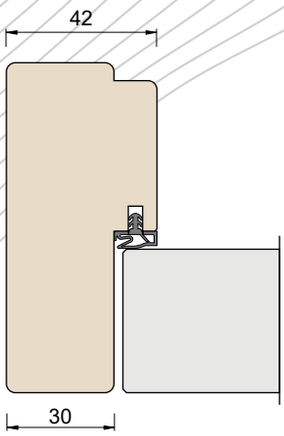

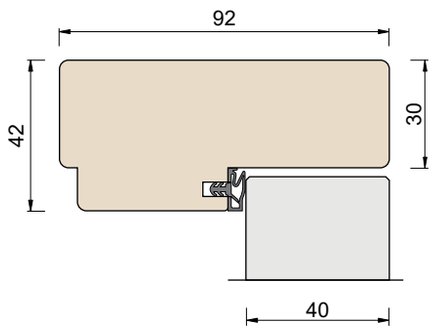

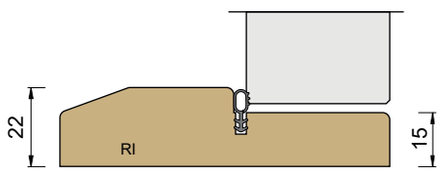

vau.ee

VILJANDI windows · doors

SOUND INSULATION DOOR SD40

CE02

SD40 is a wooden sound insulation door for use in heated work and living areas to close openings between sound insulating sections.

The temperature difference between the rooms to be separated must not exceed 5 ° C.

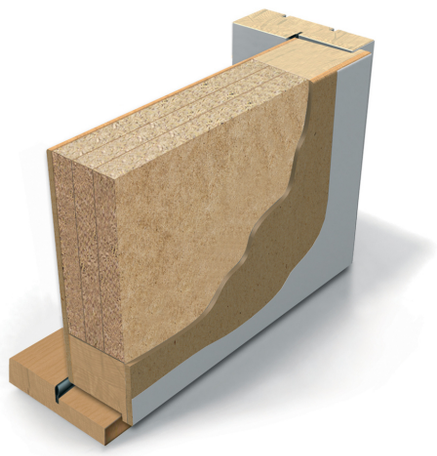

Sound insulation Rw 37-38dB

dB

TECHNICAL DATA



Size	M7-10 x M20-21
Door leaf	rebated, thickness 40mm
Frame	pine, depth 92mm
Threshold	oak, height 22mm
Locking system	lock case ASSA 565 and striking plate 2863-6
Hinges	plate hinges NTR 110-30
Finishing	white (S 0502-Y) or special colour
Extras	stainless steel kick plate, surface mounted door closer, grooved patterns, veneer cover, glued decorative panels and / or moldings, laminate cover, additional lock case

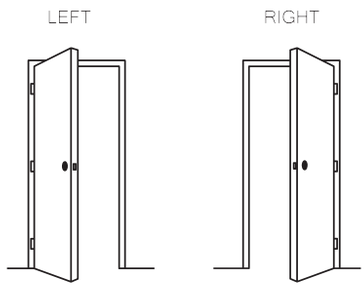

It is possible to get special solutions. More information from the representative.

vau.ee

CE02

VILJANDI windows · doors

SOUND INSULATION DOOR SD40

	H	B	W	A	A1	A2
M7			690	645	606	589
M8			790	745	706	689
M9			890	845	806	789
M10			990	945	906	889
M20	1990	1948				
M21	2090	2048				

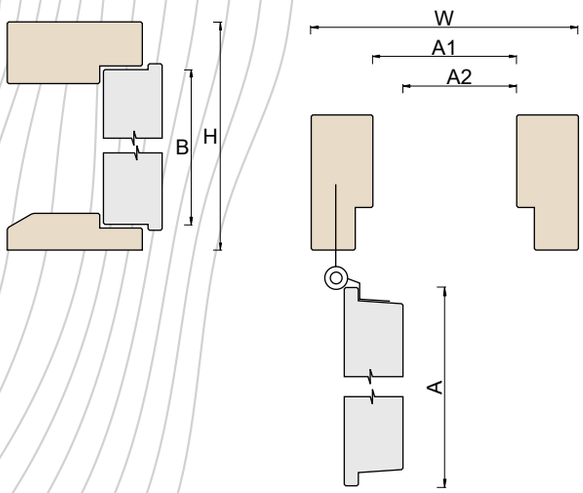

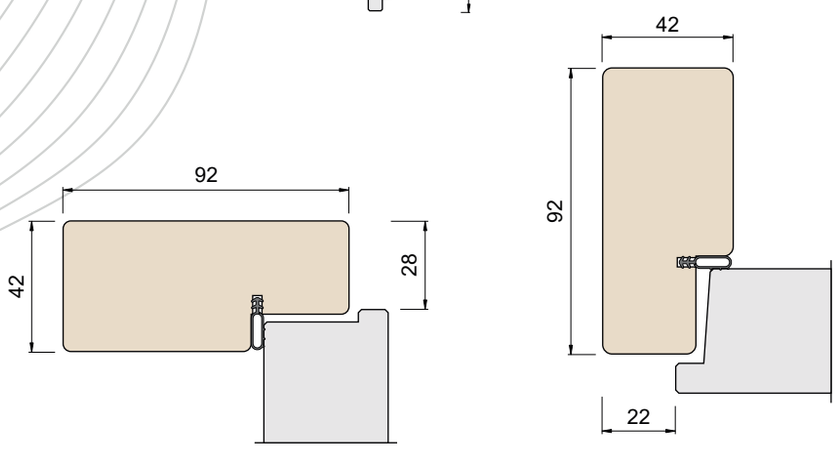

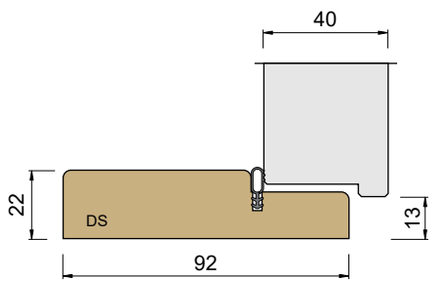



vau.ee

VILJANDI windows · doors

SOUND INSULATION DOOR SD09

CE03

SD09 is a wooden sound insulation door for use in heated work and living areas to close openings between sound insulating sections.

The temperature difference between the rooms to be separated must not exceed 5 ° C.

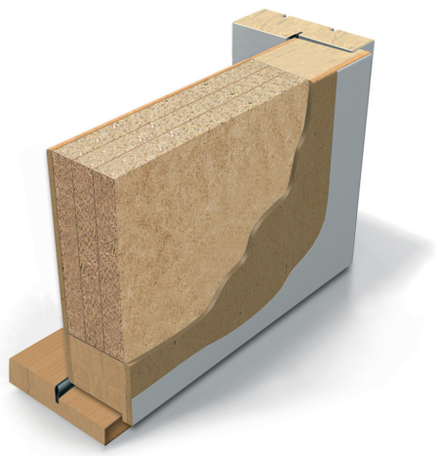

Sound insulation Rw 36-39dB

dB

TECHNICAL DATA



Size	M7-10 x M20-21
Door leaf	rebated, thickness 52mm
Frame	pine, depth 92mm
Threshold	oak, height 25mm
Locking system	lock case ASSA 565 and striking plate LP732
Hinges	plate hinges NTR 110-30
Finishing	white (S 0502-Y) or special colour
Glass	laminated clear
Extras	stainless steel kick plate, surface mounted door closer, grooved patterns, veneer cover, glued decorative panels and / or moldings, laminate cover, mailbox, door eye, doorbell, additional lock case

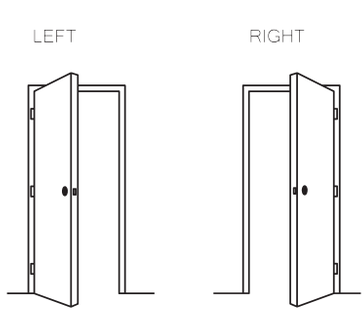

It is possible to get special solutions. More information from the representative.

vau.ee

CE03

VILJANDI windows · doors

SOUND INSULATION DOOR SD09

	H	B	W	A	A1	A2
M7			690	645	606	577
M8			790	745	706	677
M9			890	845	806	777
M10			990	945	906	877
M20	1990	1954				
M21	2090	2054				

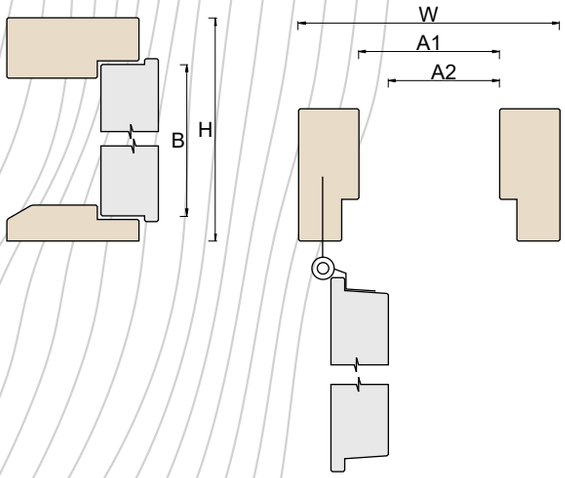

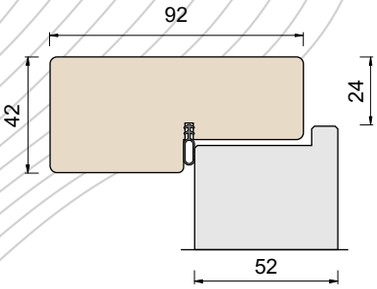

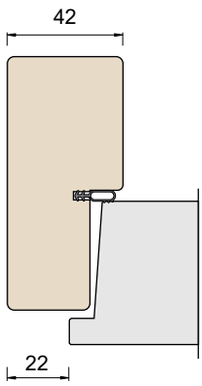



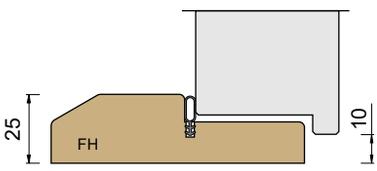

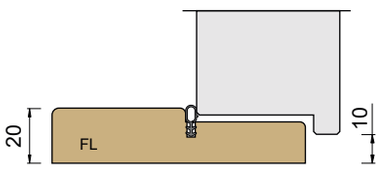



vau.ee

VILJANDI windows · doors

SOUND INSULATION DOOR FD18-SOUND

CE04

FD18-Sound is a wooden sound insulation door for use in heated work and living areas to close openings between sound insulating sections.

The temperature difference between the rooms to be separated must not exceed 5 ° C.



Sound insulation Rw 38-40dB

dB

TECHNICAL DATA



Size	M7-10 x M20-21
Door leaf	non-rebated, 54mm thick
Frame	pine, thickness 92mm
Threshold	oak, height 25mm
Locking system	lock case ASSA 565 and striking plate LP712
Hinges	plate hinges Abloy 3248
Finishing	white (S 0502-Y) or special colour
Glass	laminated clear
Extras	additional lock case, doorbell, door eye, door closer, stainless steel kick plate, veneer cover, grooved patterns, adhesive decorative panels and/or moldings, descending threshold, postbox, glass inserts

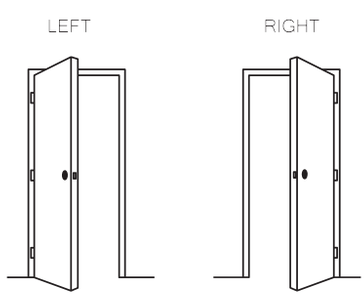

It is possible to get special solutions. More information from the representative.

vau.ee

CE04

VILJANDI windows · doors

SOUND INSULATION DOOR FD18-SOUND

	H	B	W	A	A1	A2
M7			690	625	606	550
M8			790	725	706	650
M9			890	825	806	750
M10			990	925	906	850
M20	1990	1940				
M21	2090	2040				

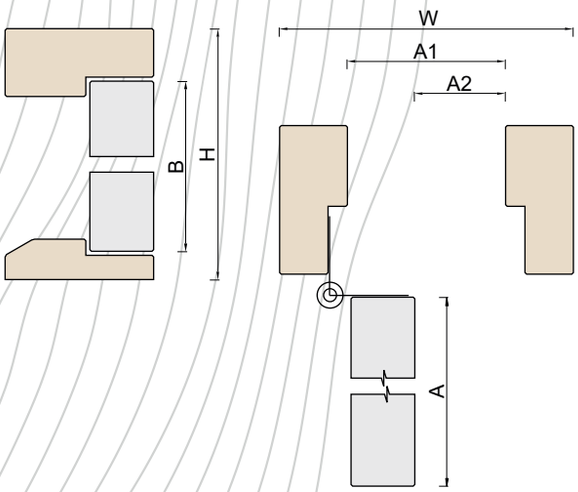















vau.ee

VILJANDI windows · doors

SOUND INSULATION DOOR D03

CE05

D03 is a wooden sound insulation door for use in heated work and living areas to close openings between sound insulating sections.

The temperature difference between the rooms to be separated must not exceed 5 ° C.

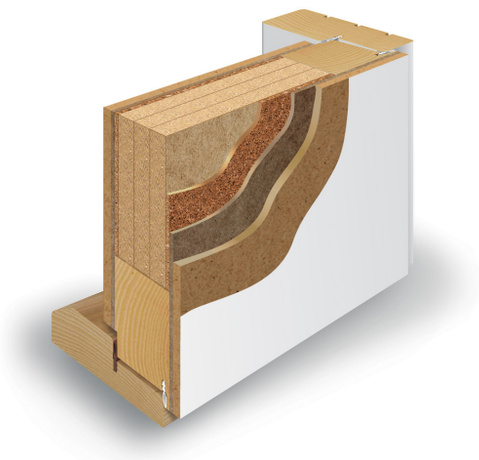

Sound insulation Rw 42dB

TECHNICAL DATA

Size	M7-10 x M20-21
Door leaf	rebated, thickness 63mm
Frame	pine, depth 92mm
Threshold	oak, height 27mm
Locking system	ASSA 565 lock case and striking plate LP732
Hinges	plate hinges NTR 110-30
Finishing	white (S 0502-Y) or special colour
Extras	stainless steel kick plate, surface mounted door closer, veneer cover, glued decorative panels and /or moldings, grooved patterns



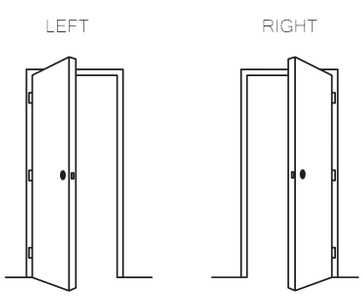

It is possible to get special solutions. More information from the representative.

vau.ee

CE05

VILJANDI windows · doors

SOUND INSULATION DOOR D03

	H	B	W	A	A1	A2
M7			690	645	606	568
M8			790	745	706	668
M9			890	845	806	768
M10			990	945	906	868
M20	1990	1954				
M21	2090	2054				

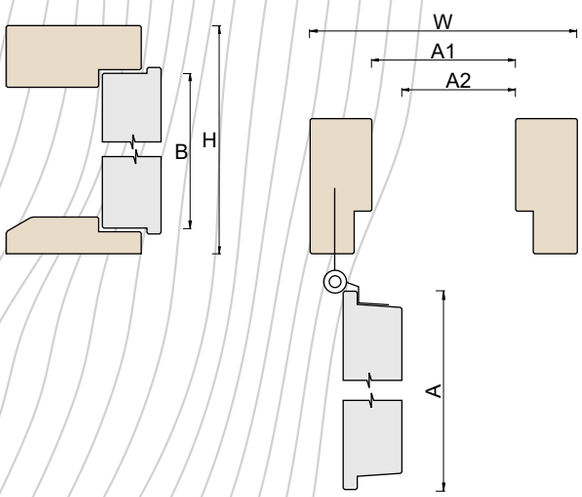

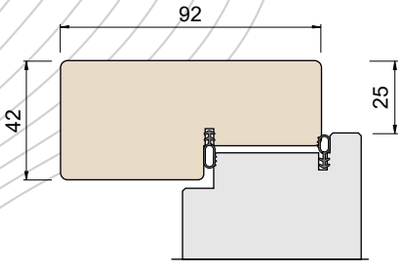

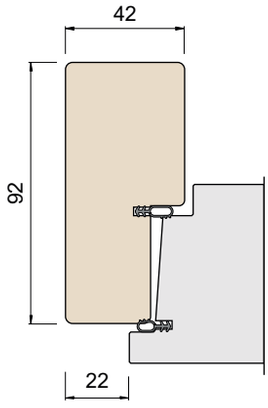

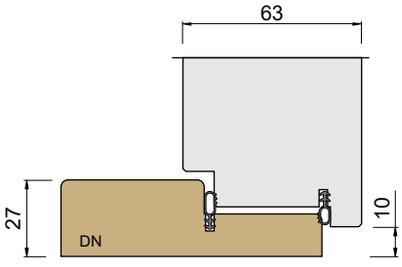

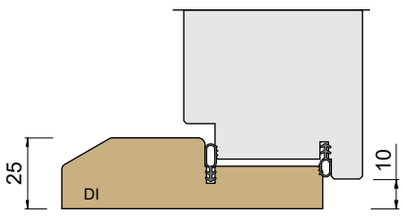

vau.ee

VILJANDI windows · doors

SOUND INSULATION DOOR FD06-SOUND

CE06

FD06-Sound is a wooden sound insulation door for use in heated work and living areas to close openings between sound insulating sections.

The temperature difference between the rooms to be separated must not exceed 5 ° C.



Sound insulation Rw 40-43dB

dB C0



TECHNICAL DATA

Size	M7-10 x M20-21
Door leaf	rebated, 68mm thick
Frame	pine, thickness 92mm
Threshold	oak, height 25mm
Locking system	lock case ASSA 565 and striking plate LP732
Hinges	plate hinges NTR 110-30
Finishing	white (S 0502-Y) or special colour
Glass	laminated clear
Extras	door closer, stainless steel kick plate, veneer cover, grooved patterns, adhesive decorative panels and/or moldings

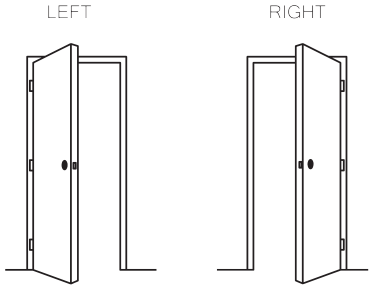

It is possible to get special solutions. More information from the representative.

vau.ee

CE06

VILJANDI windows · doors

SOUND INSULATION DOOR FD06-SOUND

	H	B	W	A	A1	A2
M7			690	645	606	568
M8			790	745	706	668
M9			890	845	806	768
M10			990	945	906	868
M20	1990	1954				
M21	2090	2054				

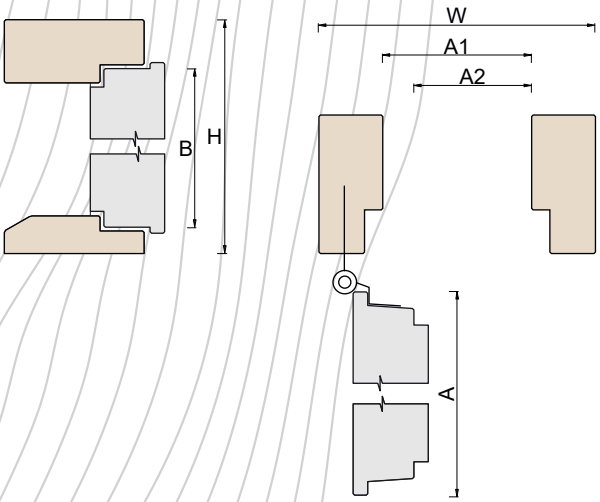

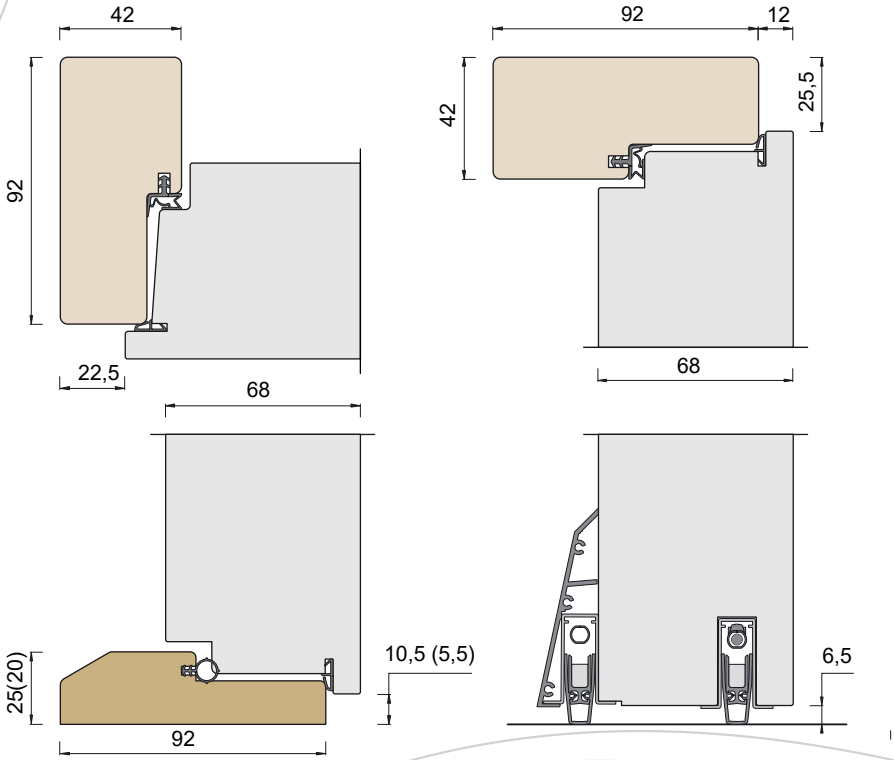



vau.ee

CF

FD30 ____ CF02

FD30-28dB ____ CF03

FD18 ____ CF04

FD18-Clima ____ CF05

FD09 ____ CF06

E02 ____ CF07

FD60 ____ CF08

FD60-38 ____ CF09

Sound- and fire-resistant doors

table of contents

VILJANDI windows · doors

VILJANDI windows · doors

FIRE RESISTANT DOOR FD30

CF02

FD30 is a wooden fire resistant door for use in heated work and living areas to close openings between fire compartments.

The temperature difference between the rooms to be separated must not exceed 5 ° C.

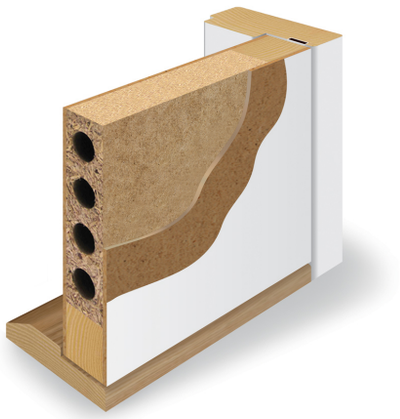

Fire resistant	$EI_2$30
Self-closing class	C0



TECHNICAL DATA



Size	M7-10 x M20-21
	can produce as adouble-sided
Door leaf	non-rebated, thickness 40mm
Frame	pine, depth 92mm
Threshold	oak, height 22mm
Locking system	lock case ASSA 565 and striking plate 2864-2
Hinges	plate hinges Abloy 3248
Finishing	white (S 0502-Y) or special color
Extras	door eye, doorbell, stainless steel kick plate, surface mounted door closer, veneer cover, glued decorative panels and or moldings, descending threshold

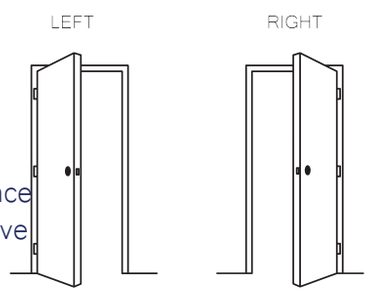

It is possible to get special solutions. More information from the representative.

vau.ee

20220324

CF02

VILJANDI windows · doors

FIRE RESISTANT DOOR FD30

	H	B	W	A	A1	A2
M7			690	625	606	564
M8			790	725	706	664
M9			890	825	806	764
M10			990	925	906	864
M20	1990	1940				
M21	2090	2040				

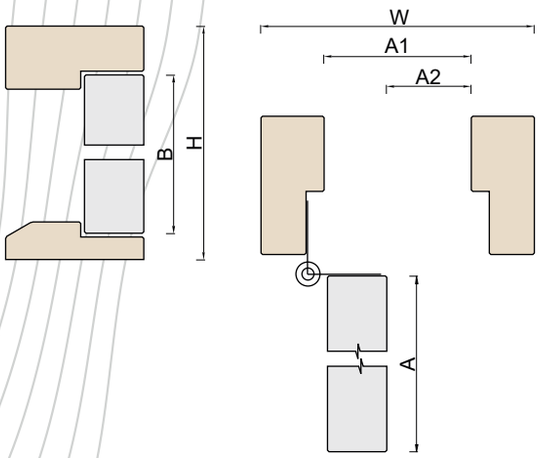

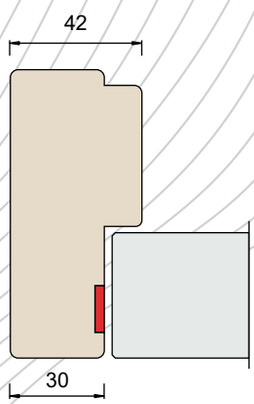

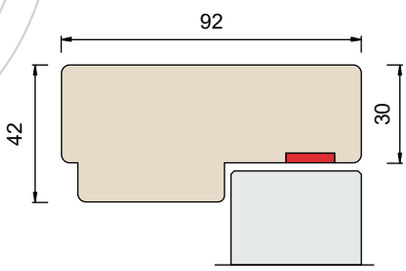

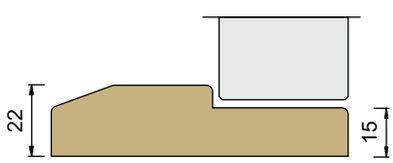







vau.ee

20220324

VILJANDI windows doors

FIRE-AND SOUND-RESISTANT DOOR FD30-28

CF03

FD30-28 is a wooden fire-and sound door for use in heated work and living areas to close openings between fire compartments.

The temperature difference between the rooms to be separated must not exceed 5 ° C.

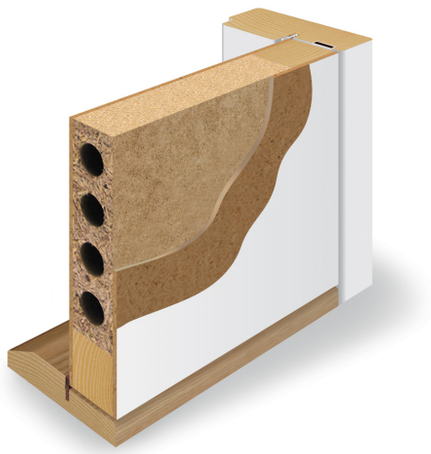

Fire resistant	$EI_2$30
Sound insulation	Rw 28dB
Self-closing class	C0



TECHNICAL DATA



Size	M7-10 x M20-21
Door leaf	non-rebated, thickness 40mm
Frame	pine, depth 92mm
Threshold	oak, height 22mm
Locking system	lock case ASSA 565 and striking plate 2864-2
Hinges	plate hinges Abloy 3248
Finishing	white (S 0502-Y) or special colour
Extras	door eye, doorbell, stainless steel kick plate, door closer, grooved patterns, veneer covering, glued decorative panels and / or moldings

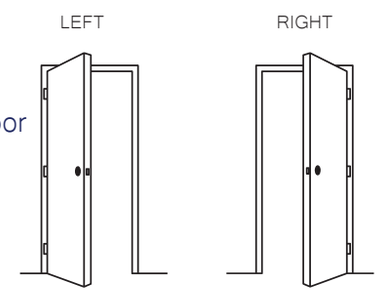

It is possible to get special solutions. More information from the representative.

vau.ee

CF03

VILJANDI windows · doors

FIRE-AND SOUND-RESISTANT DOOR FD30-28dB

	H	B	W	A	A1	A2
M7			690	625	606	564
M8			790	725	706	664
M9			890	825	806	764
M10			990	925	906	864
M20	1990	1940				
M21	2090	2040				

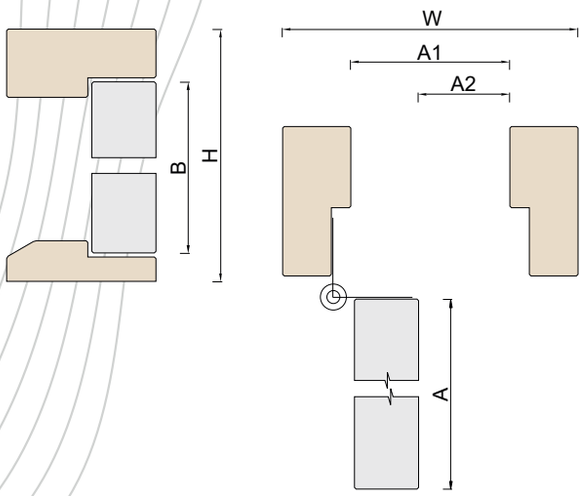

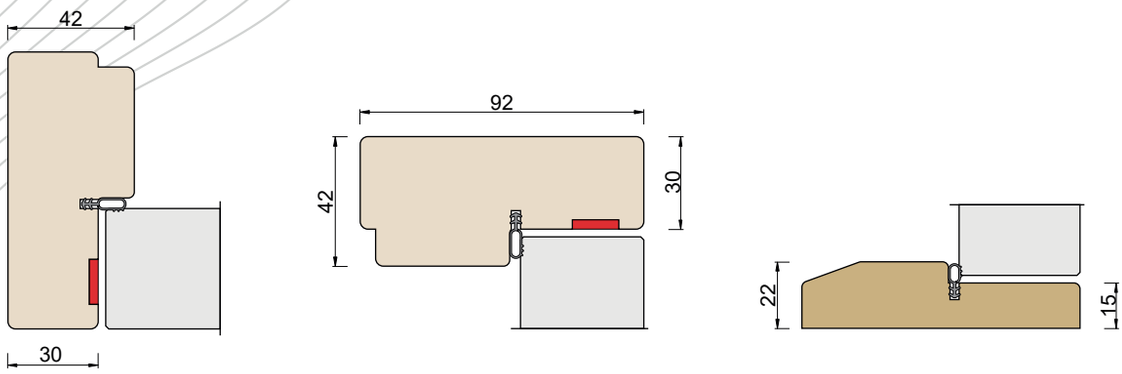

vau.ee

VILJANDI windows · doors

FIRE- AND SOUND-RESISTANT DOOR FD18

CF04

FD18 is a door for use in heated work and living areas to close openings between fire compartments.

The temperature difference between the rooms to be separated must not exceed 5 ° C.

Fire resistant	$EI_1 30$
Smoke control	Sa/S_{200}
Sound insulation	Rw 38-40dB
Self-closing class	C0-C5





TECHNICAL DATA

Size	one sided M7-10 x M20-21
	can be produced as a double-sided
Door leaf	non-rebated, thickness 54mm
Frame	pine, depth 92mm
Threshold	oak, height 25mm
Locking system	lock case ASSA 565 and striking plate LP712
Hinges	plate hinges Abloy 3248
Finishing	white (S 0502-Y) or special colour
Glass	clear fire glass
Extras	additional lock case, doorbell, door eye, surface mounted door closer, stainless steel kick plate, veneer cover, grooved patterns, glued decorative panels and/or moldings, descending thershold, postbox, glass insert



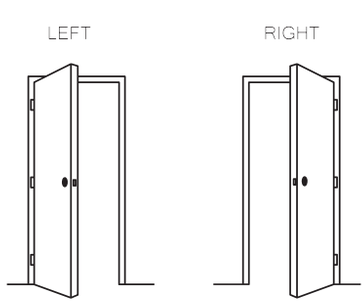

It is possible to get special solutions. More information from the representative.esindajalt.

vau.ee

CF04

VILJANDI windows · doors

FIRE- AND SOUND- RESISTANT DOOR FD18

	H	B	W	A	A1	A2
M7			690	625	606	550
M8			790	725	706	650
M9			890	825	806	750
M10			990	925	906	850
M20	1990	1940				
M21	2090	2040				

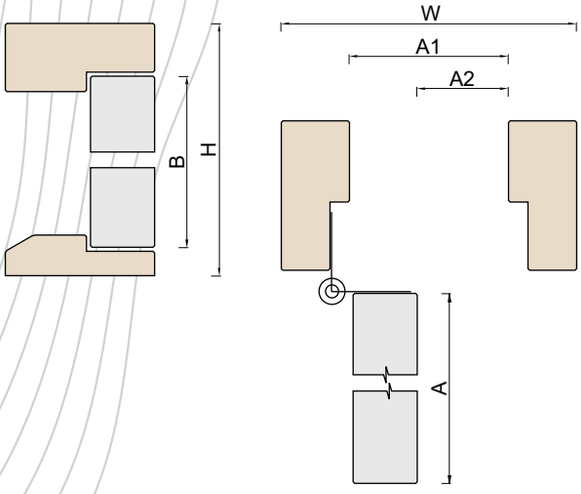















vau.ee

20220330

VILJANDI windows · doors

FIRE- AND SOUND RESISTANT DOOR FD18-CLIMA

CF05

FD18-Clima is a door for use in heated work and living areas to close openings between fire compartments.

The temperature difference between the rooms to be separated must not exceed 20°C.

Fire resistant	$EI_1 30$
Smoke control	Sa/S_{200}
Sound insulation	Rw 38-40dB
Self-closing cass	C0-C5

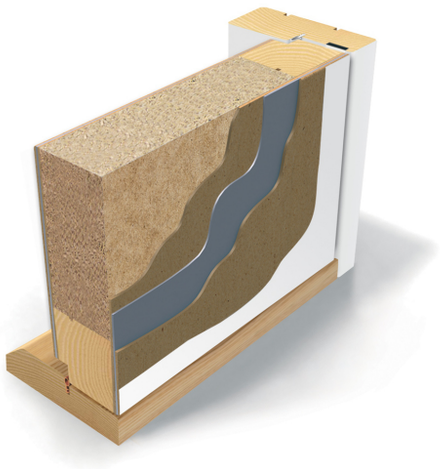



TECHNICAL DATA



Size	one sided M7-10 x M20-21
	can be produced as a double-sided
Door leaf	non-rebated, thickness 54mm
Frame	pine, depth 92mm
Threshold	oak, height 25mm
Locking system	lock case ASSA 565 and striking plate LP712
Hinges	plate hinges Abloy 3248
Finishing	white (S 0502-Y) or special colour
Glass	clear fire glass
Extras	additional lock case, doorbell, door eye, surface mounted door closer, stainless steel kick plate, veneer cover, grooved patterns, glued decorative panels and/or moldings, descending thershold, postbox, glass inserts

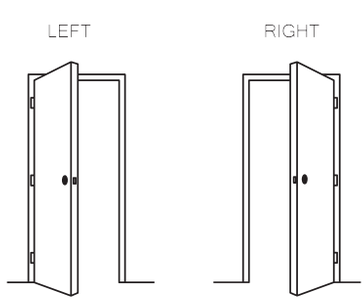

It is possible to get special solutions. More information from the representative.

vau.ee

CF05

VILJANDI windows · doors

FIRE- AND SOUND RESISTANT DOOR FD18-CLIMA

	H	B	W	A	A1	A2
M7			690	625	606	550
M8			790	725	706	650
M9			890	825	806	750
M10			990	925	906	850
M20	1990	1940				
M21	2090	2040				

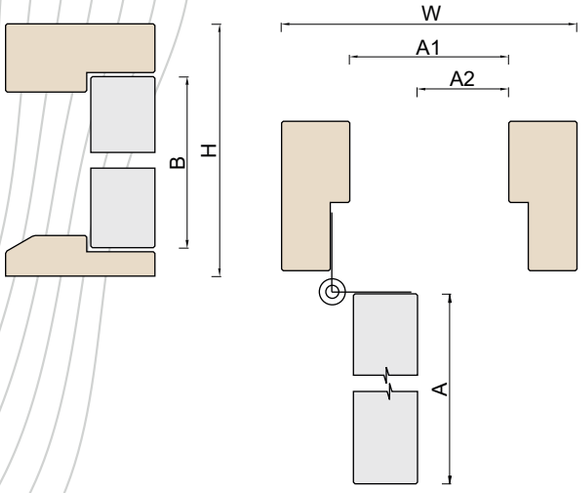















vau.ee

VILJANDI windows · doors

FIRE- AND SOUND RESISTANT DOOR FD09

CF06

The FD09 door is for use in heated work and living quarters to close openings between fire compartments.

The temperature difference between the rooms to be separated must not exceed 5 ° C.

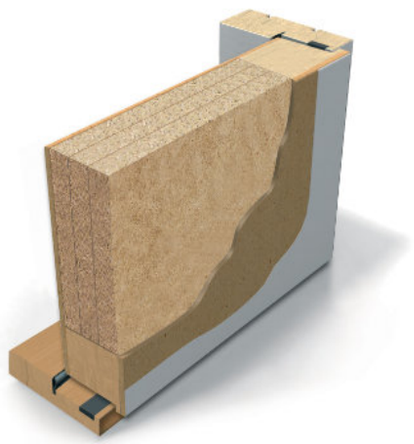

Fire resistant	$EI_1 30$
Smoke control	Sa/S_{200}
Sound insulation	Rw 37-39dB
Self-closing class	C0-C5



TECHNICAL DATA



Size	M7-10 x M20-21
	can be produced as a double-sided
Door leaf	rebated, thickness 52mm
Frame	pine, depth 92mm
Threshold	oak, height 25mm
Locking system	lock case ASSA 565 and striking plate LP732
Hinges	plate hinges NTR 110-30
Finishing	white (S 0502-Y) or special color
Glass	clear fire glass
Extras	stainless steel kick plate, surface mounted door closer, door eye, doorbell, veneer cover, glued decorative shields and/or moldings, grooved patterns, descending threshold, postbox, additional lock case

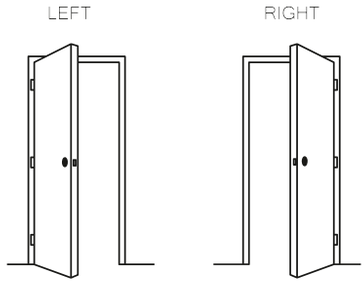

It is possible to get special solutions. More information from the representative.

vau.ee

20230427

CF06

VILJANDI windows · doors

FIRE- AND SOUND RESISTANT DOOR FD09

	H	B	W	A	A1	A2
M7			690	645	606	577
M8			790	745	706	677
M9			890	845	806	777
M10			990	945	906	877
M20	1990	1954				
M21	2090	2054				



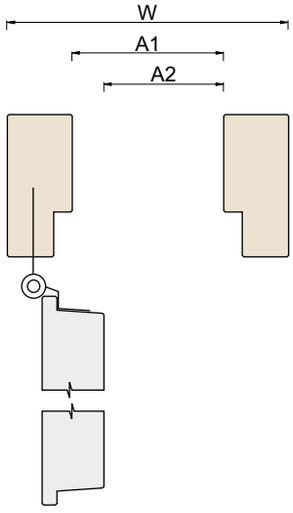

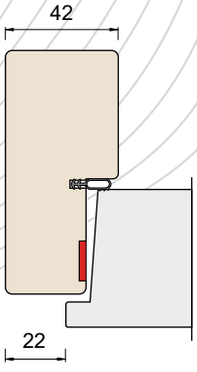

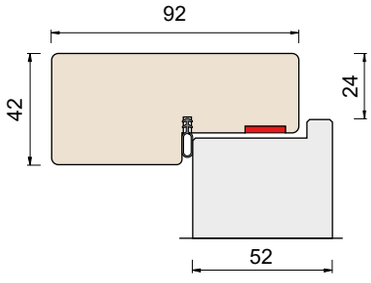



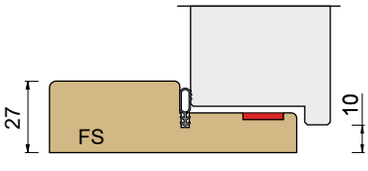

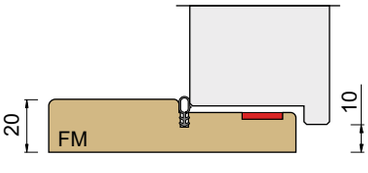

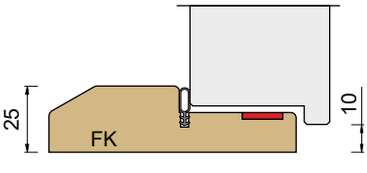



vau.ee

20230427

VILJANDI windows · doors

FIRE- AND SOUND RESISTANT DOOR E02

CF07

The E02 door is for use in heated work and living quarters to close openings between fire compartments.

The temperature difference between the rooms to be separated must not exceed 5 ° C.



Fire resistant	$EI_1 30$
Smoke control	Sa/S_{200}
Sound insulation	Rw 44dB
Self-closing class	C0-C5





TECHNICAL DATA

Size	M7-10 x M20-21
Door leaf	rebated, thickness 63mm
Frame	pine, depth 92mm
Threshold	oak, height 25mm
Locking system	lock case ASSA 565 and striking plate LP732
Hinges	plate hinges Abloy NTR 110-30
Finishing	white (S 0502-Y) or special color
Extras	stainless steel kick plate, surface mounted door closer, door eye, veneer cover, glued decorative panels and/or moldings, descending threshold, additional lock case

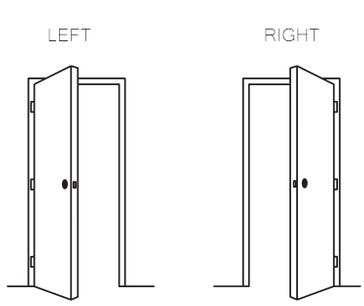

It is possible to get special solutions. More information from the representative.

vau.ee

CF07

VILJANDI windows · doors

FIRE- AND SOUND RESISTANT DOOR E02

	H	B	W	A	A1	A2
M7			690	645	606	568
M8			790	745	706	668
M9			890	845	806	768
M10			990	945	906	868
M20	1990	1954				
M21	2090	2054				

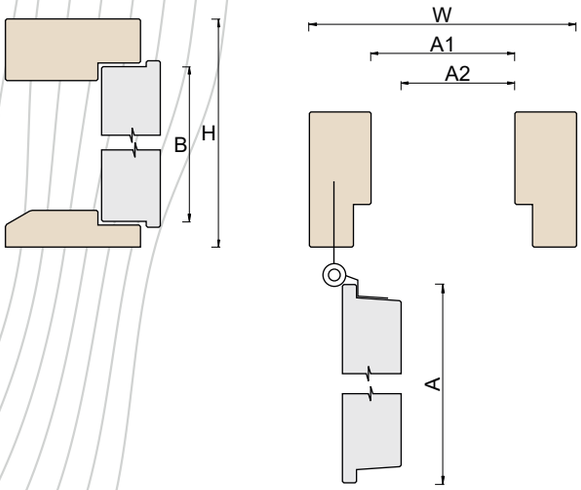

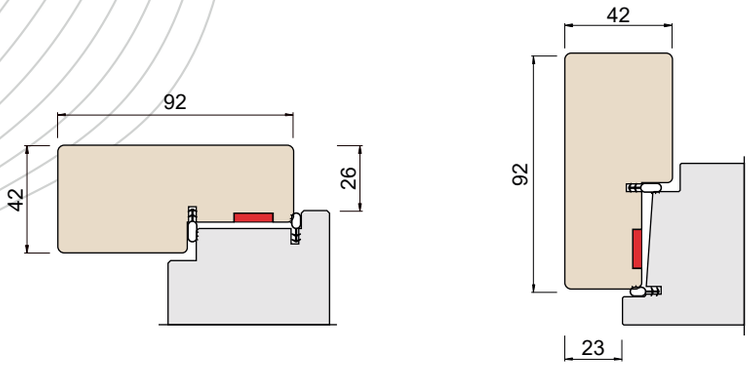

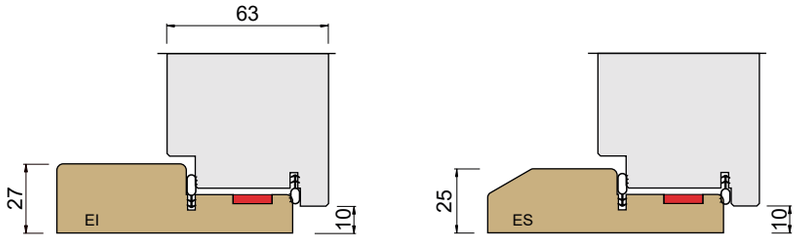

vau.ee

VILJANDI windows · doors

FIRE RESISTANT DOOR FD60

CF08

FD60 door is for use in heated work and living quarters to close openings between fire compartments.

The temperature difference between the rooms to be separated must not exceed 5 ° C.

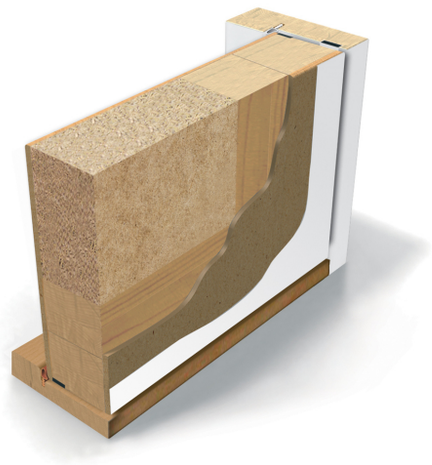

Fire resistant	$EI_1 60$
Smoke control	Sa/S_{200}
Sound insulation	Rw 31dB
Self-closing class	C0-C5





TECHNICAL DATA

Size	M7-10 x M20-21
Door leaf	non-rebated, thickness 54mm
Frame	pine, 92mm depth
Threshold	oak, 25mm height
Locking system	lock case ASSA 565 and striking plate 1887-2
Hinges	plate hinges Abloy 3248
Finishing	white (S 0502-Y) or special color
Extras	stainless steel kick plate, doorbell, surface mounted door closer, veneer cover, glued decorative panels and/or moldings, additional lock

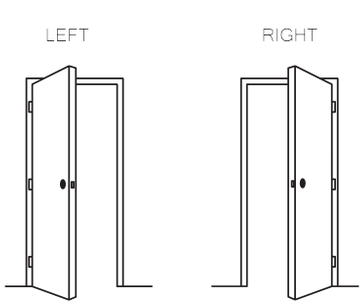

It is possible to get special solutions. More information from the representative.

vau.ee

CF08

VILJANDI windows · doors

FIRE RESISTANT DOOR FD60

	H	B	W	A	A1	A2
M7			690	625	606	550
M8			790	725	706	650
M9			890	825	806	750
M10			990	925	906	850
M20	1990	1940				
M21	2090	2040				

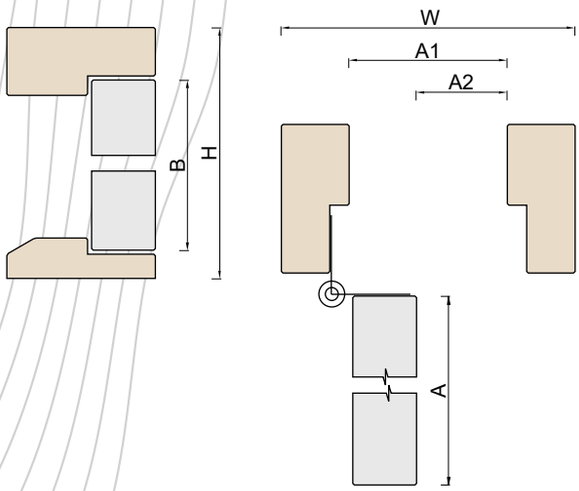

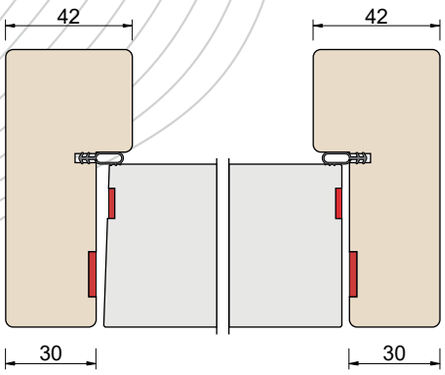

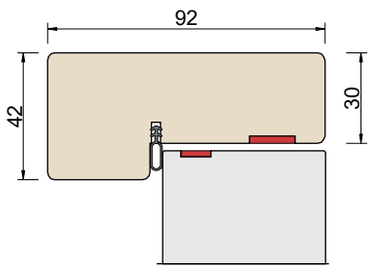

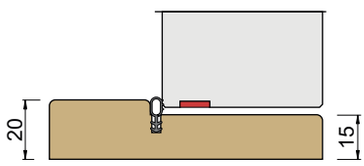

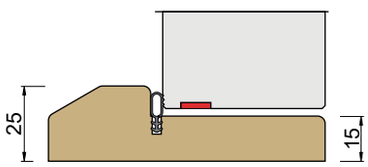

VILJANDI windows · doors

FIRE RESISTANT DOOR FD60-38

CF09

FD60-38 door is for use in heated work and living quarters to close openings between fire compartments.

The temperature difference between the rooms to be separated must not exceed 5 ° C.



Fire resistant	$EI_1 60$
Smoke control	Sa/S_{200}
Sound insulation	Rw 38dB
Self-closing class	C0-C5



TECHNICAL DATA



Size	M7-10 x M20-21
Door leaf	non-rebated, thickness 67mm
Frame	pine, depth 92mm
Threshold	oak, height 25mm
Locking system	lock case ASSA 565 and striking plate 0094
Hinges	plate hinges Abloy 3248
Finishing	white (S 0502-Y) or special color
Extras	door closer, door eye, veneer cover, glued decorative panels and / or moldings, cable

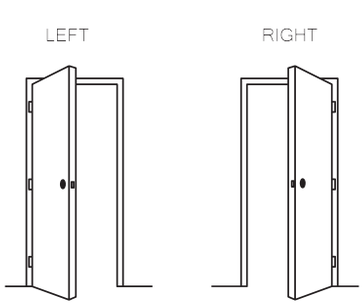

It is possible to get special solutions. More information from the representative.

vau.ee

20220324

CF09

VILJANDI windows · doors

FIRE RESISTANT DOOR FD60-38

	H	B	W	A	A1	A2
M7			690	625	606	537
M8			790	725	706	637
M9			890	825	806	737
M10			990	925	906	837
M20	1990	1940				
M21	2090	2040				

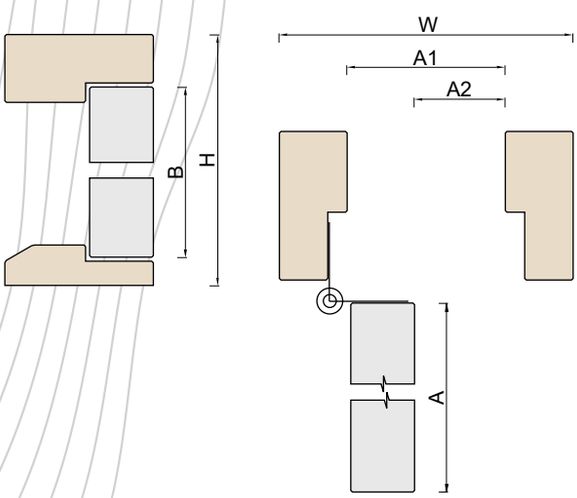

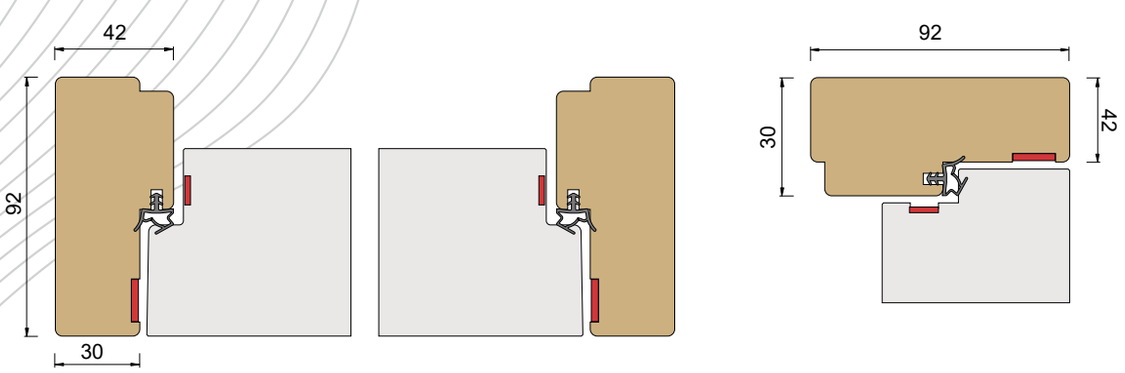

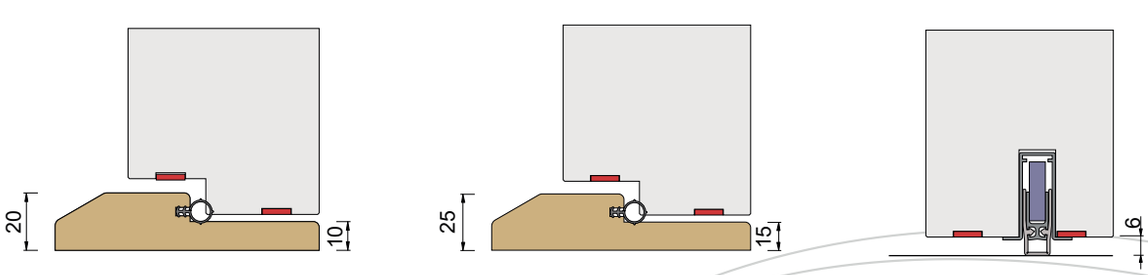

vau.ee

CG

FD18, RC2 ____ **CG01**

FD18-Clima RC2 ____ **CG02**

FD18-Sound RC2 ____ **CG03**

FD60, RC3 ____ **CG04**

Doors with security class

table of contents

VILJANDI
windows · doors

VILJANDI windows · doors

FIRE- AND SOUND RESISTANT DOOR FD18 RC2

CG01

FD18 RC2 is a certified burglar-proof interior door for use in heated work and living areas to close openings between fire compartments.

The temperature difference between the rooms to be separated must not exceed 5 ° C.



Fire resistant	$EI_1 30$
Smoke control	Sa/S_{200}
Sound insulation	Rw 38-40dB
Self-closing class	C0-C5
Burglary resistant	Rc2



TECHNICAL DATA



Size	one-sided M7-10 x M20-21
Door leaf	non-rebaled, thickness 54mm
Frame	pine, depth 92mm
Threshold	oak, height 25mm
Locking system	lock case with ASSA 410 or ASSA 2002 security plates 4292. Striking plate 1487-2HD (metal security plate on the back of the frame).
Hinges	plate hinges Abloy 3248 (metal safety plate on the back of the frame)
Finishing	white (S 0502-Y) or special color
Extras	additional lock, doorbell, door eye, door closer, stainless steel kick plate, veneer cover, grooved patterns, glued decorative panels and / or moldings

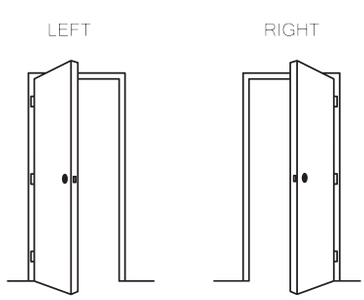

It is possible to get special solutions. More information from the representative.

vau.ee

CG01

VILJANDI windows · doors

FIRE- AND SOUND RESISTANT DOOR FD18 RC2

	H	B	W	A	A1	A2
M7			690	625	606	550
M8			790	725	706	650
M9			890	825	806	750
M10			990	925	906	850
M20	1990	1940				
M21	2090	2040				

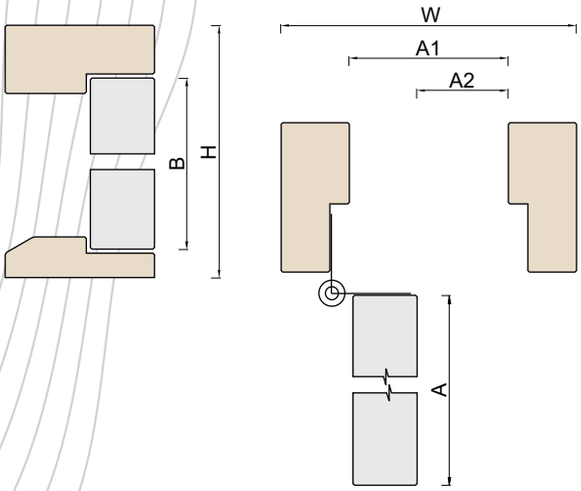













vau.ee

20220330

VILJANDI windows · doors

FIRE RESISTANT DOOR FD18-CLIMA RC2

CG02

FD18-Clima RC2 is a certified burglar-proof interior door for use in heated work and living areas to close openings between fire compartments.

The temperature difference between the rooms to be separated must not exceed 20 ° C.

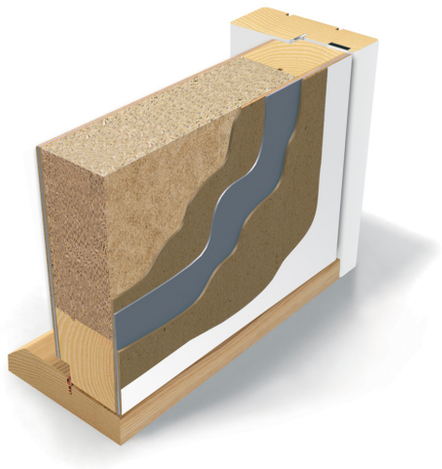

Fire resistant	$EI_1 30$
Smoke control	Sa/S_{200}
Sound insulation	Rw 38-40dB
Self-closing class	C0-C5
Burglary resistant	Rc2



TECHNICAL DATA



Size	one-sided M7-10 x M20-21
Door leaf	non-rebaled, thickness 54mm
Frame	pine, depth 92mm
Threshold	oak, height 25mm
Locking system	lock case with ASSA 410 or ASSA 2002 security plates 4292. Striking plate 1487-2HD (metal security plate on the back of the frame)
Hinges	plate hinges Abloy 3248 (metal security plate on the back of the frame)
Finishing	white (S 0502-Y) or special color
Extras	additional lock, doorbell, door eye, door closer, stainless steel kick plate, veneer cover, grooved pattern, glued decorative panels and/or moldings

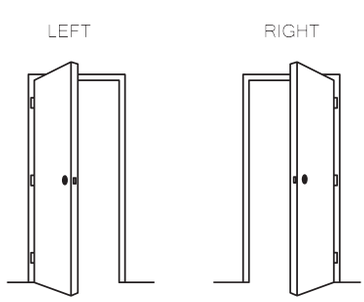

It is possible to get special solutions. More information from the representative.

vau.ee

CG02

VILJANDI windows · doors

FIRE RESISTANT DOOR FD18-CLIMA RC2

	H	B	W	A	A1	A2
M7			690	625	606	550
M8			790	725	706	650
M9			890	825	806	750
M10			990	925	906	850
M20	1990	1940				
M21	2090	2040				

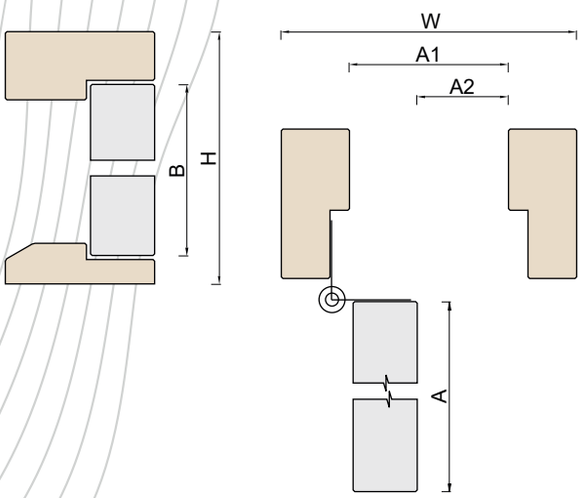





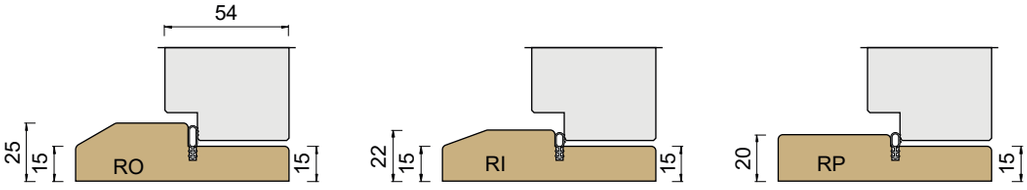

vau.ee

20220330

VILJANDI windows · doors

SOUND RESISTANT DOOR FD18-SOUND RC2

CG03

FD18-Sound RC2 is a certified burglar-proof interior door for use in heated work and living areas to close openings between fire compartments.

The temperature difference between the rooms to be separated must not exceed 5 ° C.

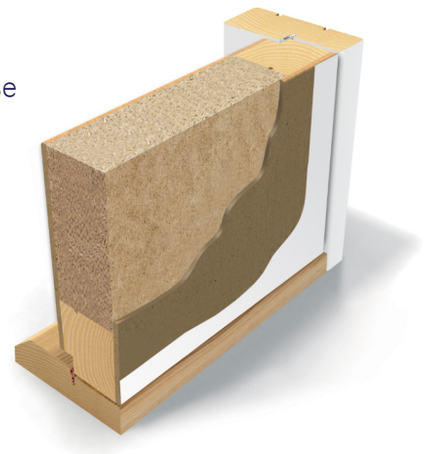

Sound insulation	Rw 38-40dB
Burglary resistant	Rc2

TECHNICAL DATA

Size	M7-10 x M20-21
Door leaf	non-rebated, thickness 54mm
Frame	pine, depth 92mm
Threshold	oak, height 25mm
Locking case	lock case with ASSA 410 or ASSA 2002 security plates 4292. Striking plate 1487-2HD (metal security plate on the back of the frame)
Hinges	plate hinges Abloy 3248 (metal security plate on the back of the frame)
Finishing	white (S 0502-Y) or special color
Extras	additional lock, doorbell, door eye, door closer, stainless steel kick plate, veneer cover, grooved pattern, glued decorative panels and / or moldings



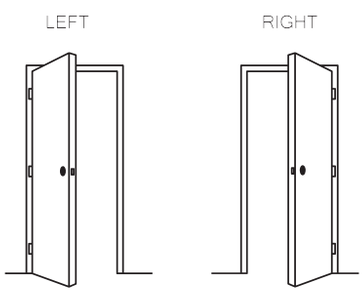

It is possible to get special solutions. More information from the representative.

vau.ee

CG03

VILJANDI windows · doors

SOUND RESISTANT DOOR FD18-SOUND RC2

	H	B	W	A	A1	A2
M7			690	625	606	550
M8			790	725	706	650
M9			890	825	806	750
M10			990	925	906	850
M20	1990	1940				
M21	2090	2040				

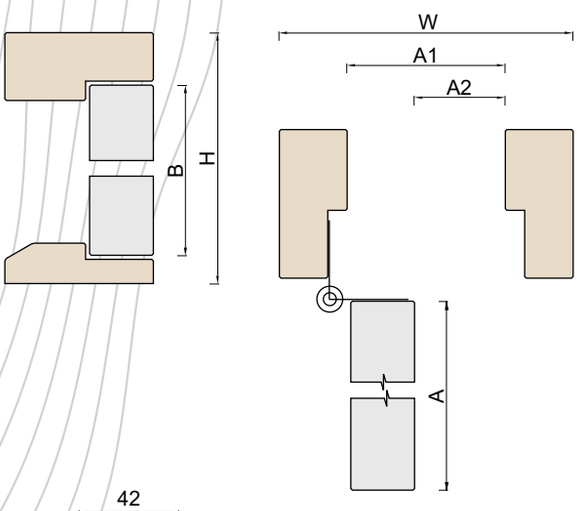

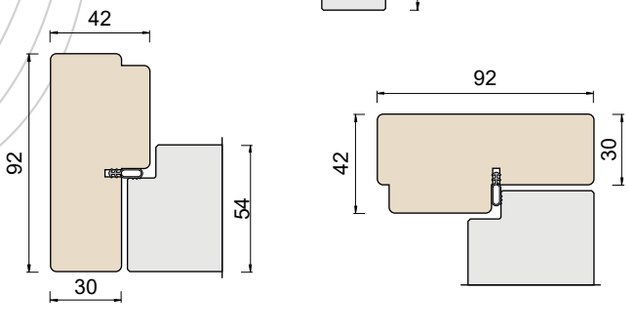

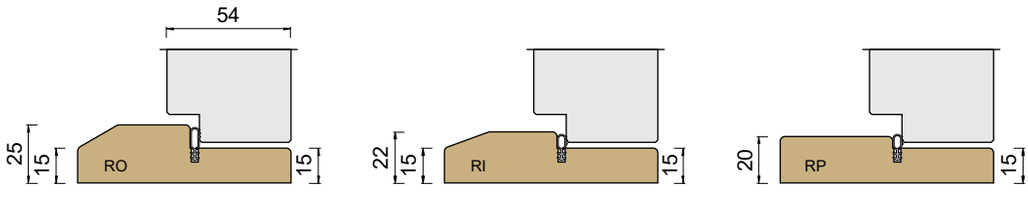



vau.ee

20220330

VILJANDI windows · doors

FIRE RESISTANT DOOR FD60 RC3

CG04

FD60 RC3 is a certified burglar-proof interior door for use in heated work and living areas to close openings between fire compartments.

The temperature difference between the rooms to be separated must not exceed 5 ° C



Fire resistant	$EI_1 60$
Smoke control	Sa/S_{200}
Sound insulation	Rw 31dB
Self-closing class	C0-C5
Burglar resistance	RC3



TECHNICAL DATA



Size	M7-10 x M20-21
Door leaf	non-rebaled, thickness 54mm
Frame	pine, depth 92mm
Threshold	oak, height 25mm
Locking system	lock case ASSA 510 (+safety cover ASSA 4292). Strking plate LP713 or ASSA 1487 (+security plate)
Hinges	plate hinges Abloy 3288 or ASSA 3225 (+security plate)
Finishing	white (S 0502-Y)or special color
Extras	additional lock Assa 411, doorbell, door closer, stainless steel kick plate, veneer cover, cable, glued decorative panels and / or moldings

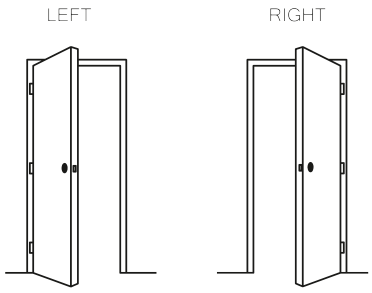

It is possible to get special solutions. More information from the representative.

vau.ee

CG04

VILJANDI windows · doors

FIRE RESISTANT DOOR FD60-RC3

	H	B	W	A	A1	A2
M7			700	625	606	550
M8			800	725	706	650
M9			900	825	806	750
M10			1000	925	906	850
M20	1990	1940				
M21	2090	2040				

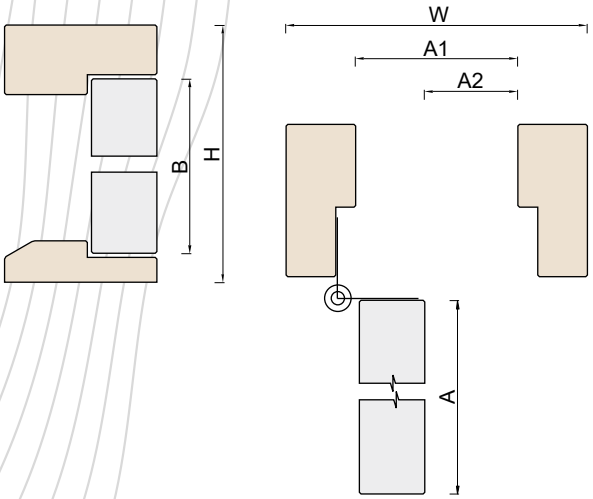

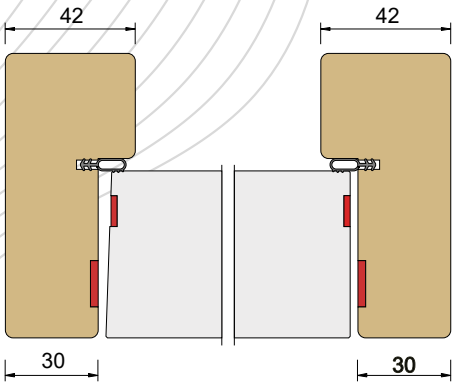

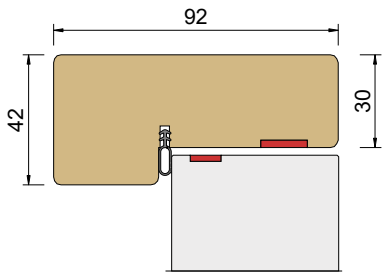

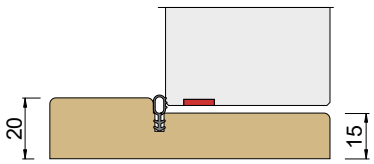

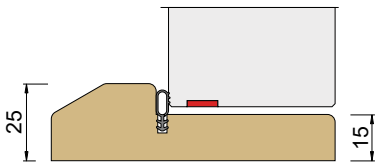

vau.ee

CH

FF01 _____ **CH01**

FF02 _____ **CH02**

IF01 _____ **CH03**

IF02 _____ **CH04**

IF03 _____ **CH05**

Sidelights

table of contents

VILJANDI windows • doors

VILJANDI windows · doors

FIRE RESISTANT SIDELIGHT FF01

CH01

Glass fire resistant partition with glazing bar, suitable for use in heated work and living rooms. A fire door corresponding to the same fire resistance class may be installed next to the glass wall.

Not suitable for outdoor use and between rooms with different air temperatures. The temperature difference between the rooms to be separated must not exceed 5°C.



Fire resistant	EI30
Sound insulation	Rw 38dB(glass)



TECHNICAL DATA



Size	M3-5 x M20-21
Frame	pine, depth 92mm
Finishing	white (S 0502-Y) or special colour
Glass	fire resistant glass Fireswiss Foam 30-15, thickness 15mm
Glazing bar	wood
Extras	vertical and horizontal bars, impost, stained

It is possible to get special solutions. More information from the representative.

CH01

VILJANDI windows · doors

FIRE RESISTANT SIDELIGHT FF01

	H_1	H_2	W_1	W_2
M3			290	206
M4			390	306
M5			490	406
M20	1990	1906		
M21	2090	2006		

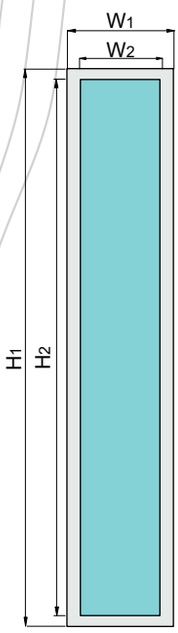











vau.ee

20211029

VILJANDI windows · doors

FIRE RESISTANT SIDELIGHT FF02

CH02

Glass fire resistant partition with glazing bar, suitable for use in heated work and living rooms. A fire door corresponding to the same fire resistance class may be installed next to the glass wall.

Not suitable for outdoor use and between rooms with different air temperatures. The temperature difference between the rooms to be separated must not exceed 5°C.



Fire resistant	EI30
Sound insulation	Rw 38dB(glass)





TECHNICAL DATA

Size	M3-5 x M20-21
Frame	pine, depth 92mm
Finishing	white (S 0502-Y) or special colour
Glass	fire protection glass Fireswiss Foam 30-15, thickness 15mm
Glazing bar	wood
Extras	vertical and horizontal bars, impost, stained

It is possible to get special solutions. More information from the representative.

CH02

VILJANDI windows · doors

FIRE RESISTANT SIDELIGHT FF02

	H_1	H_2	W_1	W_2
M3			290	206
M4			390	306
M5			490	406
M20	1990	1906		
M21	2090	2006		

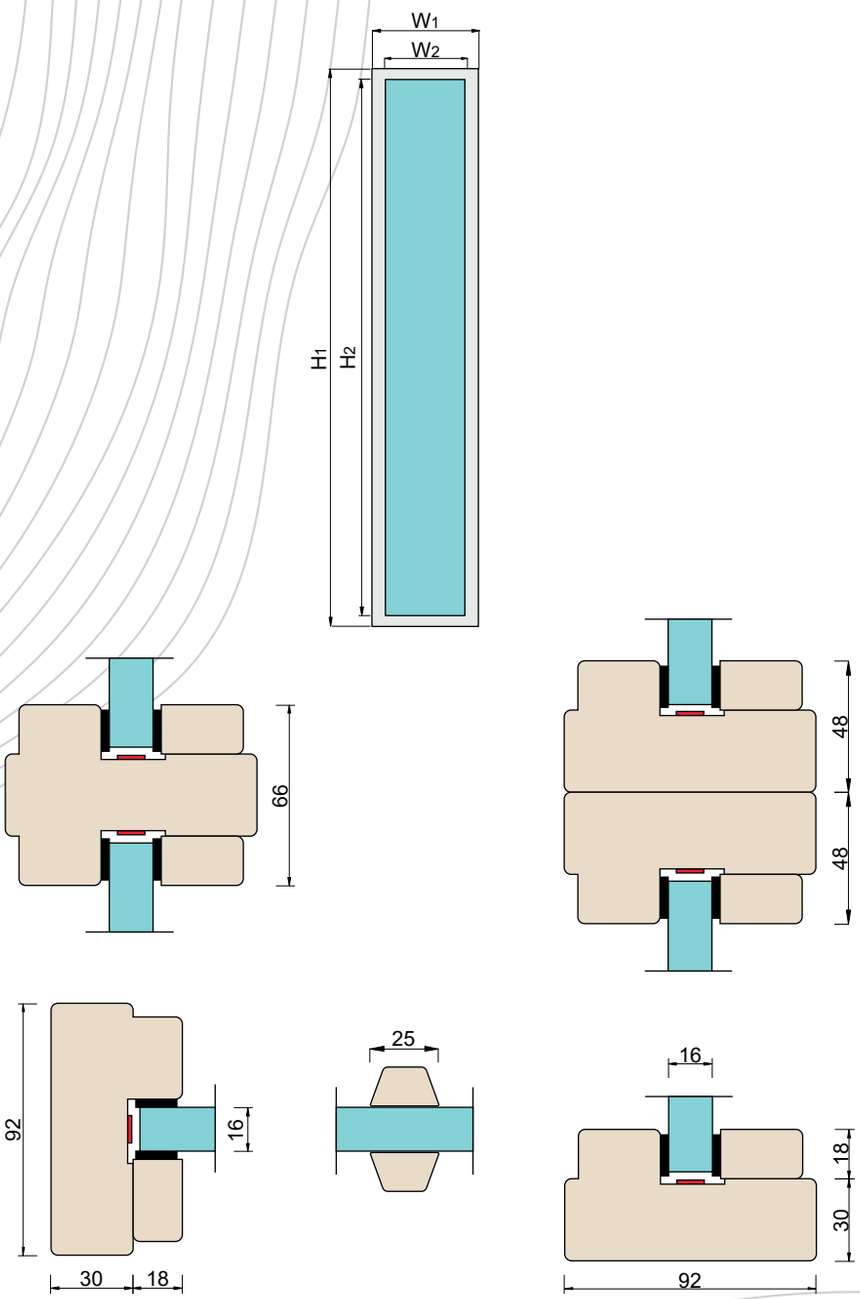

vau.ee

VILJANDI windows · doors

INTERNAL DOOR SIDELIGHT IF01

CH03

Wooden framed fixed sidelight with glazing bar.

Not suitable for outdoor use and between rooms with different air temperatures.





TECHNICAL DATA

Size	M3-5 x M20-21
Frame	pine, depth 92mm
Finishing	white (S 0502-Y) or special color
Glass	4-8.8mm, clear, diamante, cotzwold or satinovo
Glazing bar	wood
Extras	vertical and horizontal bars, impost, stained

It is possible to get special solutions. More information from the representative.

CH03

VILJANDI windows · doors

INTERNAL DOOR SIDELIGHT IF01

	H_1	H_2	W_1	W_2
M3			290	206
M4			390	306
M5			490	406
M20	1990	1906		
M21	2090	2006		

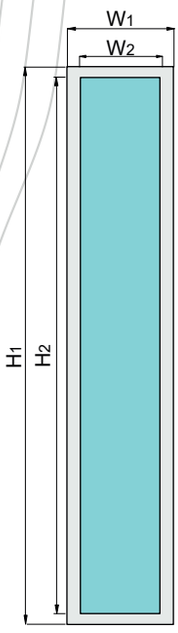



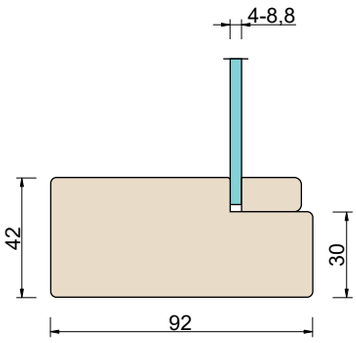

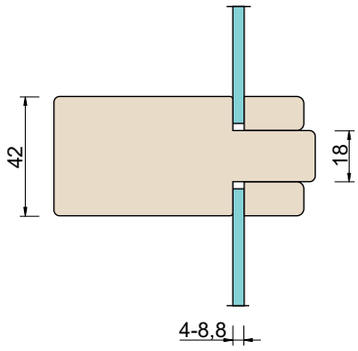

vau.ee

20211029

VILJANDI windows · doors

INTERNAL DOOR SIDELIGHT IF02

CH04

Wooden framed fixed sidelight without glazing bar.

Not suitable for outdoor use and between rooms with different air temperatures





TECHNICAL DATA

Size	M3-5 x M20-21
Frame	pine, depth 92mm
Finishing	white (S 0502-Y) or special color
Glass	4-9,6mm, clear, diamante, cotzwold or satinovo
Glazing bar	none
Extras	vertical and horizontal bars, impost, stained, veneer cover

It is possible to get special solutions. More information from the representative.

CH04

VILJANDI windows · doors

INTERNAL DOOR SIDELIGHT IF02

	H_1	H_2	W_1	W_2
M3			290	206
M4			390	306
M5			490	406
M20	1990	1906		
M21	2090	2006		

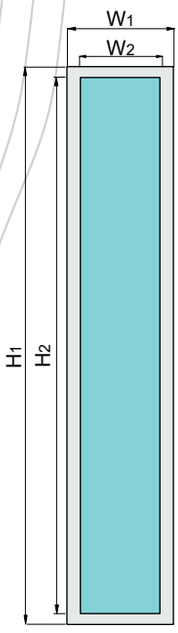

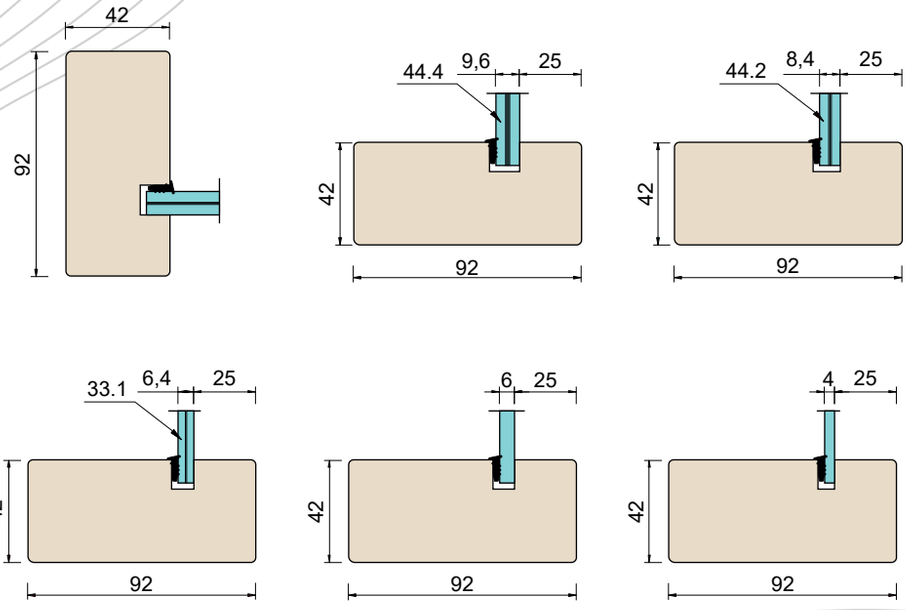

vau.ee

20211029

VILJANDI windows · doors

INTERNAL DOOR SIDELIGHT IF03

CH05



Wooden framed fixed sidelight with glazing bar.

Not suitable for outdoor use and between rooms with different air temperatures.



TECHNICAL DATA

Size	M3-5 x M20-21
Frame	pine, depth 92mm
Finishing	white (S 0502-Y) or special color
Glass	9-15mm, laminated or clear
Glaazing bar	wood
Extras	vertical and horizontal bars, impost, stained, veneer cover

It is possible to get special solutions. More information from the representative.

vau.ee

CH05

VILJANDI windows · doors

INTERNAL DOOR SIDELIGHT IF03

	H_1	H_2	W_1	W_2
M3			290	206
M4			390	306
M5			490	406
M20	1990	1906		
M21	2090	2006		

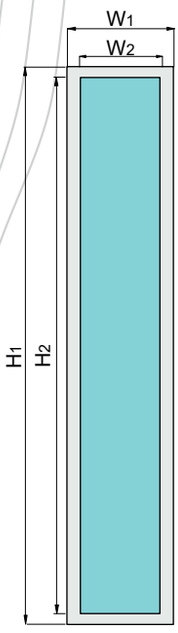

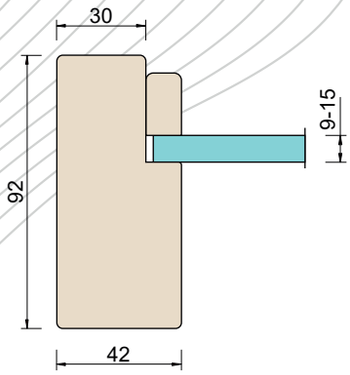

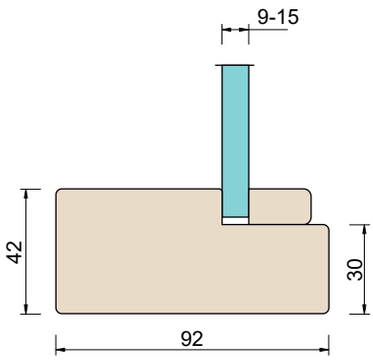

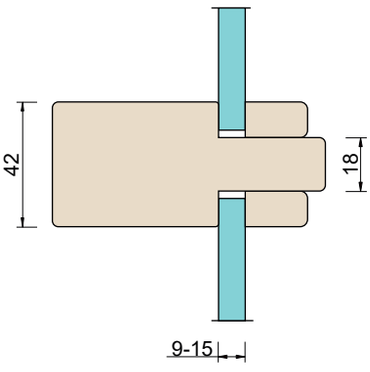

Sauna door CI01

Sauna doors

table of contents

VILJANDI
windows · doors

VILJANDI windows · doors

SAUNA DOOR

C101

The full glass sauna door is primarily intended for use as a steam room door or in other interiors (except steam saunas).





TECHNICAL DATA

Size	one sided M7-10 x M19-21
Door leaf	tempered glass, thickness 8mm
Frame	unfinished finger-jointed pine wood, depth 92mm
Locking system	roller lock 4238 and wooden round handle
Hinge	glassdoor hinge
Glass	8mm bronze, satinovo, gray, clear

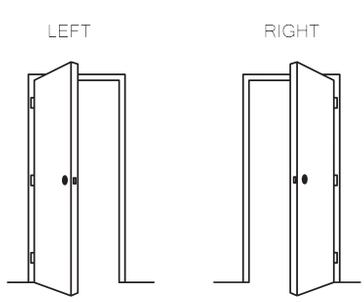

It is possible to get special solutions. More information from the representative.

vau.ee

20211022

C101

VILJANDI windows · doors

SAUNA DOOR

	H	B	W	A	A1	A2
M7			690	620	606	603
M8			790	720	706	703
M9			890	820	806	803
M20	1990	1840				
M21	2090	1940				

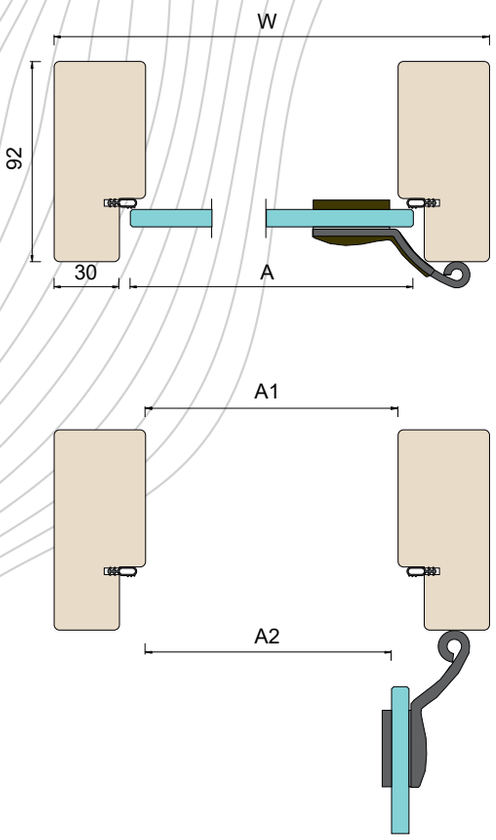

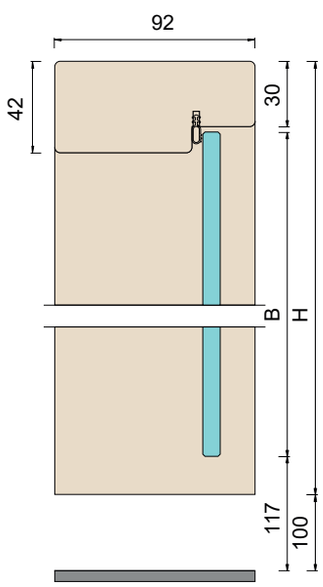

vau.ee

CJ

Rebated internal doors glass designs _____**CJ01**

Non-rebated internal doors glass designs ___**CJ02**

Internal door glass opening designs

table of contents

VILJANDI windows • doors

VILJANDI windows · doors

REBATED INTERNAL DOORS GLASS DESIGNS

CJ01



Flush 1R

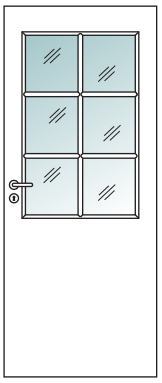

Flush 6R



Flush 1RK



Flush 6RK



Flush 1RS



Flush 10R

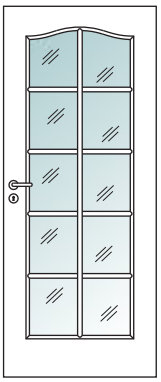

Flush 10RK

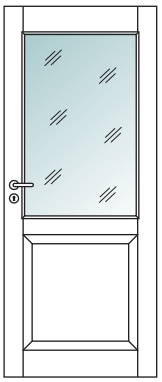

Caspian 1R



Caspian 6R

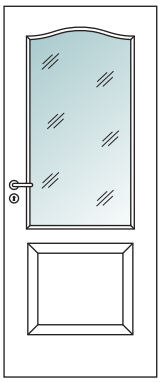

Cremona 1RK

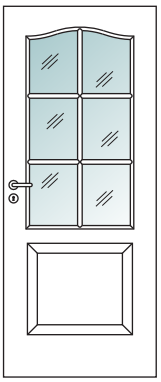

Cremona 6RK

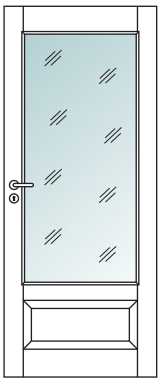

Jari 1R



Jari 8R

VILJANDI windows · doors

NON-REBATED INTERNAL DOORS GLASS DESIGNS

CJ02

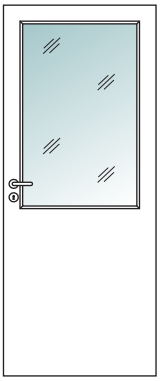

Flush 1R



Flush 6R



Flush 1RK



Flush 6RK



Flush 1RS



Flush 10R



Flush 10RK

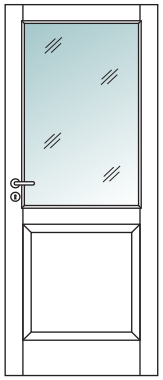

Stefan 1R

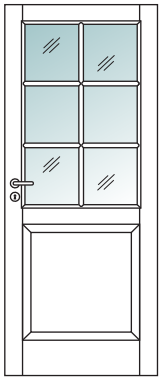

Stefan 6R



Harald 1RK



Harald 6RK



Flush G01



Flush G21



Flush G03



Flush GF03



Christian 1R



Christian 8R



Christian 10R

20230428

CJ02

VILJANDI windows · doors

NON-REBATED INTERNAL DOORS GLASS DESIGNS



Dannebrog
9R



Dannebrog
9RS



Magnus
1R



Flush G25

20230428



D

INTERNAL DOOR FRAMES

table of contents

VILJANDI
windows · doors

DA

Door frame SU290 _____ **DA01**

Door frame with sealing SU320D _____ **DA02**

Door frames for rebated doors

table of contents

VILJANDI windows • doors

VILJANDI windows · doors

DOOR FRAME SU290

DA01

Interior door frame for rebated door.



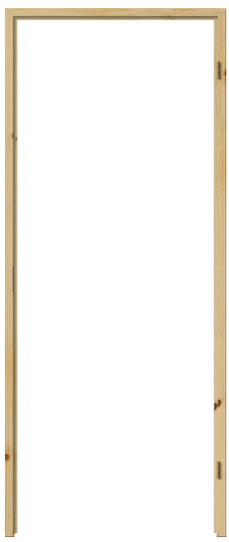

TECHNICAL DATA

Size	one sided M7-10 x M20-21 extended M13,4 x M20-21 double sided M13,4;15,4;17,4;19,4 x M20-21
Frame	pine, depth 92mm
Locking system	striking plate 0068
Hinge	FT-65
Finishing	white (S 0502-Y), special colour or unfinished
Mounting holes	Ø16/5, frame caps included
Extras	different widths, Norwegian groove, threshold, veneer covering

It is possible to get special solutions. More information from the representative.

VILJANDI
windows · doors

DOOR FRAME SU290

DA01

	H	B	W	A
M7			690	643
M8			790	743
M9			890	843
M10			990	943
M20	1990	1948		
M21	2090	2048		

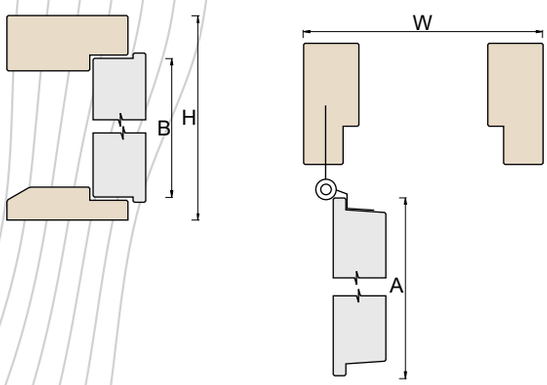

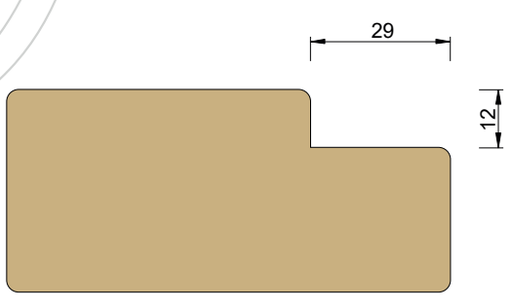

vau.ee

VILJANDI windows · doors

DOOR FRAME SU320D

DA02

Interior door frame with sealing for rebated door.



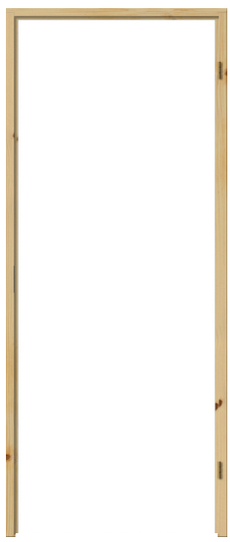

TECHNICAL DATA

Size	one sided M7-10 x M20-21 extended M13,4 x M20-21 double sided M13,4;15,4;17,4;19,4 x M20-21
Frame	pine, depth 92mm
Locking system	striking plate 0068
Hinge	FT-65
Finishing	white (S 0502-Y), special colour or unfinished
Mounting holes	Ø16/5, frame caps included
Extras	different widths, Norwegian groove, threshold, veneer covering

It is possible to get special solutions. More information from the representative.

VILJANDI
windows · doors

DOOR FRAME SU320D

DA02

	H	B	W	A
M7			690	643
M8			790	743
M9			890	843
M10			990	943
M20	1990	1948		
M21	2090	2048		

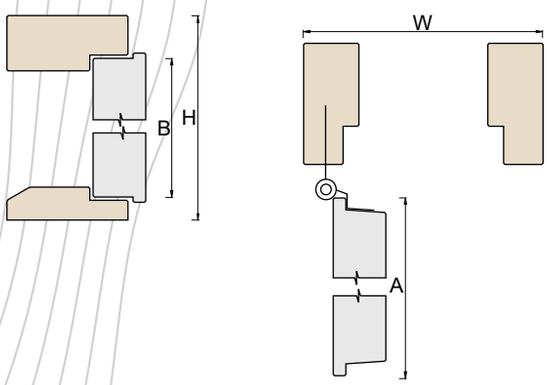

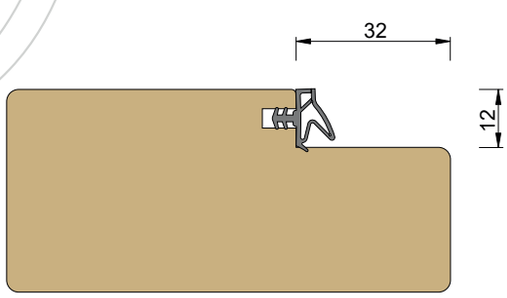

vau.ee

DB

Door frame RU420 _____ **DB01**

Door frame with sealing RU450D _____ **DB02**

Door frames for non-rebated doors

table of contents

VILJANDI windows · doors

VILJANDI
windows · doors

DOOR FRAME RU420

DB01

Interior door frame for non-rebated door.



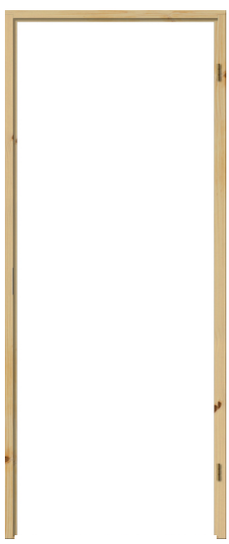

TECHNICAL DATA

Size	one sided	M7-M10 x M20-M21
	extended	M13;13,3;14 x M20-21
	double sided	M13,3;15,3;17,3;19,3 x M20-21
Frame	pine, depth 92mm	
Locking system	striking plate 0033	
Hinge	6540	
Finishing	white (S 0502-Y), special colour or unfinished	
Mounting holes	Ø16/5, frame caps included	
Extras	different widths, Norwegian groove, threshold, veneer covering	

It is possible to get special solutions. More information from the representative.

VILJANDI
windows · doors

DOOR FRAME RU420

DB01

	H	B	W	A
M7			690	625
M8			790	725
M9			890	825
M10			990	925
M20	1990	1940		
M21	2090	2040		

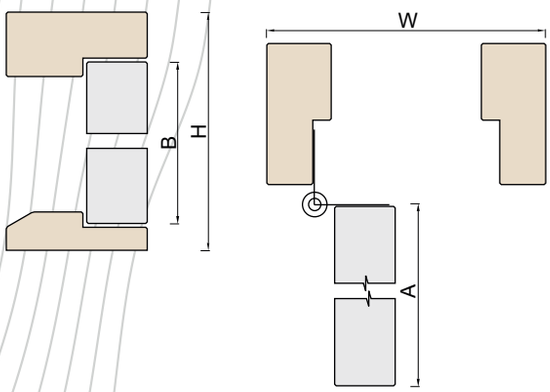

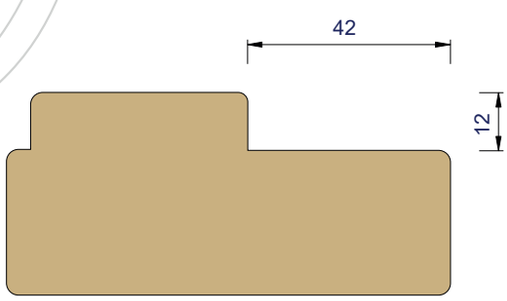

vau.ee

VILJANDI windows · doors

DOOR FRAME RU450D

DB02

Intenor door frame for non-rebated door.



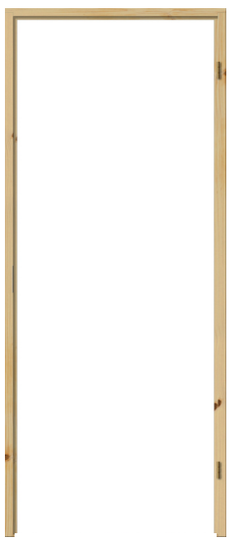

TECHNICAL DATA

Size	one sided M7-M10 x M20-M21 extended M13;13,3;14 x M20-21 double sided M13,3;15,3;17,3;19,3 x M20-21
Frame	pine, depth 92mm
Locking system	striking plate 0033
Hinges	6540
Finishing	white (S 0502-Y), special colour or unfinished
Mounting hole	Ø16/5, frame caps included
Extras	different widths, Norwegian groove, threshold, veneer covering

It is possible to get special solutions. More information from the representative.

VILJANDI
windows · doors

DOOR FRAME RU450D

DB02

	H	B	W	A
M7			690	625
M8			790	725
M9			890	825
M10			990	925
M20	1990	1940		
M21	2090	2040		

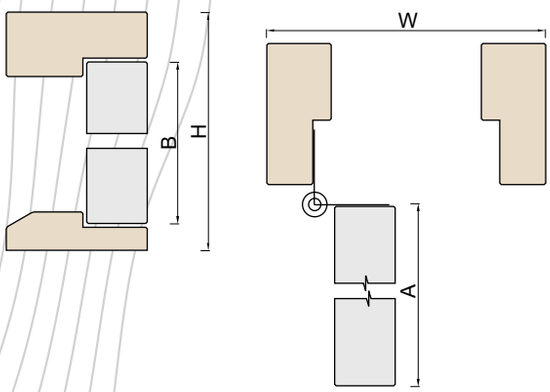

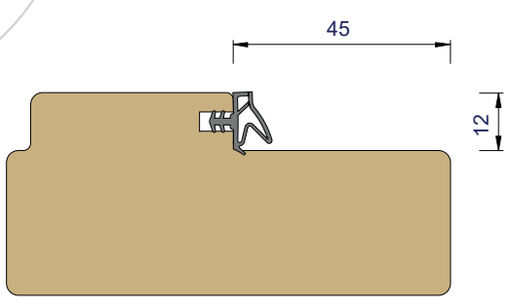

vau.ee

Thresholds for rebated doors _____ **DC01**

Thresholds for non-rebated doors ____ **DC02**

DC

Thresholds

table of contents

VILJANDI windows · doors

VILJANDI windows · doors

THRESHOLDS FOR REBATED DOOR

DC01

Thresholds are made of oak and lacquered.

SA

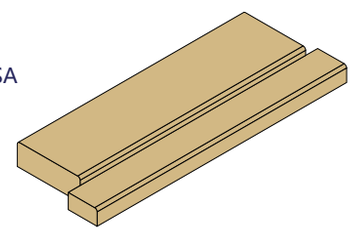

SU



SB

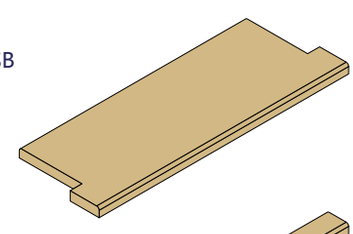

SV



DS



TECHNICAL DATA

Size	M7–19,4
Finishing	oak, lacquered
Extras	seal, different widths

	height	
SA	22	
SU	22	
SB	9	
SV	70	
DS	22	sealing

It is possible to get special solutions. More information from the representative.

VILJANDI windows · doors

THRESHOLDS FOR NON-REBATED DOOR

DC02

Thresholds are made of oak and lacquered.

RA

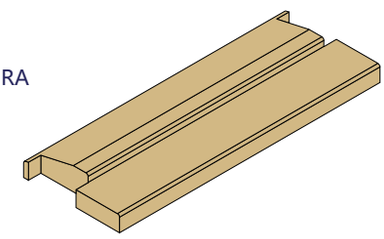

RC

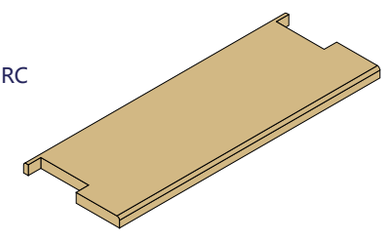

RM

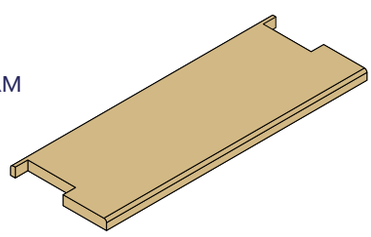

RB

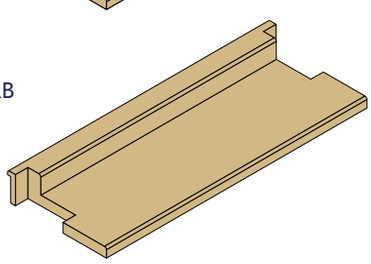

RI

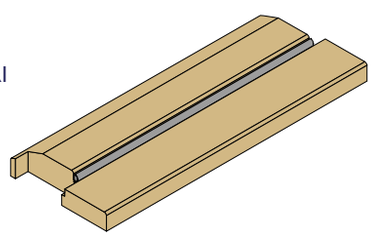

TECHNICAL DATA

Size	M7-19,3
Finishing	oak, lacquered
Extras	seal, different widths

	height	
RA	22	
RC	9	
RM	9	
RB	25	
RI	22	sealing

It is possible to get special solutions. More information from the representative.

External door standard ____ EA

External door premium ____ EB

External fire-resistant doors ____ EC

External doors with security class ____ ED

Sidelights ____ EE

External door designe ____ EF



E

EXTERNAL DOORS

table of contents

VILJANDI windows • doors

ED62-T1 _____ **EA01**

ED62-T2 _____ **EA02**

Garage door GP _____ **EA05**

ED62-SI-T2 _____ **EA06**

ED60 _____ **EA07**

External doors Standard

table of contents

VILJANDI
windows · doors

VILJANDI windows · doors

STANDARD EXTERNAL DOOR ED62-T1

EA01

Outward opening external door with 1-sealing.

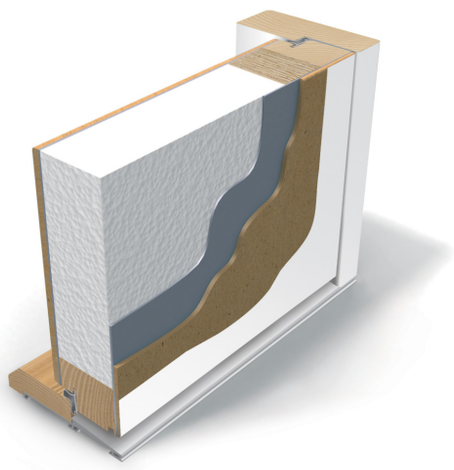

Sound insulation	26dB without glass 28dB with glass
Water tightness	Class 7B
Air permeability	Class 4
Resistance to wind load	Class C3
Thermal transmittance	0.77 W/m²K without glass 1.0 W/m²K with glass

TECHNICAL DATA



Size	one sided M9-10 x M20-21
	can be produced as a double-sided
Door leaf	thickness 62mm
Frame	pine, depth 105mm
Threshold	oak-aluminium, height 25mm
Locking system	lock case ASSA 565 and striking plate 0094
Hinges	plate hinges 3248
Finishing	white (S 0502-Y), special color or teak veneer
Glass	clear, diamante, cotzwold or satinovo
Extras	locks from different manufacturers, stainless steel kick plate, door closer, door eye, doorbell, moldings and / or shields

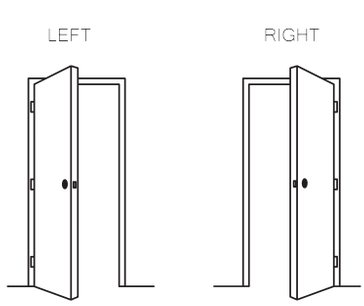

It is possible to get special solutions. More information from the representative.

vau.ee

VILJANDI
windows · doors

STANDARD EXTERNAL DOOR
ED62-T1

EA01

	H	B	W	A	A1	A2
M9			890	825	802	740
M10			990	925	902	840
M20	1989	1940				
M21	2089	2040				

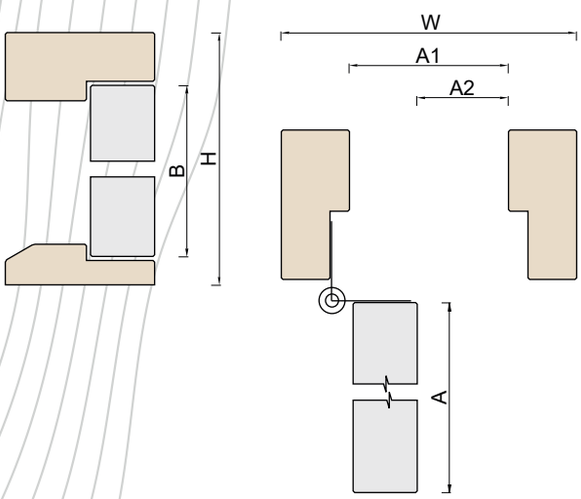

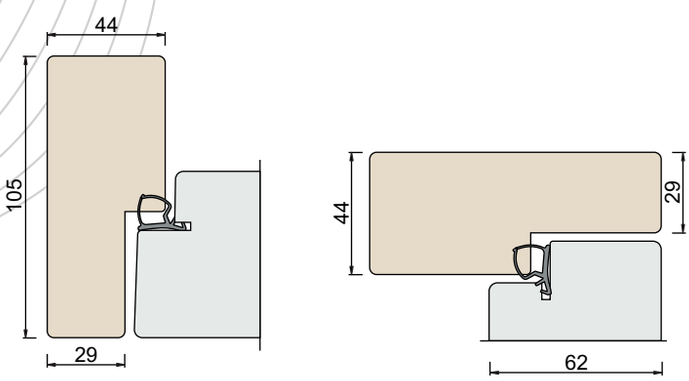

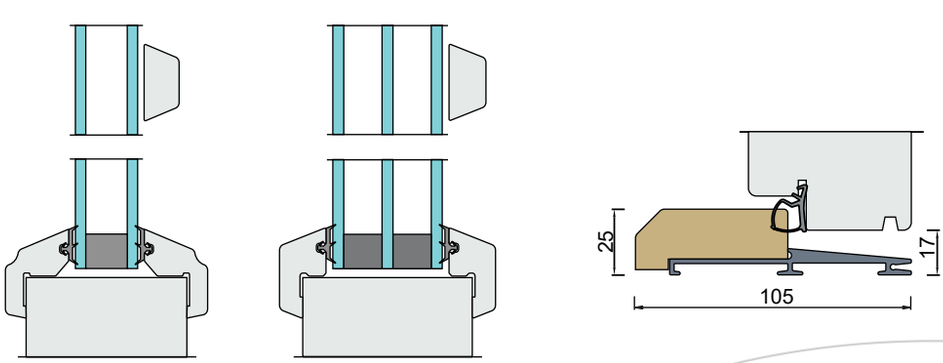

vau.ee

VILJANDI windows · doors

STANDARD EXTERNAL DOOR ED62-T2

EA02

Outward opening external door with 2-sealing.

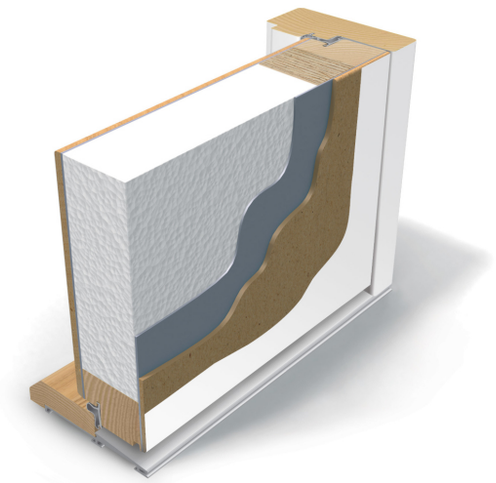

Sound insulation	26dB without glass 28dB with glass
Water tightness	Class 7B
Air permeability	Class 4
Resistance to wind load	Class C3
Thermal transmittance	0.77 W/m²K without glass 1.0 W/m²K with glass

TECHNICAL DATA



Size	one sided M9-10 x M20-21
	can be produced as a double-sided
Door leaf	thickness, 62mm
Frame	pine, depth 105mm
Threshold	oak-aluminium, height 25mm
Locking system	lock case ASSA 565 and striking plate 0094
Hinges	plate hinges 110-36
Finishing	white (S 0502-Y), special color or teak veneer
Glass	clear, diamante, cotzwold or satinovo
Extras	locks from different manufacturers, stainless steel kick plate, door closer, door eye, doorbell, moldings and / or shields

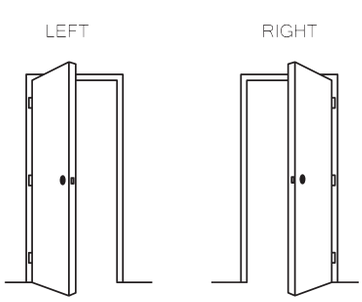

It is possible to get special solutions. More information from the representative.

VILJANDI
windows · doors

STANDARD EXTERNAL DOOR
ED62-T2

EA02

	H	B	W	A	A1	A2
M9			890	825	782	730
M10			990	925	882	830
M20	1989	1940				
M21	2089	2040				

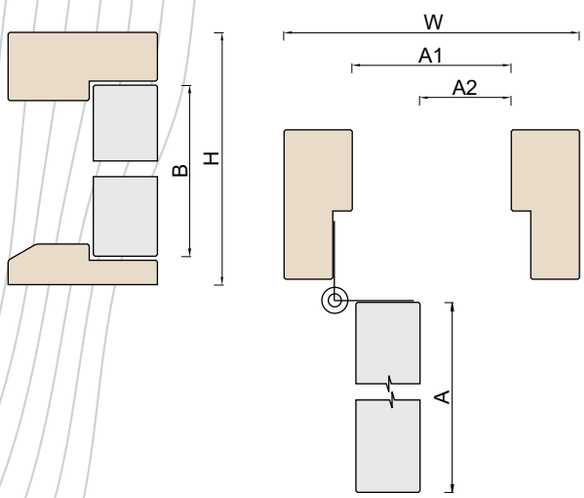











vau.ee

VILJANDI windows · doors

GARAGE DOOR GP

Outward opening double sided garage door.

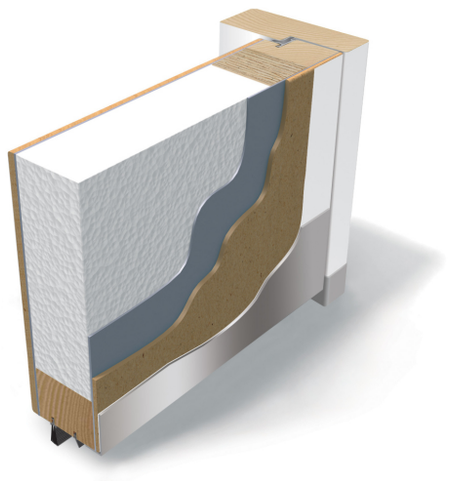

Thermal transmittance 0.83 W/m²K without glass

EA05

TECHNICAL DATA

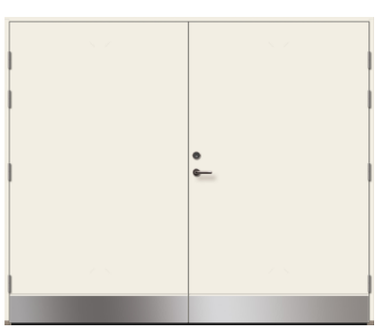

Size	M24-25 x M20-21
Door leaf	thickness 62mm
Frame	pine, depth 105mm, frame ends with stainless steel
Threshold	brush seal at the bottom of the door
Locking system	lock case ASSA 565 and striking plate 0094, surface latch ASSA 560-13
Hinges	platehinges 3248
Finishing	white (S 0502-Y), special color or teak veneer
Glass	clear, diamante, cotzwold or satinovo
Extras	ventilation grille

It is possible to get special solutions. More information from the representative.

VILJANDI windows · doors

GARAGE DOOR GP

EA05

	H	B	W	A	A1	A2
M24			2390	1167+1167	2302	2178
M25			2490	1217+1217	2402	2278
M20	1989	1940				
M21	2089	2040				



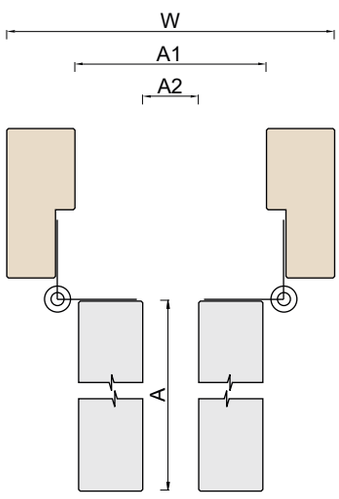

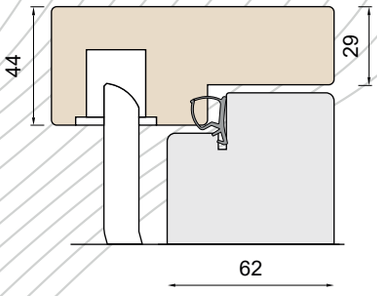

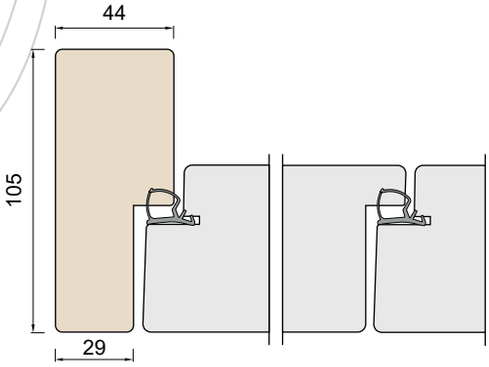

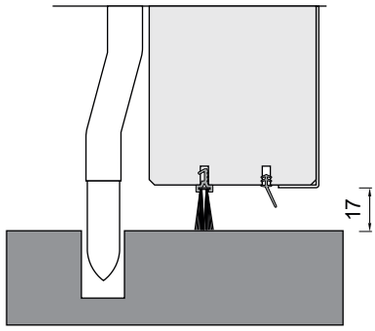

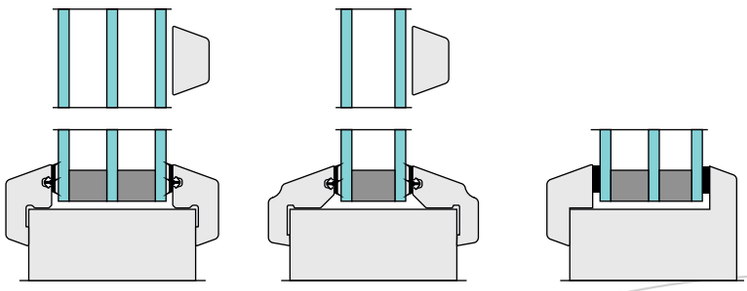

vau.ee

20211022

VILJANDI windows · doors

STANDARD EXTERNAL DOOR ED62-SI-T2

EA06

Inward opening external door with 2-sealing.

Sound insulation	26dB without glass 28dB with glass
Water tightness	Class 7B
Air permeability	Class 4
Resistance to wind load	Class C3

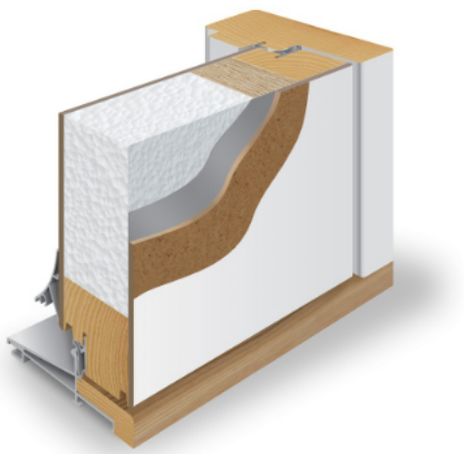

TECHNICAL DATA

Size	one sided M9-10 x M20-21
	can be produced as a double-sided
Door leaf	thickness 62mm
Frame	pine, depth 105mm
Threshold	oak-aluminium, height 25mm
Locking system	lock case ASSA 565 and striking plate 0094
Hinges	plate hinges 110x36
Finishing	white (S 0502-Y), special color or teak veneer
Glass	clear, diamante, cotzwold or satinovo
Extras	locks from different manufacturers, stainless steel kick pate, door closer, door eye, doorbell, moldings and / or shields



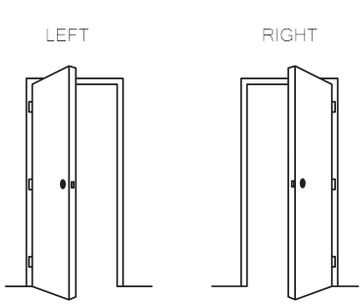

It is possible to get special solutions. More information from the representative.

vau.ee

VILJANDI
windows · doors

STANDARD EXTERNAL DOOR
ED62-SI-T2

EA06

	H	B	W	A	A1	A2
M9			890	825	782	730
M10			990	925	882	830
M20	1988	1940				
M21	2088	2040				

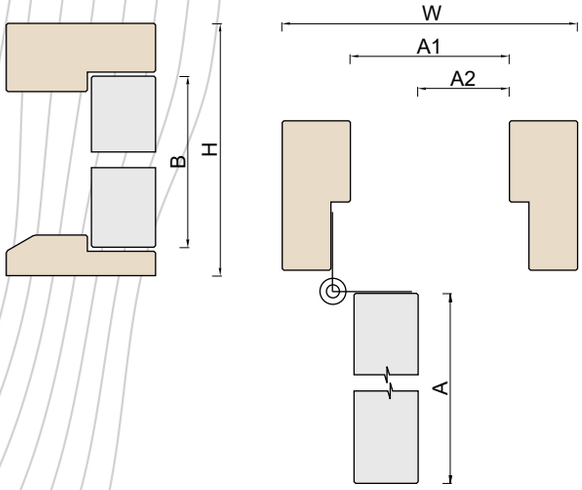





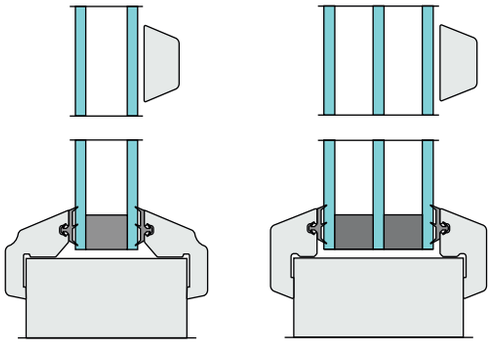

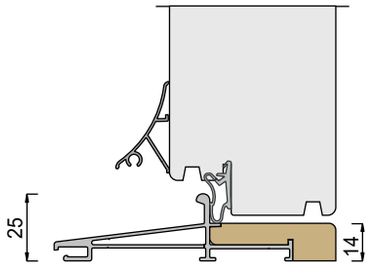

vau.ee

VILJANDI windows · doors

EXTERNAL DOOR ED60

EA07

Outward opening external door with 1-sealing

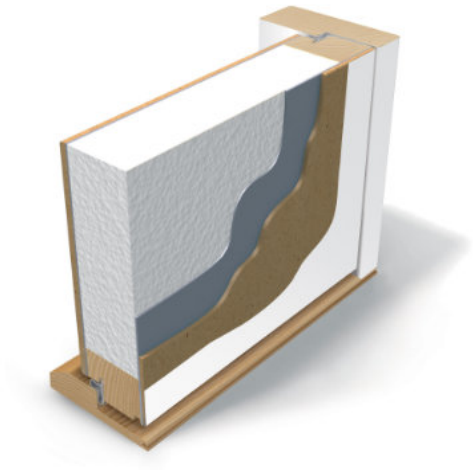

Water tightness	Class 4B
Air permeability	Class 4
Resistance to wind load	Class C3
Thermal transmittance	0,84 W/m²K without glass 1,01-1,09 W/m²K with glass

TECHNICAL DATA



Size	one sided M9,10 x M20,21
Door leaf	thickness 62mm
Frame	pine, depth 92mm
Threshold	birch, height 25mm
Locking system	lock case ASSA 565 ja striking plate 0094
Hinges	plate hinges 3248
Finishing	white (S 0502-Y)
Glass	clear, diamante or cotzwold
Extras	locks from different manufacturers, grooved pattern max depth 2mm

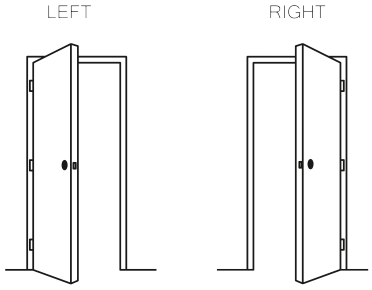

20240221

VILJANDI
windows · doors

EXTERNAL DOOR ED60

EA07

	H	B	W	A	A1	A2
M9			890	825	802	740
M10			990	925	902	840
M20	1991	1940				
M21	2091	2040				

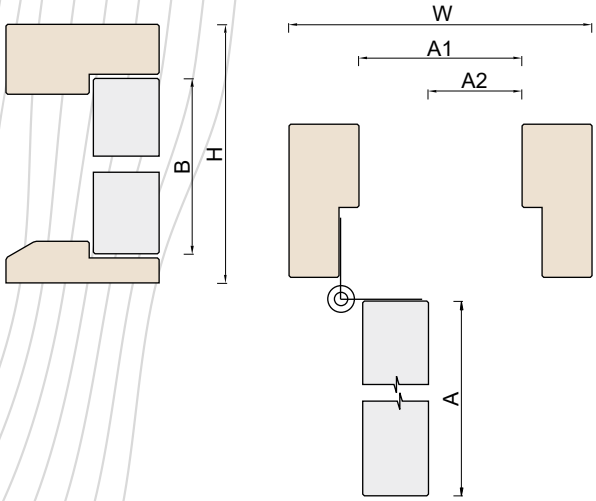

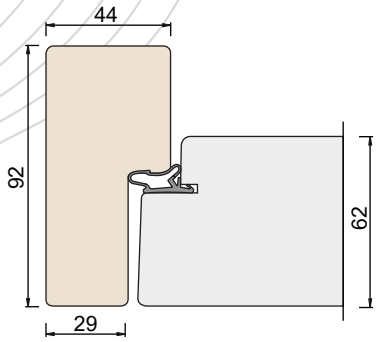







ED63 Funkis ____ **EB01**

ED65 Laminated ____ **EB03**

ED78 Thermo ____ **EB04**

EB

External doors Premium

table of contents

VILJANDI windows · doors

VILJANDI windows · doors

EXTERNAL DOOR FUNKIS ED63

EB01

Outward opening external door with 1-sealing and hidden hinges.

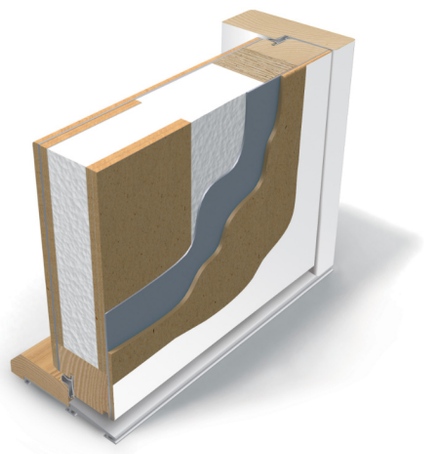

Water tightness	Class 7B
Air permeability	Class 4
Resistance to wind load	Class C3

TECHNICAL DATA

Size	one sided M9-10 x M20-21
	can be produced as a double-sided
Door leaf	thickness 62mm
Frame	pine, depth 105mm
Threshold	oak-aluminium, height 25mm
Locking system	lock case ASSA 565 and striking plate 0094
Hinges	hidden hinges
Finishing	white (S 0502-Y) or special colour
Glass	clear, diamante, cotzwold or satinovo
Extras	locks from different manufactures, stainless steel kick plate, door closer, door eye, doorbell



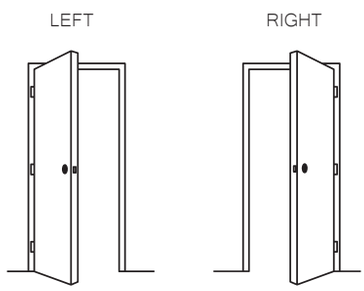

It is possible to get special solutions. More information from the representative.

vau.ee

VILJANDI
windows · doors

EXTERNAL DOOR FUNKIS ED63

EB01

	H	B	W	A	A1	A2
M9			890	825	802	740
M10			990	925	902	840
M20	1989	1940				
M21	2089	2040				

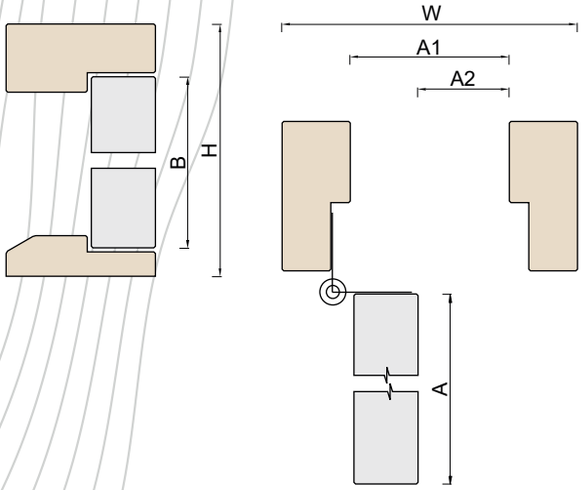

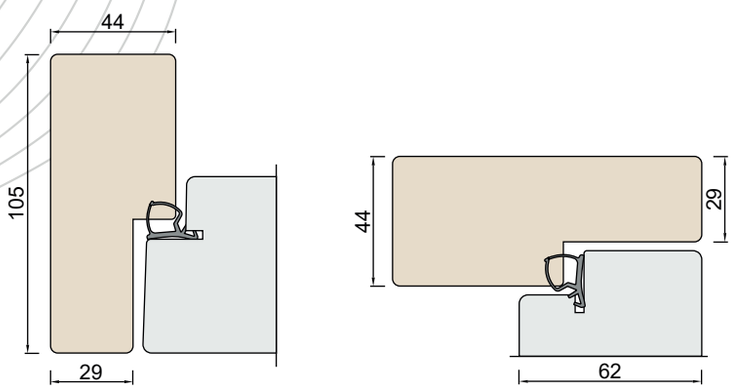

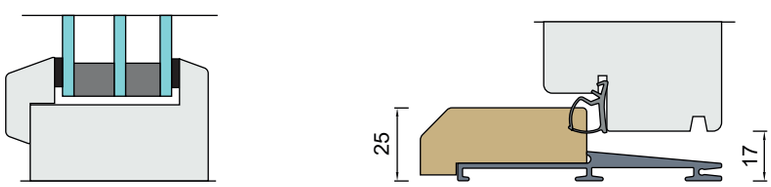

vau.ee

20211022

VILJANDI windows · doors

LAMINATED EXTERNAL DOOR ED65

EB03

Outward opening laminated external door.

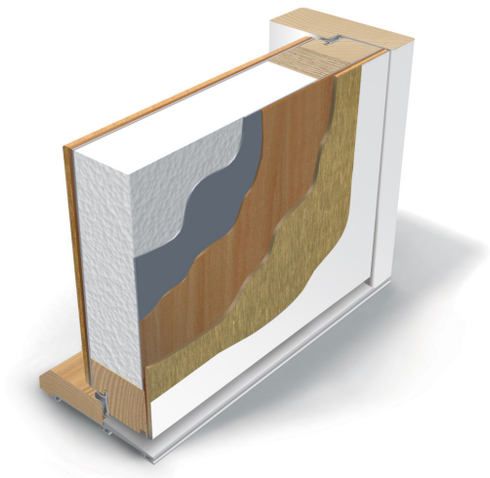

Water tightness	Class 7B
Air permeability	Class 4
Resistance to wind load	Class C3
Thermal transmittance	0.77 W/m²K without glass 1.0 W/m²K with glass

TECHNICAL DATA



Size	one sided M9-10 x M20-21
	can be produced as a double-sided
Door leaf	thickness 65mm
Frame	pine, depth 105mm
Threshold	oak-aluminium, height 25mm
Locking system	lock case ASSA 565 and striking plate 0094
Hinges	plate hinges 3248
Finishing	white (S 0502-Y), special colour
Glass	clear, diamante, cotzwold or satinovo
Extras	locks from different manufactures, stainless steel kick plate, door closer, door eye, doorbell

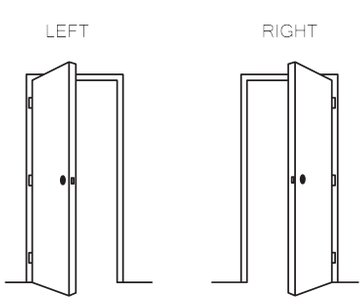

It is possible to get special solutions. More information from the representative.

vau.ee

VILJANDI
windows · doors

LAMINATED EXTERNAL DOOR ED65

EB03

	H	B	W	A	A1	A2
M9			890	825	802	737
M10			990	925	902	837
M20	1989	1940				
M21	2089	2040				

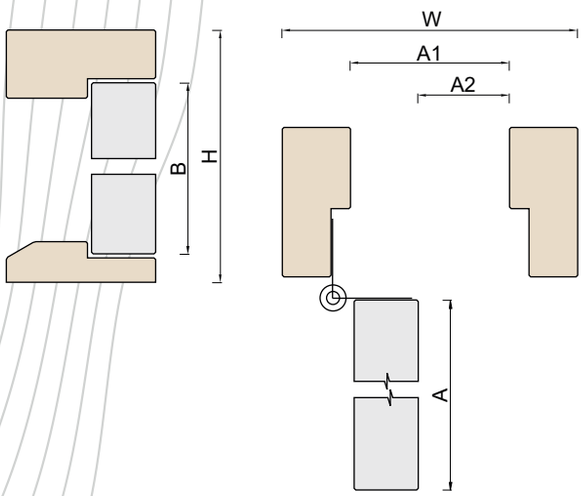

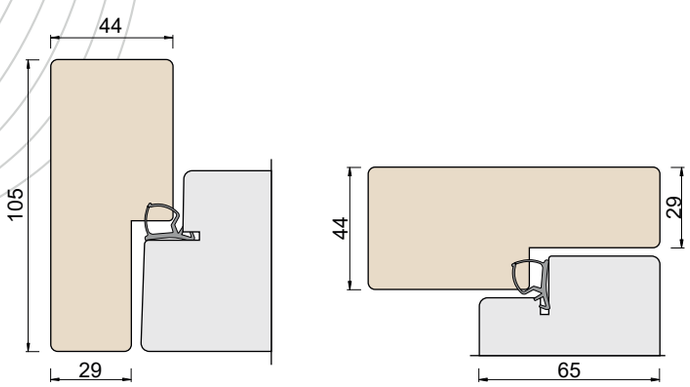

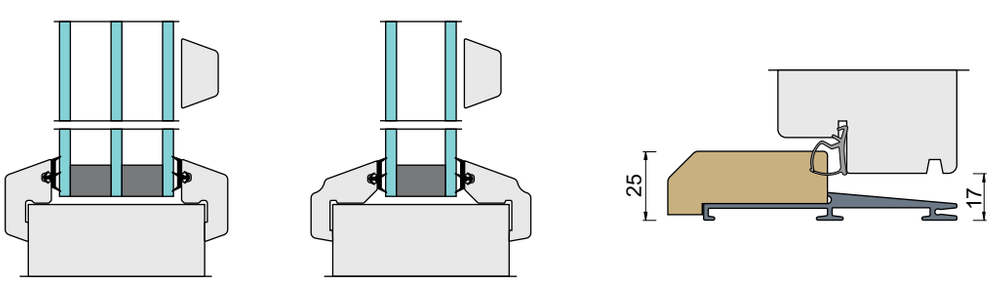

vau.ee

VILJANDI windows · doors

EXTERNAL DOOR THERMO ED78

EB04

Outward opening external door with 1-sealing and thermo content.

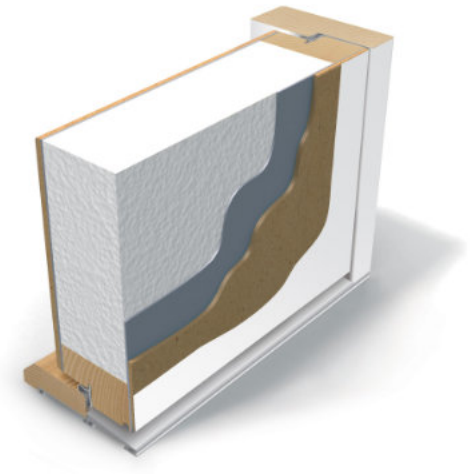

Water tightness	Class 7B
Air permeability	Class 4
Resistance to wind load	Class C3
Thermal transmittance	0.67 W/m²K without glass 0.92-0.74 W/m²K with glass



TECHNICAL DATA

Size	one sided M9-10 x M20-21 can be produced as a double-sided
Door leaf	thickness 78mm
Frame	pine, depth 105mm
Threshold	oak-aluminium, height 25mm
Locking system	lock case ASSA 565 and striking plate 0094
Hinges	plate hinges 3248
Finishing	white (S 0502-Y), special colour or teak veneer
Glass	3×glass clear, diamante, cotzwold or satinovo
Extras	locks from different manufacturers, stainless steel kick plate, door closer, door eye, doorbell, moldings and / or shields

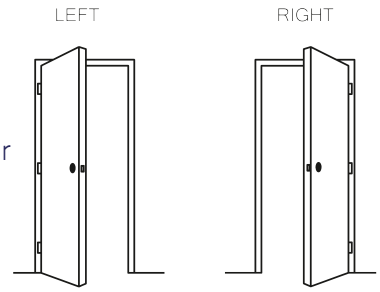

It is possible to get special solutions. More information from the representative.

VILJANDI
windows · doors

EXTERNAL DOOR THERMO ED78

EB04

	H	B	W	A	A1	A2
M9			890	825	802	724
M10			990	925	902	824
M20	1989	1940				
M21	2089	2040				

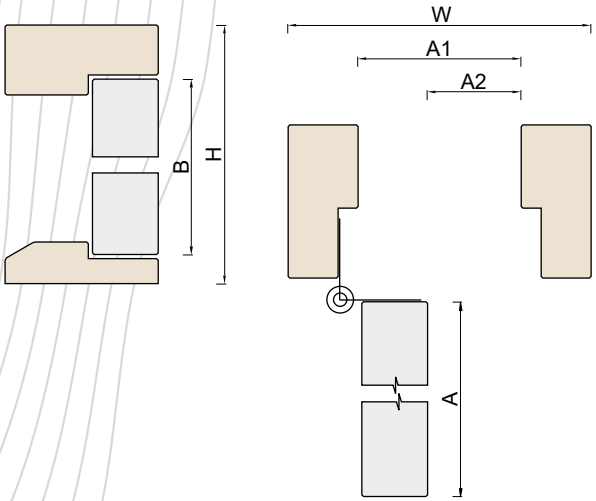

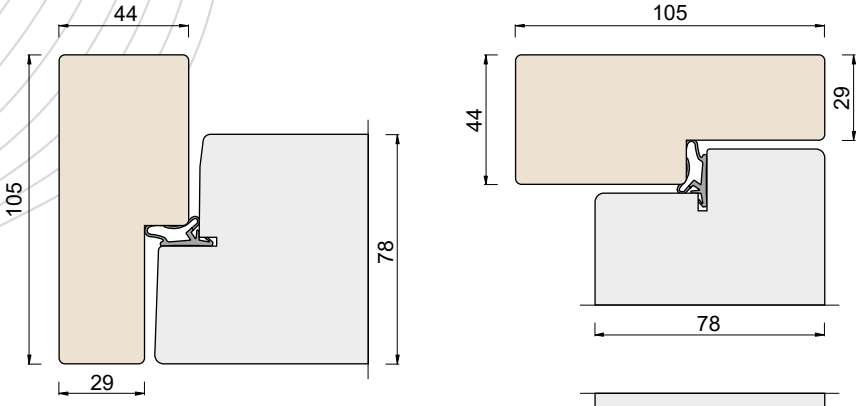

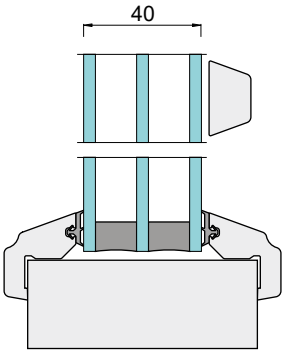

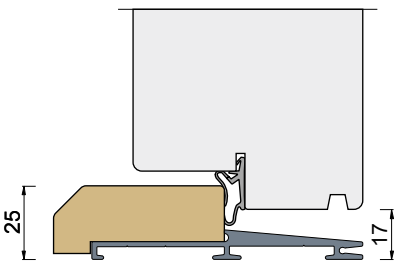

ED178-T1-30 **EC03**

ED178-T2-30 **EC04**

ED178-T1-60 **EC05**

ED178-T2-60 **EC06**

EC

External fire-resistant doors

table of contents

VILJANDI
windows · doors

VILJANDI windows · doors

FIRE- AND SOUND RESISTANT EXTERNAL DOOR ED178-T1-30

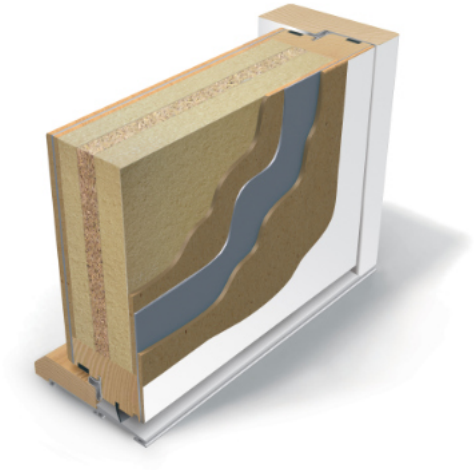

Outward opening fire resistant external door with 1-sealing.

Fire resistance	EI$_1$30
Sound insulation	Rw35-36dB
Water tightness	7B
Air permeability	Class 4
Thermal transmittance	0,85 W/m²K without glass
	1,31-0,95 W/m²K with glass

EC03

TECHNICAL DATA



Size	M9-10 x M20-21
Door leaf	thickness 78mm
Frame	pine, depth 105mm
Threshold	oak-aluminium, height 25mm
Locking system	lock case ASSA 410 or 310, striking plate 1487-2
Hinges	plate hinges Abloy 110-36KSS
Finishing	white (S 0502-Y), special colour or teak veneer
Extras	locks from different manufacturers, stainless steel klick plate, door closer, door eye, grooved pattern, glued decorative panels and/or moldings

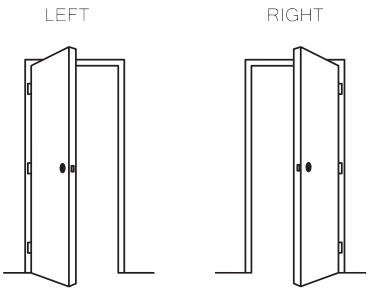

It is possible to get special solutions. More information from the representative.

vau.ee

VILJANDI windows · doors

FIRE- AND SOUND RESISTANT EXTERNAL DOOR ED178-T1-30

EC03

	H	B	W	A	A1	A2
M9			890	825	802	724
M10			990	925	902	824
M20	1989	1940				
M21	2089	2040				

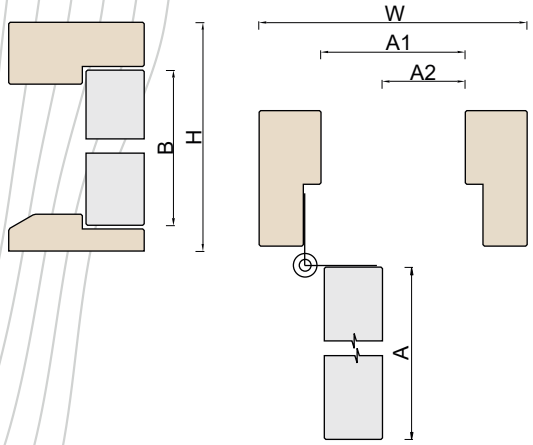

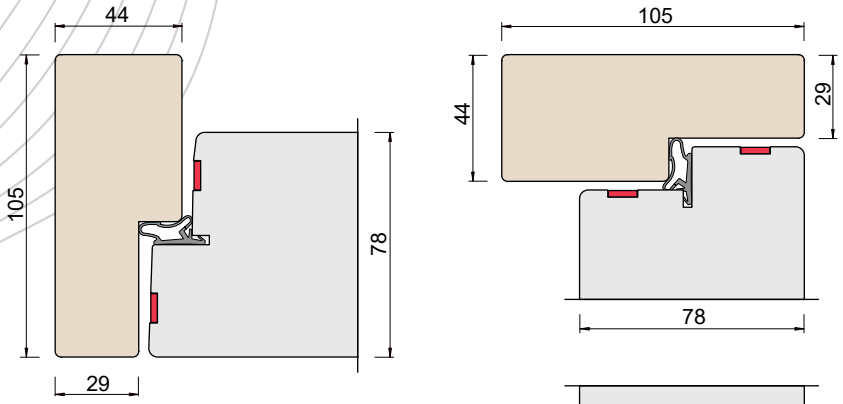

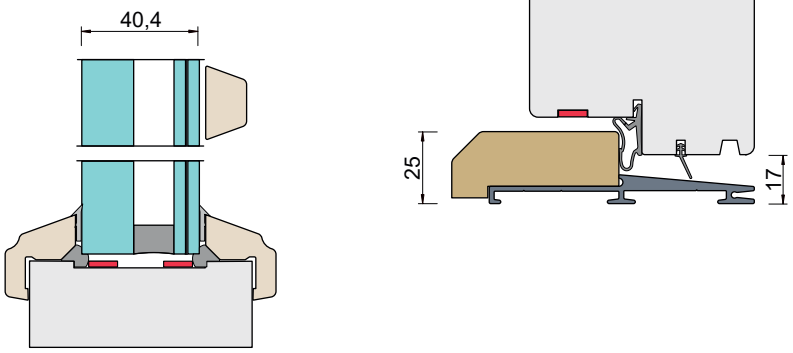

vau.ee

VILJANDI windows · doors

FIRE- AND SOUND RESISTANT EXTERNAL DOOR ED178-T2-30

EC04

Outward opening fire resistant external door with 2-sealing.

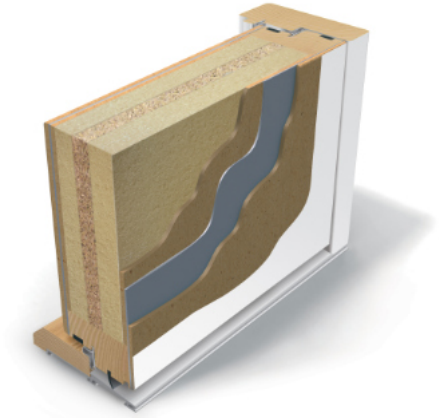

Fire resistance	$EI_1$30
Sound insulation	Rw38-41dB
Water tightness	7B
Air permeability	Class 4
Thermal transmittance	0,84 W/m²K without glass
	1,31-0,95 W/m²K with glass



TECHNICAL DATA



Size	M9-10 x M20-21, max 11x22
Door leaf	thickness 78mm
Frame	pine, depth 105mm
Threshold	oak-aluminium, height 25mm
Locking system	lock case ASSA 410 or 310, striking plate 1487-2
Hinges	plate hinges Abloy 110-36KSS
Finishing	white (S 0502-Y), special colour or teak veneer
Extras	locks from different manufacturers, extra lock 411, stainless steel klick plate, door closer, door eye, grooved pattern, glued decorativepanels and/or moldings, glass

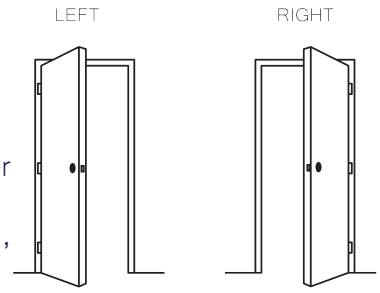

It is possible to get special solutions. More information from the representative.

vau.ee

VILJANDI
windows · doors

FIRE- AND SOUND RESISTANT EXTERNAL DOOR ED178-T2-30

EC04

	H	B	W	A	A1	A2
M9			890	825	782	714
M10			990	925	885	814
M20	1989	1940				
M21	2089	2040				

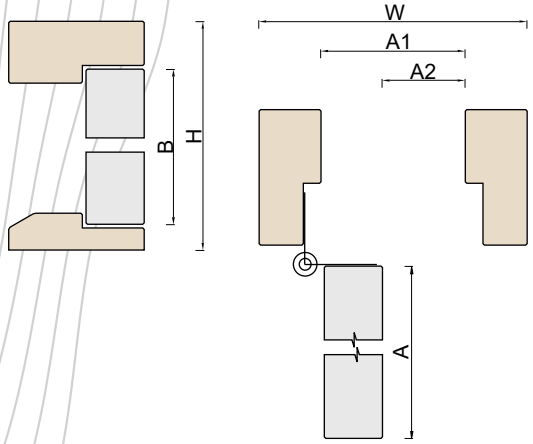

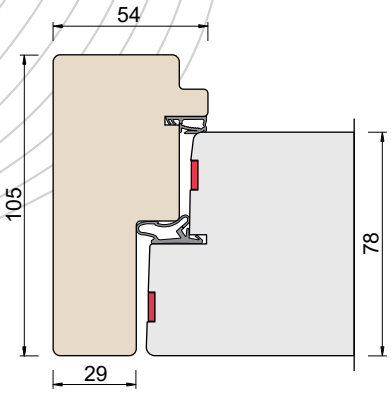

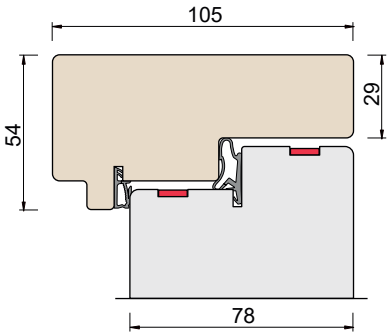



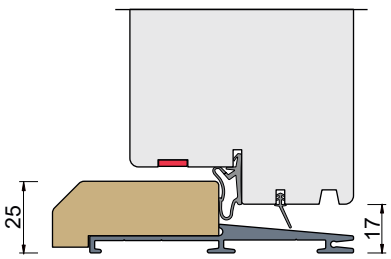

vau.ee

20240214

VILJANDI windows · doors

FIRE- AND SOUND RESISTANT EXTERNAL DOOR ED178-T1-60

EC05

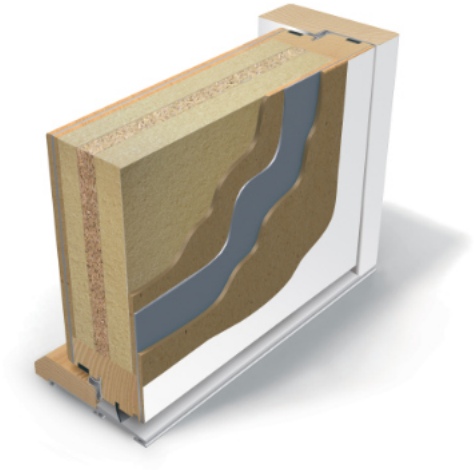

Outward opening fire resistant external door with 1-sealing.

Fire resistance	EI$_1$60
Sound insulation	Rw36dB
Water tightness	7B
Air permeability	Class 4
Thermal transmittance	0,85 W/m²K without glass
	1,11-0,95 W/m²K with glass



TECHNICAL DATA



Size	M9-10 x M20-21
Door leaf	thickness 78mm
Frame	pine, depth 105mm
Threshold	oak-aluminium, height 25mm
Locking system	lock case ASSA 410 or 310, striking plate 1487-2
Hinges	plate hinges Abloy 110-36KSS
Finishing	white (S 0502-Y), special colour or teak veneer
Extras	locks from different manufacturers, stainless steel klick plate, door closer, door eye, grooved pattern, glued decorative panels and/or moldings

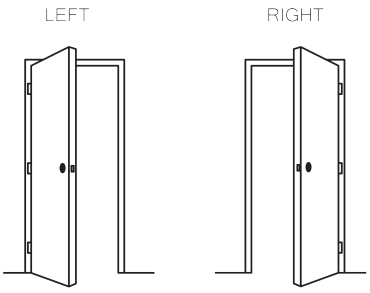

It is possible to get special solutions. More information from the representative.

vau.ee

VILJANDI windows · doors

FIRE- AND SOUND RESISTANT EXTERNAL DOOR ED178-T1-60

EC05

	H	B	W	A	A1	A2
M9			890	825	802	724
M10			990	925	902	824
M20	1989	1940				
M21	2089	2040				

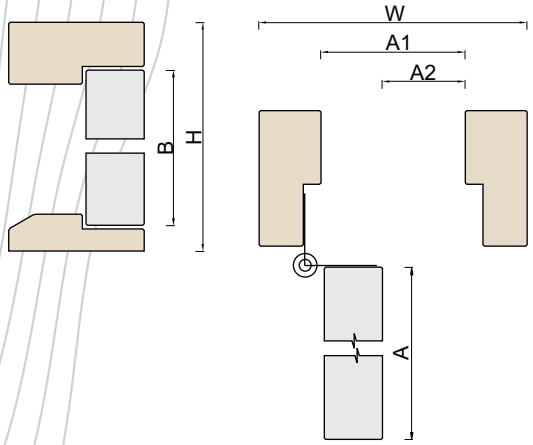

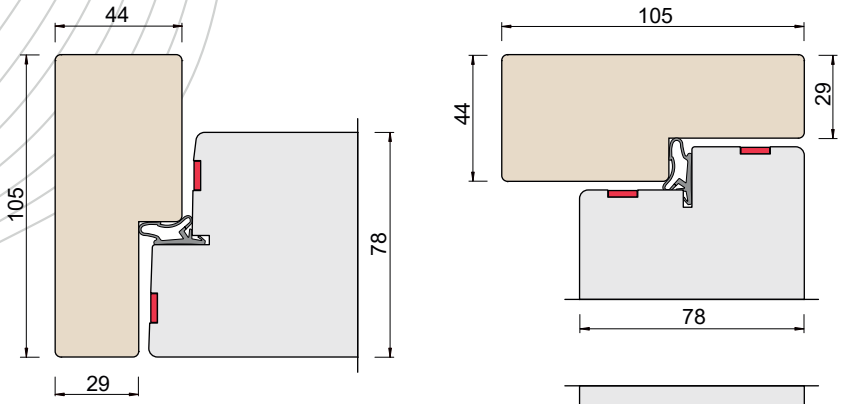

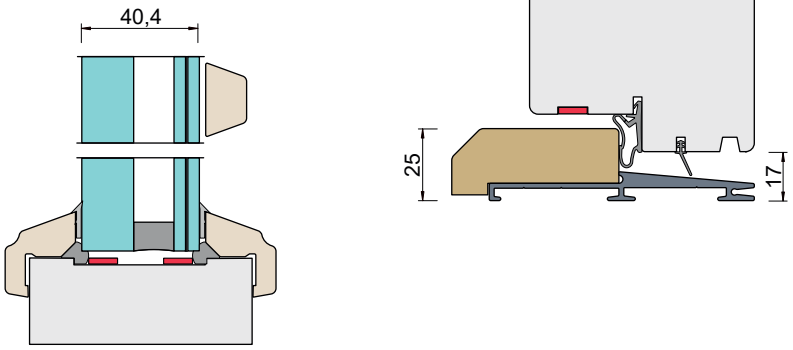

vau.ee

VILJANDI windows · doors

FIRE- AND SOUND RESISTANT EXTERNAL DOOR ED178-T2-60

EC06

Outward opening fire resistant external door with 2-sealing.

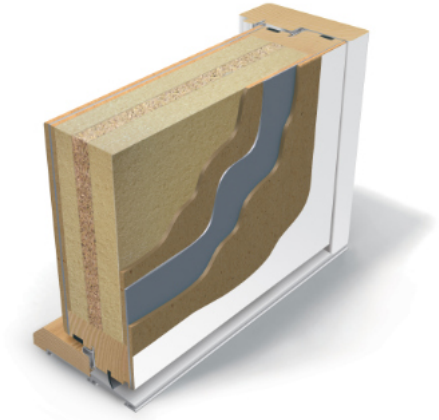

Fire resistance	EI60
Sound insulation	Rw38-40dB
Water tightness	7B
Air permeability	Class 4
Thermal transmittance	0,84 W/m²K without glass
	1,31-0,95 W/m²K with glass



TECHNICAL DATA



Size	M9-10 x M20-21, max 11x22
Door leaf	thickness 78mm
Frame	pine, depth 105mm
Threshold	oak-aluminium, height 25mm
Locking system	lock case ASSA 410 or 310, striking plate 1487-2
Hinges	plate hinges Abloy 110-36KSS
Finishing	white (S 0502-Y), special colour or teak veneer
Extras	locks from different manufacturers, extra lock 411, stainless steel klick plate, door closer, door eye, grooved pattern, glued decorativepanels and/or moldings, glass

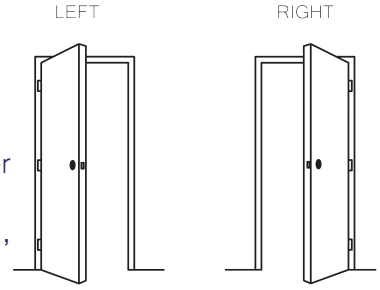

It is possible to get special solutions. More information from the representative.

vau.ee

VILJANDI
windows · doors

FIRE- AND SOUND RESISTANT EXTERNAL DOOR ED178-T2-60

EC06

	H	B	W	A	A1	A2
M9			890	825	782	714
M10			990	925	885	814
M20	1989	1940				
M21	2089	2040				

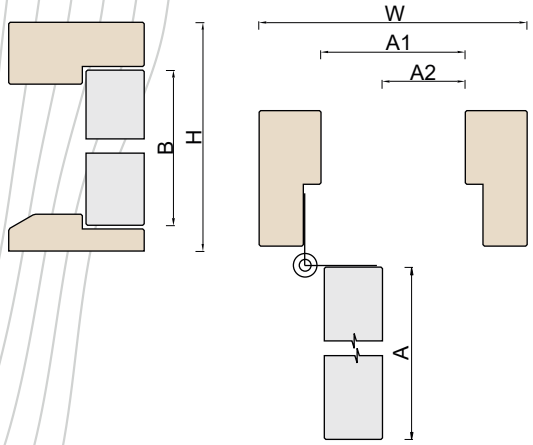

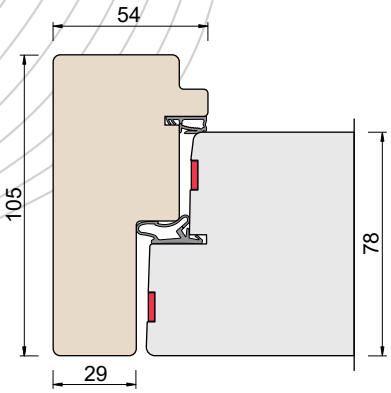

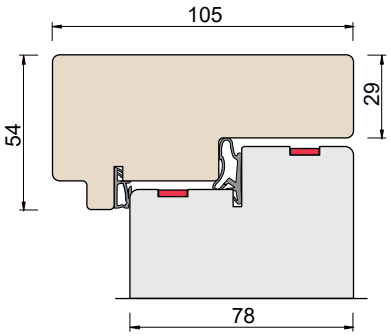



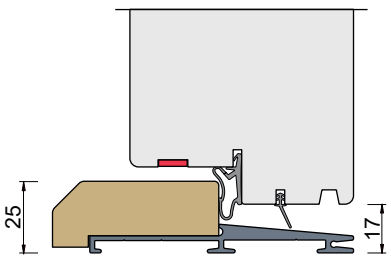

vau.ee

20240214

ED62-T1 RC2 **ED01**

ED

External doors with security class

table of contents

VILJANDI windows · doors

VILJANDI windows · doors

EXTERNAL DOOR ED62-T1 RC2

Outward opening external door with 1-sealing and security classification.

Sound insulation	Rw 26-28dB
Water tightness	Class 7B
Air permeability	Class 4
Resistance to wind load	Class C3
Thermal transmittance	0.77 W/m²K without glass 1.0 W/m²K with glass

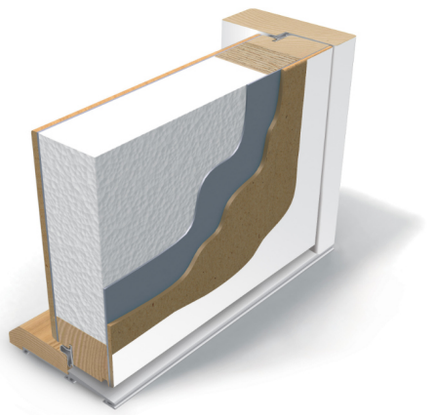

RC2

ED01

TECHNICAL DATA

Size	one sided M9-10 x M20-21
Door leaf	thickness 62mm
Frame	pine, depth 105mm
Threshold	oak-aluminium, height 25mm
Locking system	lock case ASSA 410 or ASSA 2002. Striking plate1487-2HD (metal safety plate on the back of the frame)
Hinges	plate hinges 3248-110 TMKSS (metal safety plate on the back of the frame)
Finishing	white (S 0502-Y), special colour or teak veneer
Glass	laminated clear, diamante, cotzwold or satinovo
Extras	stainless steel kick plate, door eye, doorbell, glued decorative panels and / or moldings



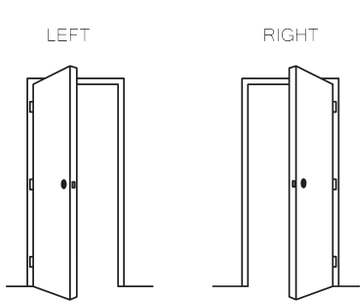

It is possible to get special solutions. More information from the representative.

vau.ee

VILJANDI
windows · doors

EXTERNAL DOOR ED62-T1 RC2

ED01

	H	B	W	A	A1	A2
M9			890	825	802	740
M10			990	925	902	840
M20	1989	1940				
M21	2089	2040				

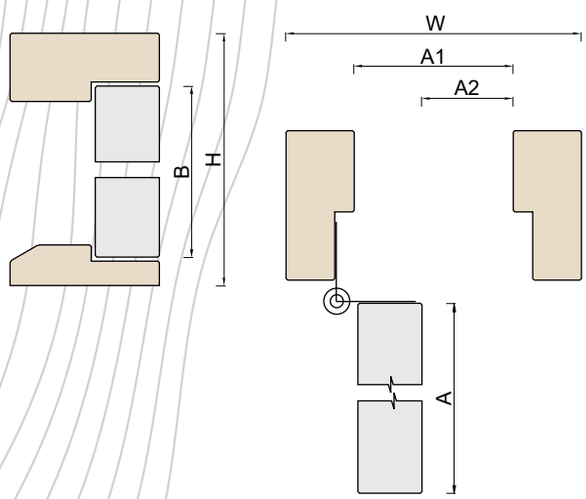

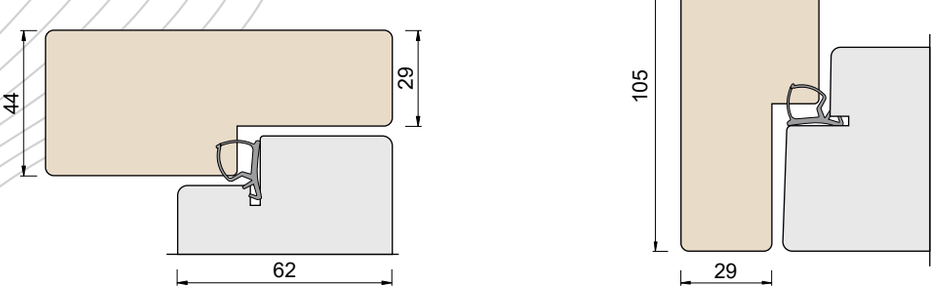



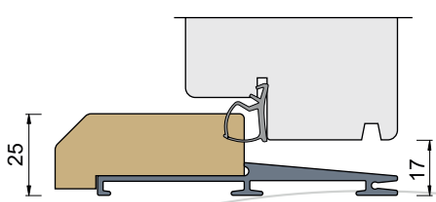

vau.ee

Sidelight S-1 ____ **EE01**

Sidelight S-1 Thermo ____ **EE02**

Sidelight SLP ____ **EE03**

Sidelight SLP Thermo ____ **EE04**

Top sidelight TL01 ____ **EE05**

Top sidelight TL01 Thermo ____ **EE06**

Sidelights

table of contents

VILJANDI
windows · doors

VILJANDI windows · doors

EXTERNAL DOOR SIDELIGHT S-1

EE01

Double-glazed fixed sidelight with wooden frame.

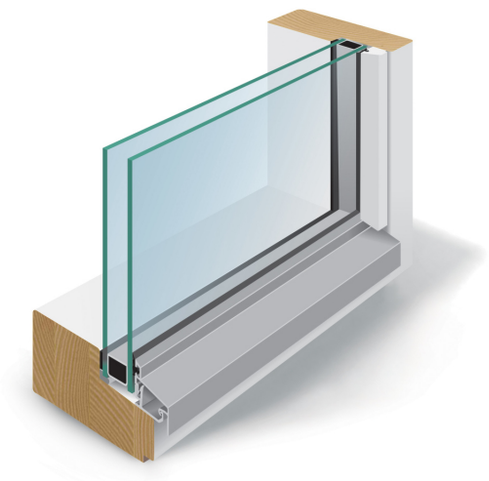

Air permeability Class 4



TECHNICAL DATA

Size	M3-5 x M20-21
Frame	pine, depth 105mm
Finishing	white (S 0502-Y) or special colour
Glass	clear, diamante, cotzwold, satinovo
Glazing bar	plastic
Extras	horizontal bars, teak veneer, stained

It is possible to get special solutions. More information from the representative.

VILJANDI
windows · doors

EXTERNAL DOOR SIDELIGHT S-1

EE01

	H_1	H_2	W_1	W_2
M3			290	202
M4			390	302
M5			490	402
M20	1989	1891		
M21	2089	1991		

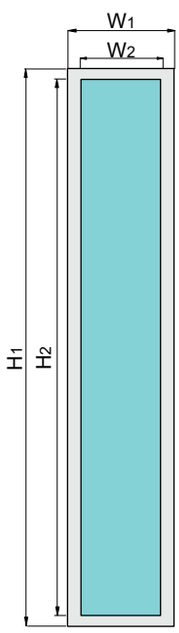

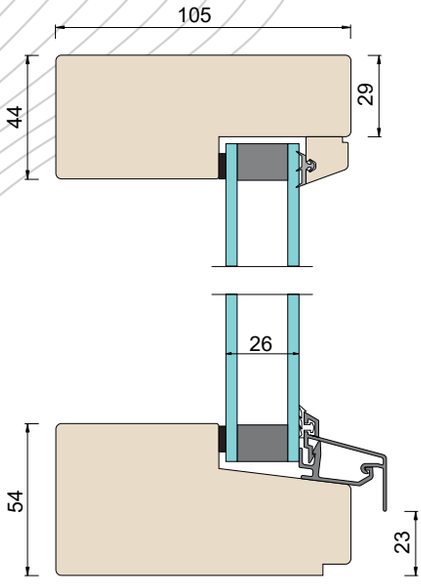

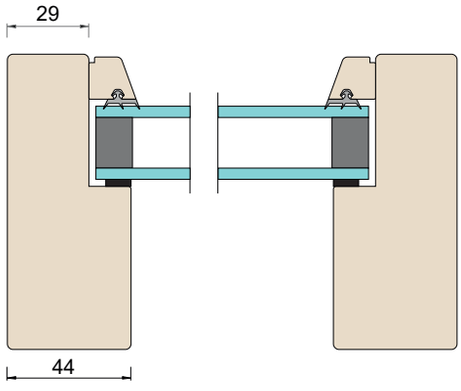

vau.ee

VILJANDI windows · doors

EXTERNAL DOOR SIDELIGHT S-1 THERMO

Triple-glazed fixed sidelight with wooden frame.

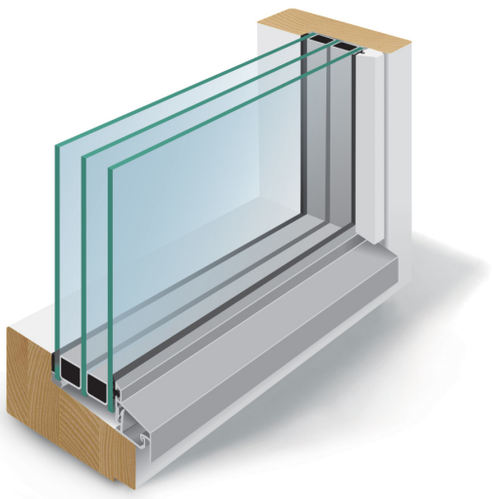

EE02

Air permeability Class 4



TECHNICAL DATA

Size	M3-5 x M20-21
Frame	pine, depth 105mm
Finishing	white (S 0502-Y) or special colour
Glass	clear, diamante, cotzwold, satinovo
Glazing bar	plastic
Extras	horizontal bars, teak veneer, stained

It is possible to get special solutions. More information from the representative.

VILJANDI
windows · doors

EXTERNAL DOOR SIDELIGHT S-1 THERMO

EE02

		H_1	H_2	W_1	W_2
M3				290	202
M4				390	302
M5				490	402
M20		1989	1891		
M21		2089	1991		

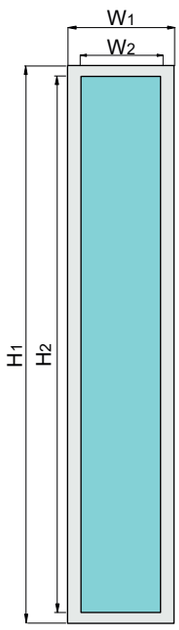

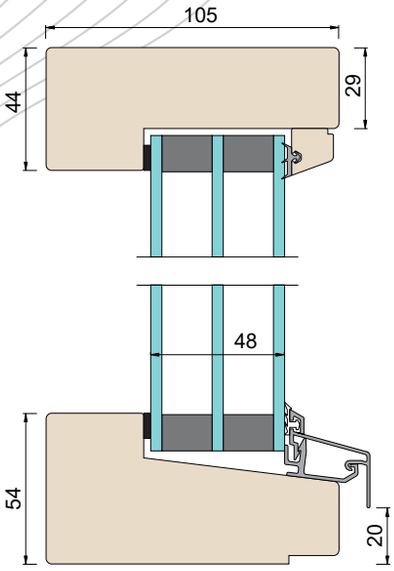

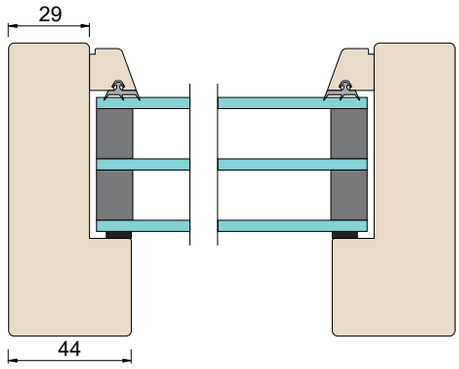

VILJANDI windows · doors

EXTERNAL DOOR SIDELIGHT SLP

Double-glazed fixed sidelight with wooden frame.

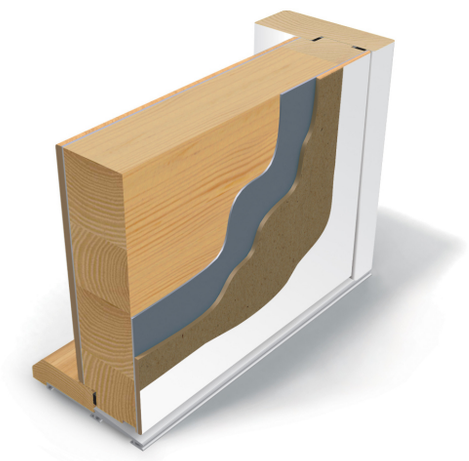

EE03

Air permeability	Class 4
Thermal transmittance	2,6-1,4 W/m²K



TECHNICAL DATA

Size	M3-5 x M20-21
Frame	pine, depth 105mm
Finishing	white (S 0502-Y) or special colour
Glass	clear, diamante, cotzwold, satinovo
Glazing bar	plastic
Extras	horizontal bars, teak veneer, stained

It is possible to get special solutions. More information from the representative.

VILJANDI windows · doors

EXTERNAL DOOR SIDELIGHT SLP

EE03

	H_1	W_1	W_2
M3		290	202
M4		390	302
M5		490	402
M20	1989		
M21	2089		

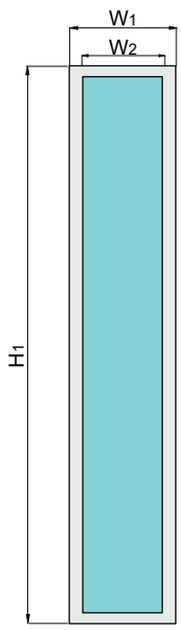

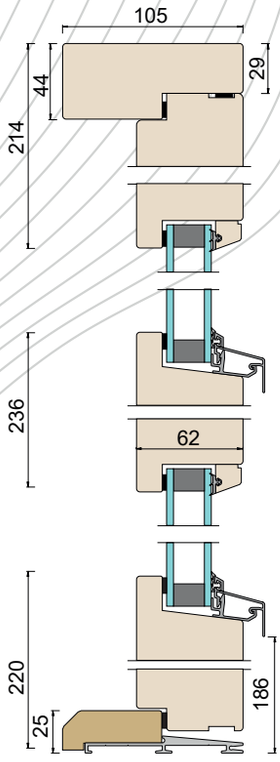

SLP-2B

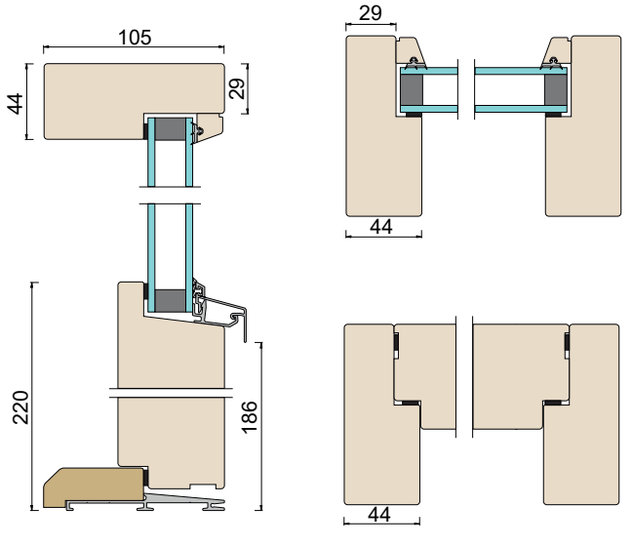

SLP-1B

vau.ee

VILJANDI windows · doors

EXTERNAL DOOR SIDELIGHT SLP THERMO

Triple-glazed fixed sidelight with wooden frame.

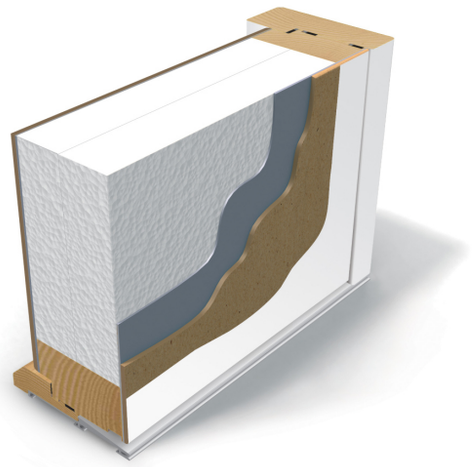

EE04

Air permeability Class 4



TECHNICAL DATA

Size	M3-5 x M20-21
Frame	pine, depth 105mm
Finishing	white (S 0502-Y) or special colour
Glazing bar	clear, diamante, cotzwold, satinovo
Glass strip	plastic
Extras	horizontal bars, teak veneer, stained

It is possible to get special solutions. More information from the representative.

VILJANDI
windows · doors

EXTERNAL DOOR SIDELIGHT
SLP THERMO

EE04

	H_1	W_1	W_2
M3		290	202
M4		390	302
M5		490	402
M20	1989		
M21	2089		

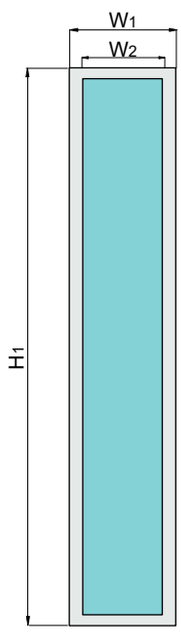

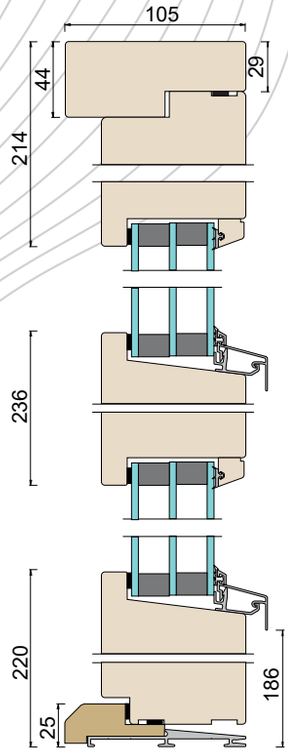

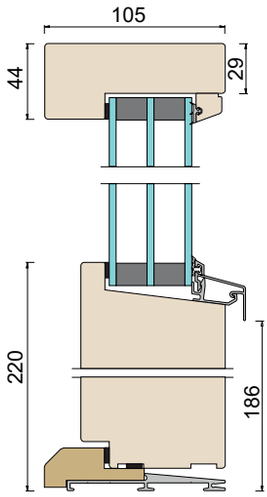

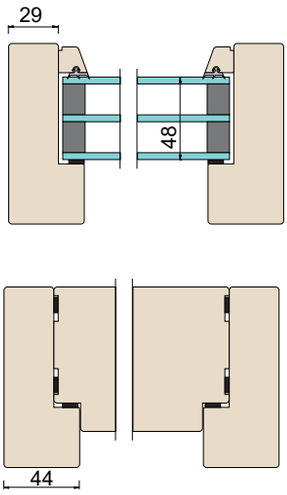

vau.ee

VILJANDI windows · doors

EXTERNAL DOOR OVERLIGHT TL01

Double-glazed fixed overlight with wooden frame.



EE05

Air permeability	Class 4
Thermal transmittance	2,6–1,5 W/m²K

TECHNICAL DATA



Size	M9–10 x M3–5
Frame	pine, depth 105mm
Finishing	white (S 0502-Y) or special colour
Glass	clear, diamante, cotzwold, satinovo
Glazing bar	plastic
Extras	horizontal bars, teak veneer, stained

It is possible to get special solutions. More information from the representative.

VILJANDI
windows · doors

EXTERNAL DOOR OVERLIGHT
TL01

EE05

	H_1	H_2	W_1	W_2
M3	290	202		
M4	390	302		
M5	490	402		
M9			890	802
M10			990	902

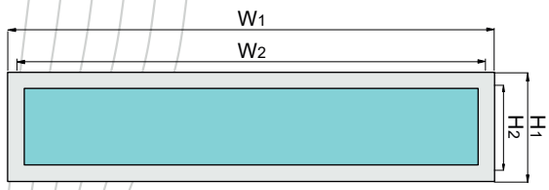

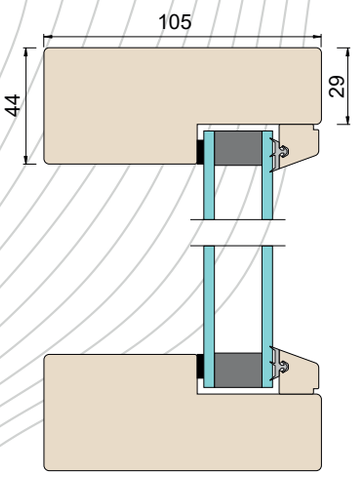

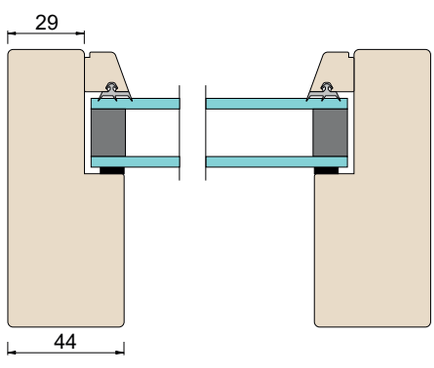

vau.ee

VILJANDI windows · doors

EXTERNAL DOOR OVERLIGHT TL01 THERMO

Triple-glazed fixed overlight with wooden frame.

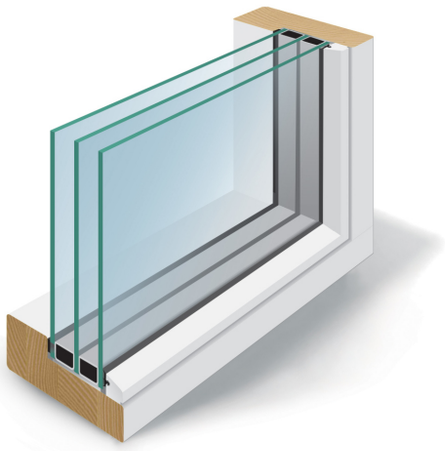

EE06

Air permeability Class 4

TECHNICAL DATA



Size	M9-10 x M3-5
Frame	pine, depth 105mm
Finishing	white (S 0502-Y) or special colour
Glass	clear, diamante, cotzwold, satinovo
Glazing bar	plastic
Extras	horizontal bars, teak veneer, stained

It is possible to get special solutions. More information from the representative.

VILJANDI
windows · doors

EXTERNAL DOOR OVERLIGHT
TL01 THERMO

EE06

		H_1	H_2	W_1	W_2
M3		290	202		
M4		390	302		
M5		490	402		
M9				890	802
M10				990	902

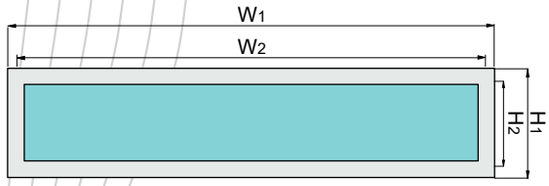

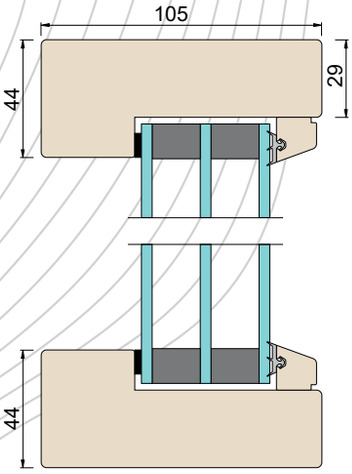

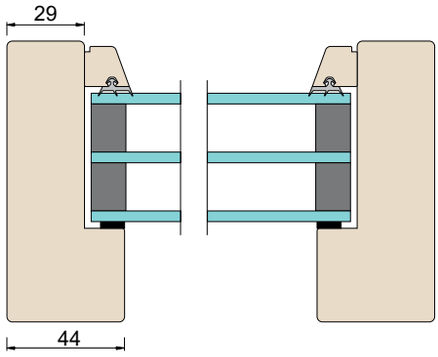

vau.ee

Inward opening single-frame wooden-aluminium windows and balcony doors FA

Inward opening double-frame wooden windows and balcony doors FB

Inward opening double-frame wooden-aluminium windows and balcony doors FC

Outward opening single-frame wooden windows and balcony doors FD

Outward opening single-frame wooden-aluminium windows and balcony doors FE

Outward opening double-frame wooden windows and balcony doors FF

Outward opening double-frame wooden-aluminium windows and balcony doors FG

Fire resistant windows FH

Windows with security class FI

Sliding doors FJ

Folding doors FK



F

WINDOWS AND BALCONY DOORS

table of contents

VILJANDI windows · doors

TKO 3 ____ **FA01**

TKO 3 balcony door ____ **FA02**

FA

Inward opening single frame wooden-aluminium windows and balcony doors

table of contents

VILJANDI windows • doors

VILJANDI windows · doors

WOODEN-ALUMINIUM WINDOW TKO 3

Inward opening wooden-aluminium window with triple-glazed.

Water tightness	Class 9A
Sound insulation	Rw32dB
Air permeability	Class 4
Resistance to wind load	Class C3
Thermal transmittance	0,85-0,79 W/m²K



FA01

TECHNICAL DATA

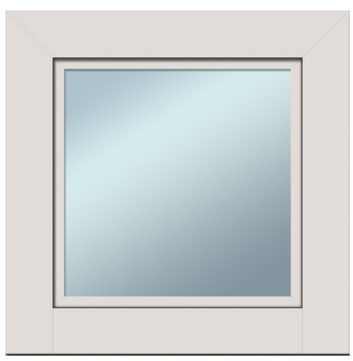

Size	480-1280 x 480-2080mm
Construction	single frame
Opening	inward, tilt-turn
Frame	pine, depth 106mm
Glass	triple-glazed, thickness 48mm
Fittings	G.U Uni-Jet
Handle	G.U. BKS, lockable
Finishing	wood white (S 0502-Y), special colour or unfinished. Aluminium tone RAL9010 or according to colour card.
Extras	ventilation valve, glued or betwee glass bar

It is possible to get special solutions. More information from the representative.

VILJANDI windows · doors

WOODEN-ALUMINIUM WINDOW TKO 3

TKO3

min/max width x height

	M4	M5	M6	M7	M8	M9	M10	M11	M12	M13	M14	M15	M16
M5													
M6													
M7													
M8													
M9													
M10													
M11													
M12													
M13													
M14													
M15													
M16													
M17													
M18													
M19													
M20													
M21													

- difficulties with opening
- details too short for line production
- support while opening
- recommended size range

FA01

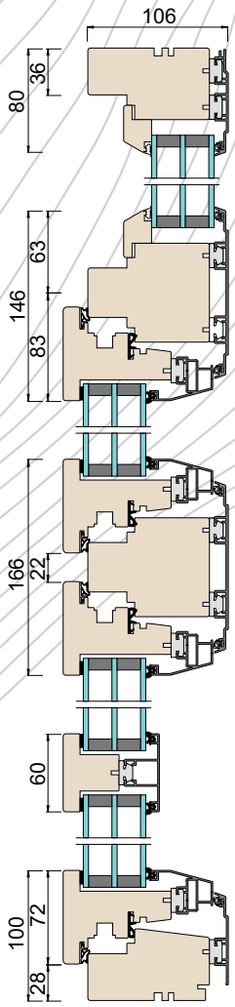

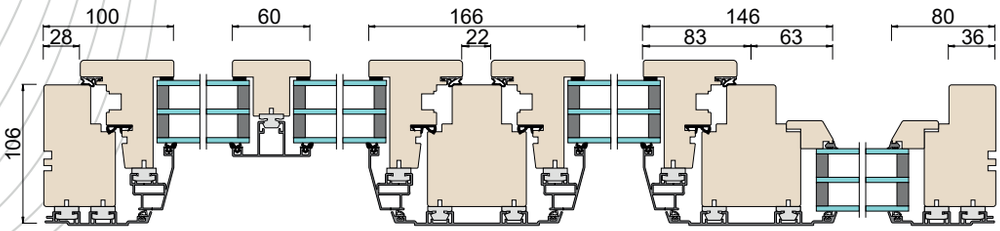

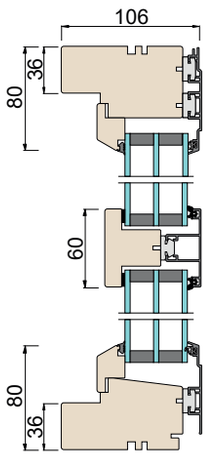

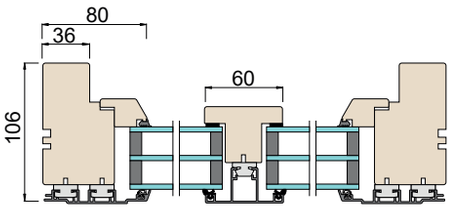

vau.ee

VILJANDI windows · doors

WOODEN-ALUMINIUM BALCONY DOOR TKO3D

Inward opening wooden-aluminium balcony door with triple-glazed.

Water tightness	Class E750
Air permeability	Class 4
Resistance to wind load	Class C3

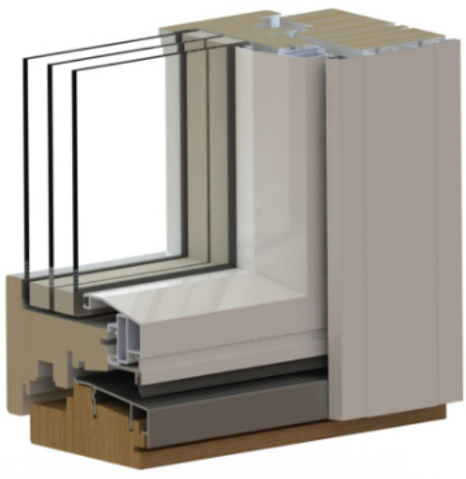

TECHNICAL DATA

Size	680-980 x 1890-2180mm
Construction	single frame
Opening	inward
Frame	pine, depth 106mm
Glass	triple-glazed, thickness 48mm
Fittings	G.U Uni-Jet
Handle	standard G.U. BKS
Finishing	wood white (S 0502-Y), special colour or unfinished. Aluminium tone RAL9010 or according to colour card.
Extras	glued or between glass bar



FA02

It is possible to get special solutions. More information from the representative.

vau.ee

VILJANDI
windows · doors

WOODEN-ALUMINIUM BALCONY DOOR TKO3D

TKO3D

min/max width x height

	M7	M8	M9	M10
M19				
M20				
M21				
M22				

recommended size range

FA02

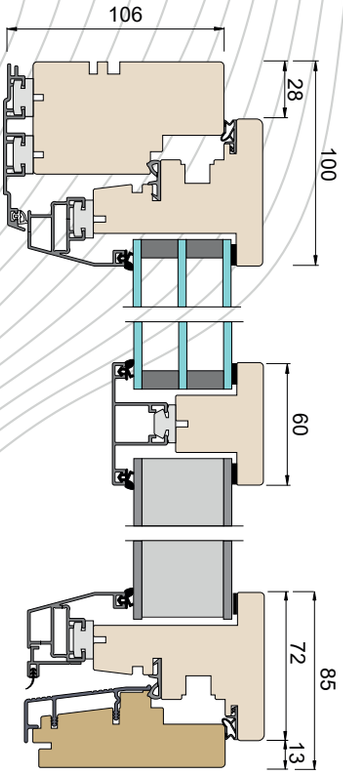

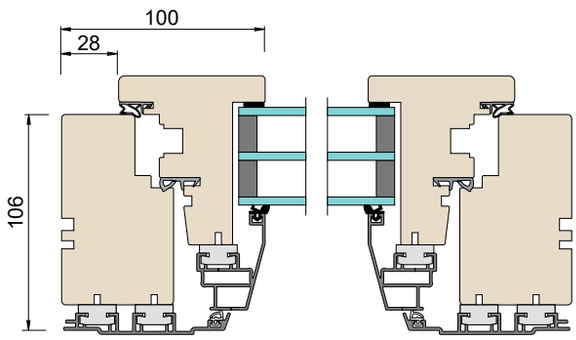

vau.ee

MS FB01

MSE FB02

MSE balcony door FB03

FB

Inward opening double frame wooden windows and balcony doors

table of contents

VILJANDI windows · doors

VILJANDI windows · doors

WOODEN WINDOW MS

Inward opening double framed wooden window.

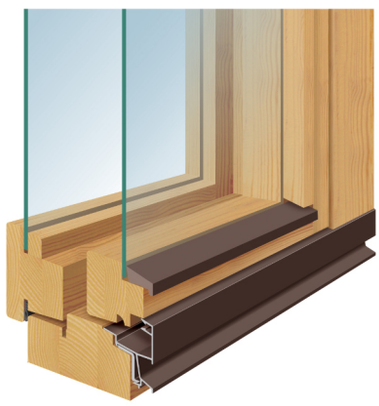

Air permeability Class 4



FB01

TECHNICAL DATA

Size	380–1380 x 380–1380mm
Construction	double frame
Opening	opens for cleaning
Frame	pine, depth 92mm
Glass	3mm glass in inner and outer frame
Fittings	bolthinges
Finishing	unfinished
Extras	glued glazing bars

It is possible to get special solutions. More information from the representative.

VILJANDI
windows · doors

WOODEN WINDOW MS

MS

min/max width x height

	M4	M5	M6	M7	M8	M9	M10	M11	M12	M13	M14
M4											
M5											
M6											
M7											
M8											
M9											
M10											
M11											
M12											
M13											
M14											

recommended size range

FB01

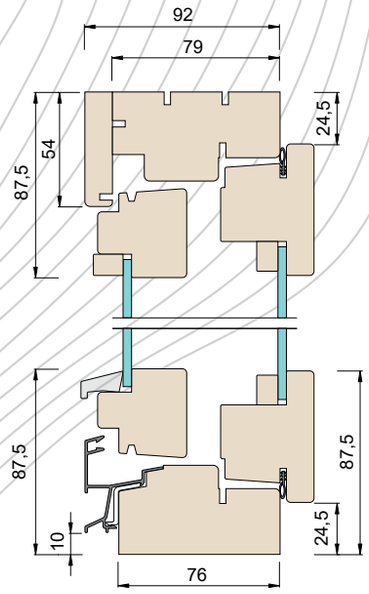

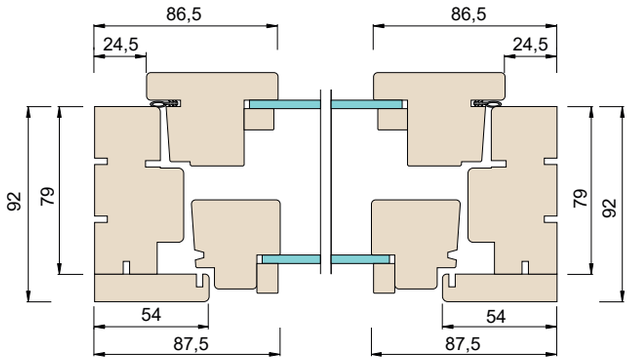

vau.ee

VILJANDI windows · doors

WOODEN WINDOW MSE

Inward opening double framed wooden window.



Airability Class 4

TECHNICAL DATA



FB02

Size	320-2300 x 320-2500mm maximum sash size 4m²
Construction	double frame
Opening	opens for washing and ventilation
Frame	pine, depth 130,170,210mm
Glass	glass in external frame up to 6mm, double or triple glazing in the inner frame up to 42 mm thick
Fittings	lock casing for washing, long closure for ventilation
Handle	Fiskostar 501
Hinges	bolthinges
Finishing	white (S 0502-Y) special colour or unfinished or stained.
Extras	glued glazing bars, ventilation valve, mosquito net, blinds between two frames

It is possible to get special solutions. More information from the representative

VILJANDI
windows · doors

WOODEN WINDOW MSE

MSE

min/max width x height

	M4	M5	M6	M7	M8	M9	M10	M11	M12	M13	M14	M15	M16	M17	M18	M19	M20	M21	M22	M23
M4																				
M5																				
M6																				
M7																				
M8																				
M9																				
M10																				
M11																				
M12																				
M13																				
M14																				
M15																				
M16																				
M17																				
M18																				
M19																				
M20																				
M21																				
M22																				
M23																				
M24																				
M25																				

Difficulties with opening

support while opening

recommended size range

FB02

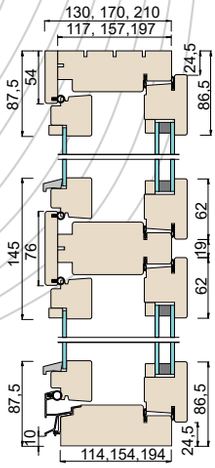

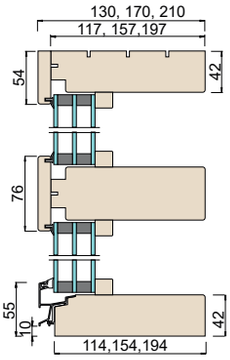

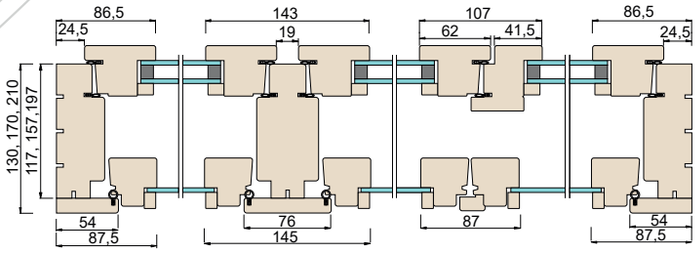



vau.ee

VILJANDI windows · doors

WOODEN BALCONY DOOR MSE

Inward opening double framed balcony door.



Air permeability Class 4

TECHNICAL DATA



Size	680-880 x 1880-2180mm
Construction	double frame
Opening	side opening
Frame	pine, depth 130,170,210mm
Glass	glass in outer sash 6mm, double or triple glazing in inner sash up to 42 mm thick, depends of sash thickness
Fittings	long closure Abloy
Handle	Fiskostar 501
Finishing	white (S 0502-Y), special color, unfinished or stained
Extras	glued glazing bars, blinds

FB03

It is possible to get special solutions. More information from the representative.

VILJANDI
windows · doors

WOOD BALCONY DOOR MSE

FB03

MSE one sided

	M7	M8	M9
M19			
M20			
M21			
M22			

MSE double sided

	M14	M15	M16	M17	M18
M19					
M20					
M21					
M22					

min/max width x height

recommended size range

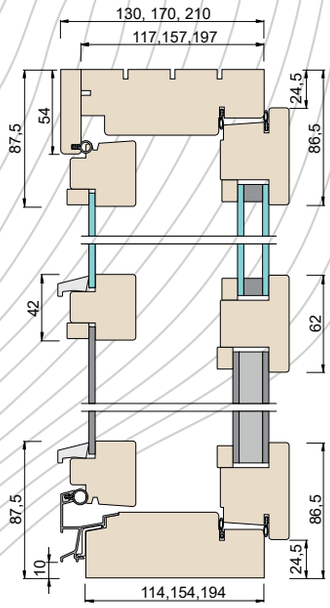

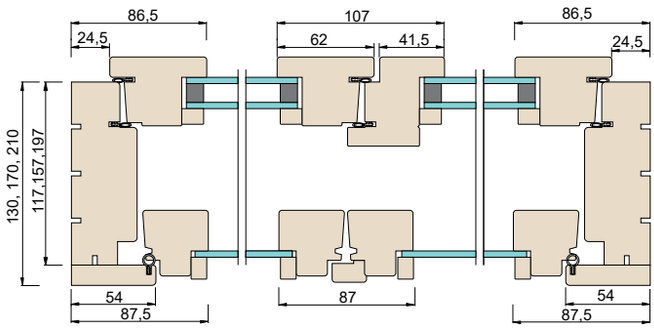

vau.ee

MSEAL FC01
MSEAL balcony door FC02
MSEAL-A FC03
MSEAL-A balcony door FC04
MSEAL-B FC05
MSEAL-B balcony door FC06
TKO 2+1 FC07
TKO 2+1 balcony door FC08
TKO 3+1 FC09
TKO 3+1 balcony door FC10
MEKAL FC11

FC

Inward opening double frame wooden-aluminium windows and balcony doors

table of contents

VILJANDI windows · doors

VILJANDI windows · doors

WOODEN-ALUMINIUM WINDOW MSEAL

Inward opening double framed wooden-aluminium window.



Water tightness	Class 9A
Sound insulation	Rw44dB
Air permeability	Class 4
Resistance to wind load	Class C3
Thermal transmittance	1,2-1,1 W/m²K



FC01

TECHNICAL DATA

Size	320-2300 x 320-2500mm maximum sash size 4m²
Construction	double framed
Opening	opens for washing and ventilation
Frame	pine, depth 130,170,210mm
Glass	glass in outer sash up to 6mm, double glazing in inner sash up to 22mm thick
Fittings	locking case for washing, long closure for ventilation
Hinges	bolthinges
Finishing	wood white (S 0502-Y), special colour, unfinished or stained. Aluminium tone RAL9010 or according to colour card
Extras	glued glazing bars, ventilation valve, mosquito net, blinds between sashes

It is possible to get special solutions. More information from the representative.

VILJANDI windows · doors

WOODEN-ALUMINIUM WINDOW MSEAL

MSEAL

min/max width x height

	M4	M5	M6	M7	M8	M9	M10	M11	M12	M13	M14	M15	M16	M17	M18	M19	M20	M21	M22	M23
M4																				
M5																				
M6																				
M7																				
M8																				
M9																				
M10																				
M11																				
M12																				
M13																				
M14																				
M15																				
M16																				
M17																				
M18																				
M19																				
M20																				
M21																				
M22																				
M23																				
M24																				
M25																				

- difficulties with opening
- support while opening
- recommended size range

FC01

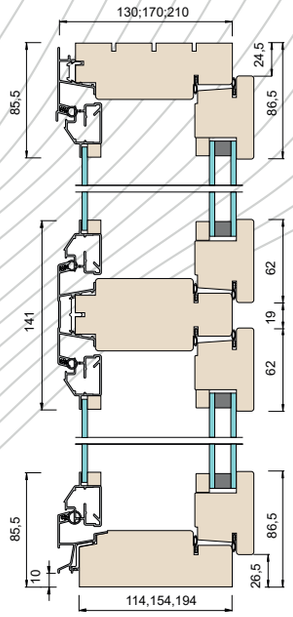

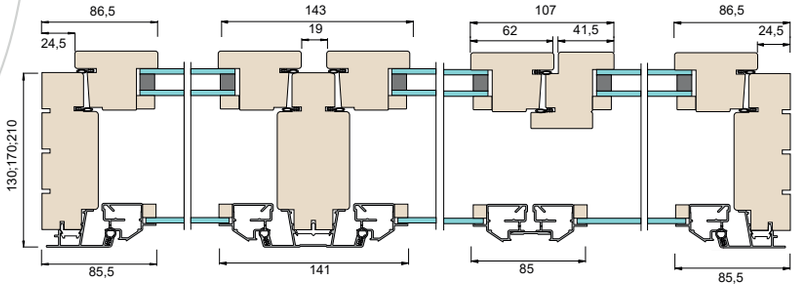

vau.ee

VILJANDI windows · doors

WOODEN-ALUMINIUM BALCONY DOOR MSEAL

Inward opening double framed wooden-aluminium balcony door.



Air permeability Class 4

TECHNICAL DATA

Size	680-880 x 1880-2180mm
Construction	double frame
Opening	side opening
Frame	pine, depth 130,170, 210mm
Glass	glass in outer sash up to 6 mm, double glazing in inner sash up to 22mm
Fittings	long closure Abloy
Handle	Fiskostar 501
Finishing	wood white (S 0502-Y), special colour, unfinished or stained. Aluminium tone RAL9010 or according to colour card.
Extras	glued glazing bars, blinds



FC02

It is possible to get special solutions. More information from the representative.

vau.ee

VILJANDI
windows · doors

WOODEN-ALUMINIUM BALCONY DOOR MSEAL

FC02

MSEAL one sided

	M7	M8	M9
M19			
M20			
M21			
M22			

MSEAL double sided

	M14	M15	M16	M17	M18
M19					
M20					
M21					
M22					

min/max width x height

remended size rangcome

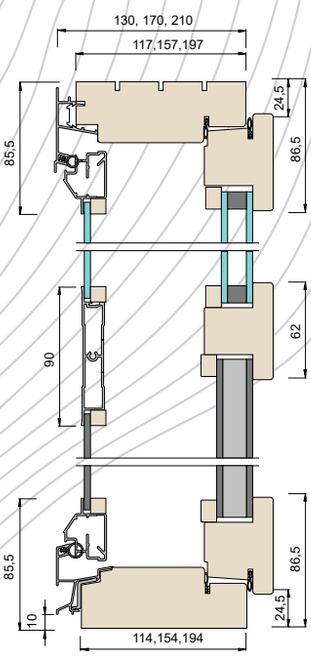

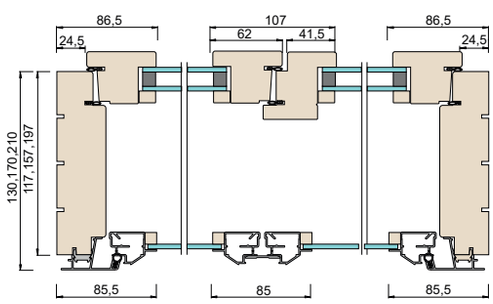

vau.ee

VILJANDI windows · doors

WOODEN-ALUMINIUM WINDOW MSEAL-A

Inward opening double framed wooden-aluminium window.



Water tightness	Class 9A
Sound insulation	Rw46-52dB
Air permeability	Class 4
Resistance to wind load	Class C3
Thermal transmittance	0,77-0,70W/m²K

TECHNICAL DATA



FC03

Size	320-2300 x 320-2500mm maximum aperture area 4m²
Construction	double frame
Opening	opens for washing and ventilation
Frame	pine, depth 130,170,210mm
Glass	glass in outer sash up to 6mm, triple glazing in inner sush up to 42mm
Fittings	locking case for washing, long closure for ventilation
Hinges	bolthinges
Finishing	wood white (S 0502-Y), special color, unfinished or stained. Aluminum tone RAL9010 or according to color card
Extras	glued glazing bars, ventilation valve, mosquito net, blinds between sashes

It is possible to get special solutions. More information from the representative.

VILJANDI windows · doors

WOODEN-ALUMINIUM WINDOW MSEAL-A

MSEAL-A

min/max width x height

	M4	M5	M6	M7	M8	M9	M10	M11	M12	M13	M14	M15	M16	M17	M18	M19	M20	M21	M22	M23
M4																				
M5																				
M6																				
M7																				
M8																				
M9																				
M10																				
M11																				
M12																				
M13																				
M14																				
M15																				
M16																				
M17																				
M18																				
M19																				
M20																				
M21																				
M22																				
M23																				
M24																				
M25																				

difficulties with opening

support while opening

recommended size range

FC03

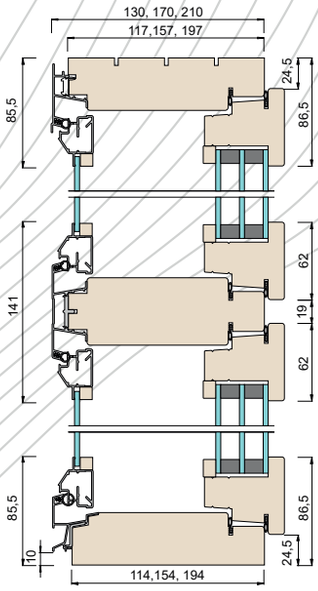

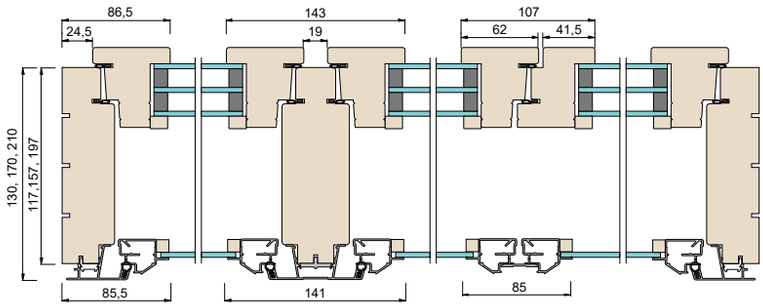

vau.ee

VILJANDI windows · doors

WOODEN-ALUMINIUM BALCONY DOOR MSEAL-A

Inward opening double framed wooden-aluminium balcony door.



Air permeability Class 4

TECHNICAL DATA



Size	680-880 x 1880-2180mm
Construction	double frame
Opening	side opening
Frame	pine, depth 130,170,210mm
Glass	glass in outer sash up to 6mm, triple glazing in the inner sush up to 42mm
Fittings	long closure Abloy
Handle	Fiskostar 501
Finishing	wood white (S 0502-Y), special color, unfinished or stained. Aluminum tone RAL9010 or according to color card
Extras	glued glazing bars, blinds

FC04

It is possible to get special solutions. More information from the representative.

VILJANDI windows · doors

WOODEN-ALUMINIUM BALCONY DOOR MSEAL-A

FC04

MSEAL-A one sided

	M7	M8	M9
M19			
M20			
M21			
M22			

MSEAL-A double sided

	M14	M15	M16	M17	M18
M19					
M20					
M21					
M22					

min/max width x height

recommended size range

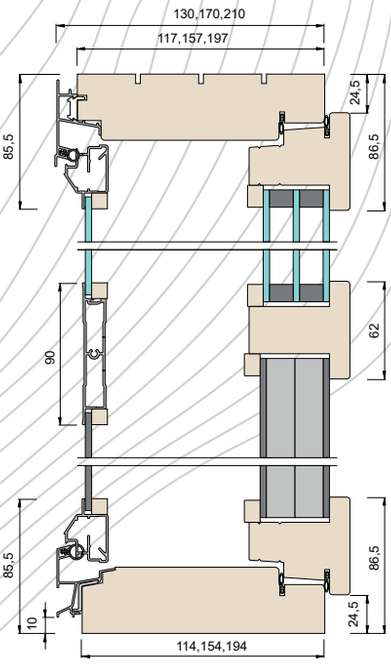

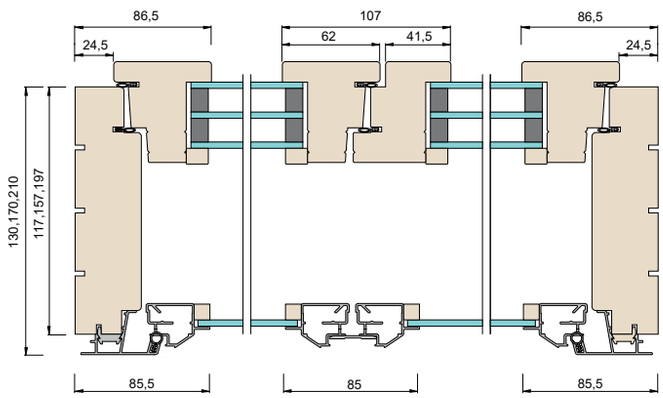

vau.ee

VILJANDI windows · doors

WOODEN-ALUMINIUM WINDOW MSEAL-B

Inward opening double framed wooden-aluminium window.



Water tightness	Class 9A
Sound insulation	Rw45-52dB
Air permeability	Class 4
Resistance to wind load	Class C3
Thermal transmittance	1,1-0,98W/m²K

TECHNICAL DATA

Size	320-2300 x 320-2500mm maximum sash size 4m²
Construction	double frame
Opening	opens for washing and ventilation
Frame	pine, depth 130,170,210mm
Glass	glass in outer sash up to 6mm, double glazing in the inner sash up to 34mm
Fittings	locking case for washing, long closure for ventilation
Handle	Fiskostar 501
Hinges	bolthinges
Finishing	wood white (S 0502-Y), special color, unfinished or stained. Aluminum tone RAL9010 or according to color card
Extras	glued glazing bars, ventilation valve, mosquito net, blinds between sashes

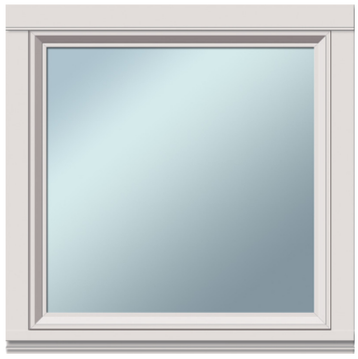

FC05

It is possible to get special solutions. More information from the representative.

vau.ee

VILJANDI windows · doors

WOODEN-ALUMINIUM WINDOW MSEAL-B

MSEAL-B

min/max width x height

	M4	M5	M6	M7	M8	M9	M10	M11	M12	M13	M14	M15	M16	M17	M18	M19	M20	M21	M22	M23
M4																				
M5																				
M6																				
M7																				
M8																				
M9																				
M10																				
M11																				
M12																				
M13																				
M14																				
M15																				
M16																				
M17																				
M18																				
M19																				
M20																				
M21																				
M22																				
M23																				
M24																				
M25																				

difficulties with opening

support while opening

recommended size range

FC05

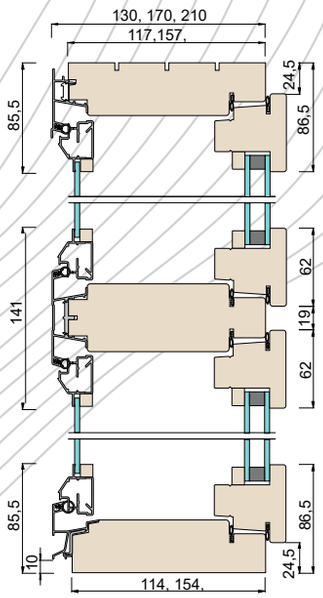

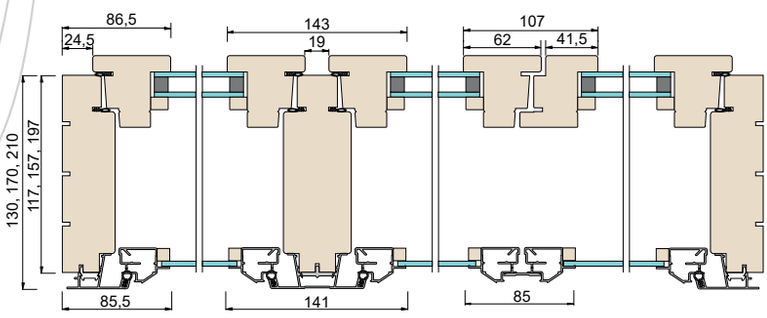

vau.ee

VILJANDI windows · doors

WOODEN-ALUMINIUM BALCONY DOOR MSEAL-B

Inward opening double framed wooden-aluminium balcony door.



Air permeability Class 4

TECHNICAL DATA



Size	680-880 x 1880-2180mm
Construction	double frame
Opening	side opening
Frame	pine, depth 130,170,210mm
Glass	glass in outer sash up to 6mm, double glazing in inner sash up to 34mm
Fittings	long closure Abloy
Handle	Fiskostar 501
Finishing	wood white (S 0502-Y), special color, unfinished or stained. Aluminium tone RAL9010 or according to colour card
Extras	glued glazing bars, blinds

FC06

It is possible to get special solutions. More information from the representative.

VILJANDI
windows · doors

WOODEN-ALUMINIUM BALCONY DOOR MSEAL-B

FC06

MSEAL-B one sided

	M7	M8	M9
M19			
M20			
M21			
M22			

MSEAL-B double sided

	M14	M15	M16	M17	M18
M19					
M20					
M21					
M22					

min/max width x height

recommended size range

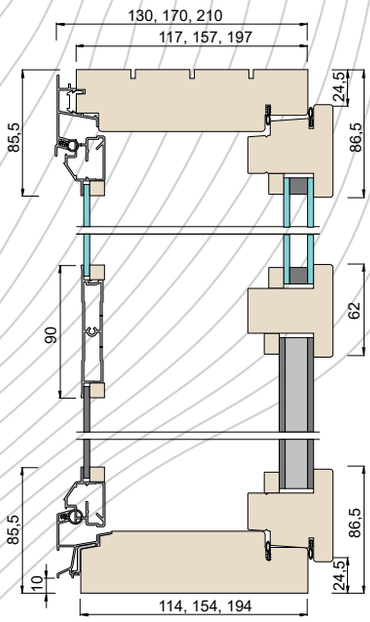

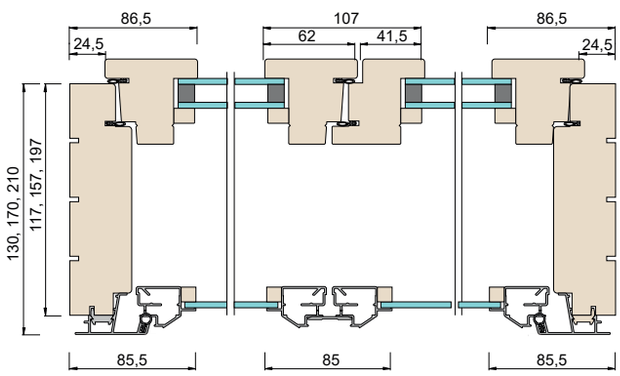

vau.ee

VILJANDI windows · doors

WOODEN-ALUMINIUM WINDOW TKO 2+1

Inward opening double framed wooden-aluminium window.



Water tightness	Class 9A
Sound insulation	Rw39-46dB
Air permeability	Class 4
Resistance to wind load	Class C3
Thermal transmittance	1,0-0,84 W/m²K

FC07

TECHNICAL DATA

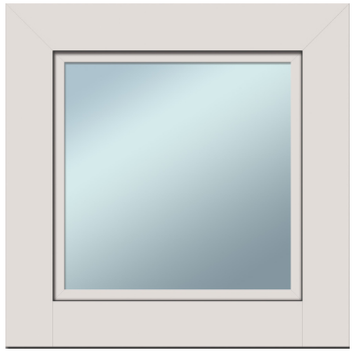

Size	480-1280 x 480-2080mm
Construction	double frame
Opening	tilt before turn, tilt and turn side opening
Frame	pine, depth 106mm
Glass	glass in outer sash up to 8 mm, double glazing in inner sash up to 24mm
Fittings	G.U Uni-Jet
Handle	Hoppe
Finishing	wood white (S 0502-Y), special color or stained. Aluminium tone RAL9010 or according to colour card
Extras	glued glazing bars, ventilation valve, blinds between sashes

It is possible to get special solutions. More information from the representative.

VILJANDI
windows · doors

WOODEN-ALUMINIUM WINDOW
TKO 2+1

TKO2+1

min/max width x height

	M4	M5	M6	M7	M8	M9	M10	M11	M12	M13	M14	M15	M16
M5													
M6													
M7													
M8													
M9													
M10													
M11													
M12													
M13													
M14													
M15													
M16													
M17													
M18													
M19													
M20													
M21													

- difficulties with opening
- details too short for line production
- support while opening
- recommended size range

FC07

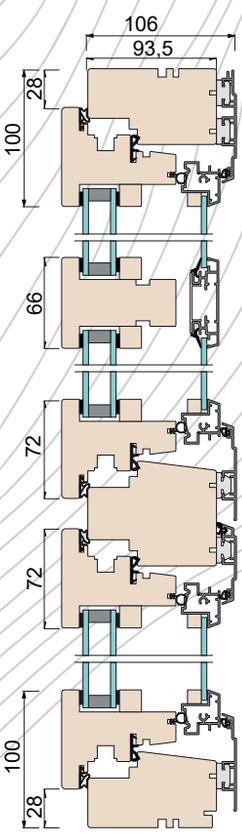

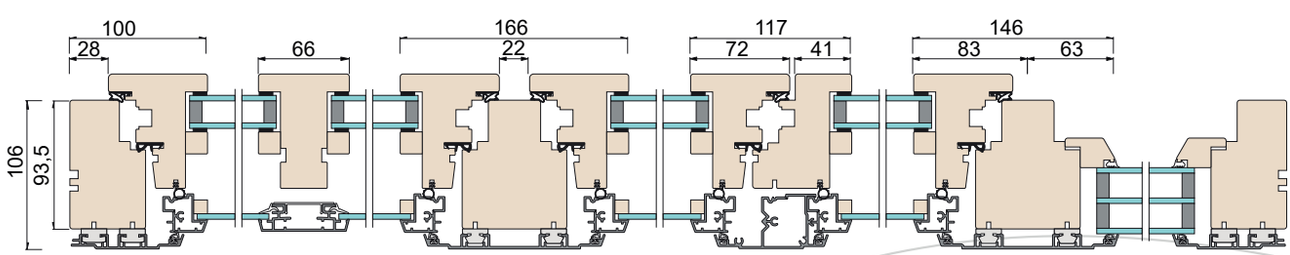

vau.ee

VILJANDI windows · doors

WOODEN-ALUMINIUM BALCONY DOOR TKO 2+1

Inward opening double framed wooden-aluminum balcony door.



Water tightness	Class 9A
Air permeability	Class 4
Resistance to wind load	Class C5
Thermal transmittance	1,1-1,0 W/m²K

TECHNICAL DATA



Size	680-980 x 1890-2180mm
Construction	double frame
Opening	side opening
Frame	pine, depth 106mm
Glass	glass in outer sash up to 8mm inner sash double glazing up to 24mm thick
Fittings	G.U Uni-Jet
Handle	Hoppe
Finishing	wood white (S 0502-Y), special colour or unfinished or stained. Aluminium tone RAL9010 or according to colour card
Extras	blinds between sashes, glued glazing bars

FC08

It is possible to get special solutions. More information from the representative.

vau.ee

VILJANDI
windows · doors

WOODEN-ALUMINIUM BALCONY DOOR TKO 2+1

FC08

TKO 2+1

min/max width x height

	M7	M8	M9	M10
M19				
M20				
M21				
M22				

recommended size range







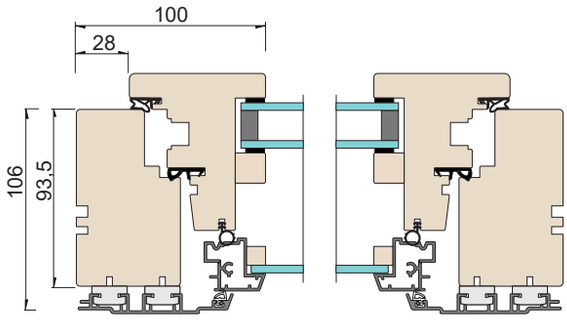

vau.ee

20211029

VILJANDI windows · doors

WOODEN-ALUMINIUM WINDOW TKO 3+1

Inward opening double framed wooden-aluminum window.



Water tightness	Class 9A
Sound insulation	Rw38-42dB
Air permeability	Class 4
Resistance to wind load	Class C3
Thermal transmittance	0,71-0,68 W/m²K

FC09

TECHNICAL DATA



Size	480-1280 x 480-2080mm
Construction	double frame
Opening	inward, tilt-turn
Frame	pine, depth 106mm
Glass	glass in outer sash up to 6mm triple glazing in inner sash up to 48mm thick
Fittings	G.U Uni-Jet
Handle	Hoppe
Finishing	wood white (S 0502-Y), special colour, unfinished or stained. Aluminium tone RAL9010 or according to colour card
Extras	ventilation valve, glued glazing bars

It is possible to get special solutions. More information from the representative.

VILJANDI
windows · doors

WOODEN-ALUMINIUM WINDOW TKO 3+1

TKO3+1

min/max width x height

	M4	M5	M6	M7	M8	M9	M10	M11	M12	M13	M14	M15	M16
M5													
M6													
M7													
M8													
M9													
M10													
M11													
M12													
M13													
M14													
M15													
M16													
M17													
M18													
M19													
M20													
M21													

- difficulties with opening
- details too short for line production
- support while opening
- recommended size range

FC09

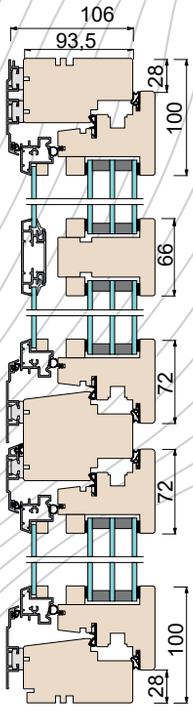

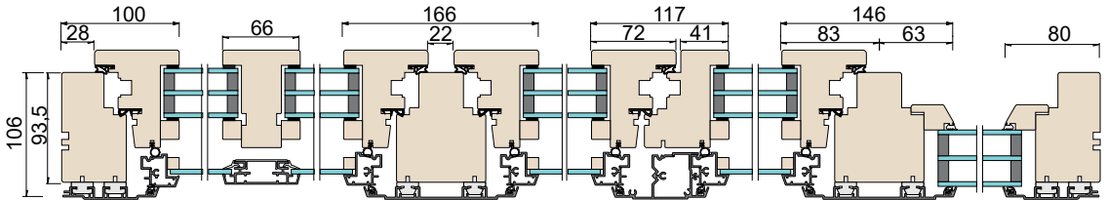

vau.ee

VILJANDI windows · doors

WOODEN-ALUMINIUM BALCONY DOOR TKO 3+1

Inward opening double framed wooden-aluminum balcony door.

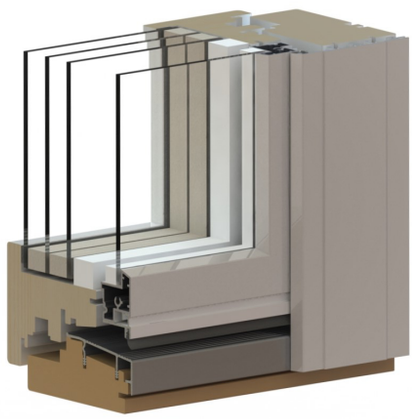

Air permeability Class 4

TECHNICAL DATA



Size	680-980 x 1890-2180mm
Construction	double frame
Opening	side opening
Frame	pine, depth 106mm
Glass	glass in outer sash up to 6mm, in inner sash triple glazing up to 48mm thick
Fittings	G.U Uni-Jet
Handle	Hoppe
Finishing	wood white (S 0502-Y), special colour, unfinished or stained. Aluminium tone RAL9010 or according to colour card
Extras	glued glazing bars

FC10

It is possible to get special solutions. More information from the representative.

VILJANDI
windows · doors

WOODEN-ALUMINIUM BALCONY DOOR TKO 3+1

TKO 3+1

min/max width x height

	M7	M8	M9	M10
M19				
M20				
M21				
M22				

recommended size range

FC10

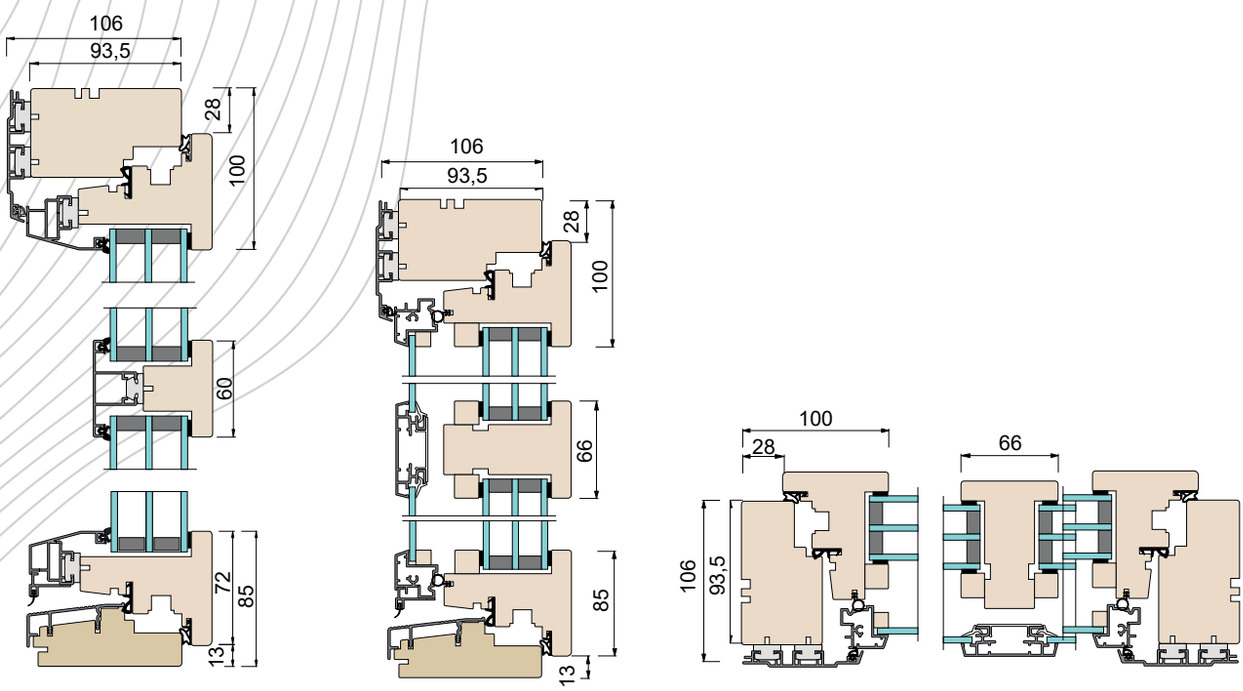

vau.ee

VILJANDI windows · doors

WOODEN-ALUMINIUM WINDOW MEKAL

Fixed wooden-aluminium window.

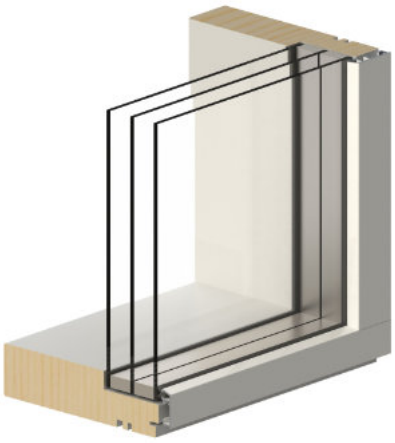

Water tightness	E750
Sound insulation	Rw34-37dB
Air permeability	Class 4
Resistance to wind load	Class C3
Thermal transmittance	0,52-0,47W/m²K (glass)

FC11

TECHNICAL DATA

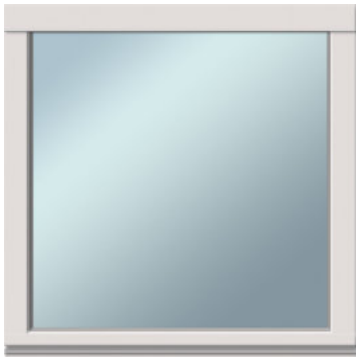

Size	350-3000 x 350-3000mm maximum sash size 5m²
Construction	fixed
Frame	pine, depth 130,170,210mm
Glass	triple glazing, thickness 52mm
Finishing	wood white (S 0502-Y), special color, unfinished or stained. Aluminum tone RAL9010 or according to color card
Extras	glued glazing bars, blinds

It is possible to get special solutions. More information from the representative.

VILJANDI windows · doors

WOODEN-ALUMINIUM WINDOW MEKAL

MEKAL

min/max width x height

allowed sizes

not allowed sizes

	M4	M5	M6	M7	M8	M9	M10	M11	M12	M13	M14	M15	M16	M17	M18	M19	M20	M21	M22	M23	M24	M25	M26	M27	M28	M29	M30
M4																											
M5																											
M6																											
M7																											
M8																											
M9																											
M10																											
M11																											
M12																											
M13																											
M14																											
M15																											
M16																											
M17																											
M18																											
M19																											
M20																											
M21																											
M22																											
M23																											
M24																											
M25																											
M26																											
M27																											
M28																											
M29																											
M30																											

FC11

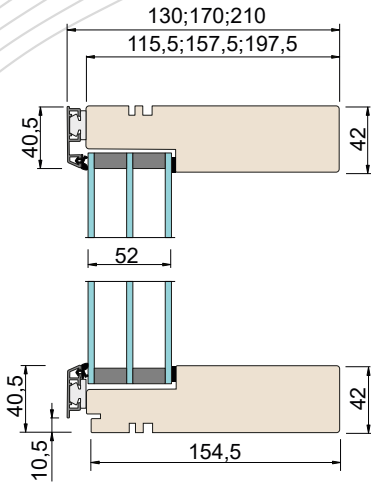

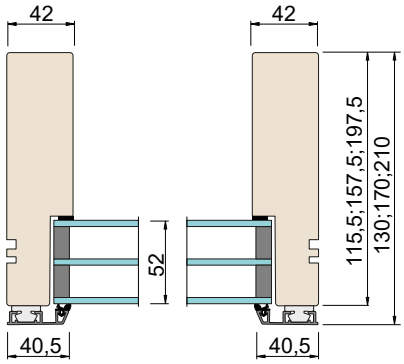

vau.ee

VDF FD01

VHD balcony door FD02

VHE FD03

VHDE balcony door FD04

FD

Outward opening single frame wooden windows and balcony doors

table of contents

VILJANDI windows · doors

VILJANDI windows · doors

WOODEN WINDOW VDF

Outward opening frame wooden window.

Water tightness	Class 7A
Air permeability	Class 4
Resistance to wind load	Class C4
Thermal transmittance	1,3–1,2 W/m²K



TECHNICAL DATA



Size	480–1080 x 480–1280mm
Construction	single frame
Opening	side opening
Frame	pine, depth 103mm
Glass	double-glazed, thickness 23mm
Handle	finger lock
Hinges	1228
Finishing	white (S 0502-Y), special colour, unfinished or stained
Extras	removable, glued or between glass bars

FD01

It is possible to get special solutions. More information from the representative.

vau.ee

VILJANDI windows · doors

WOODEN WINDOW VDF

FD01

VDF-1

	M5	M6	M7	M8	M9	M10	M11	M12
M5								
M6								
M7								
M8								
M9								
M10								
M11								
M12								
M13								

VDF-2

	M10	M11	M12	M13	M14
M5					
M6					
M7					
M8					
M9					
M10					
M11					
M12					
M13					
M14					

VDF-3

	M15	M16	M17	M18
M5				
M6				
M7				
M8				
M9				
M10				
M11				
M12				
M13				
M14				

min/max width x height

- opening upwards
- difficulties with opening
- opening to the side

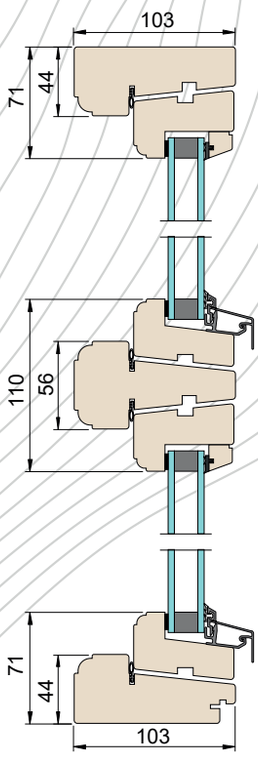

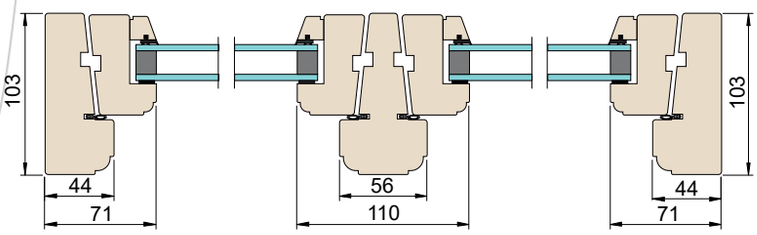

vau.ee

VILJANDI windows · doors

WOODEN BALCONY DOOR VHD

Outward opening single frame VHD wooden balcony door.

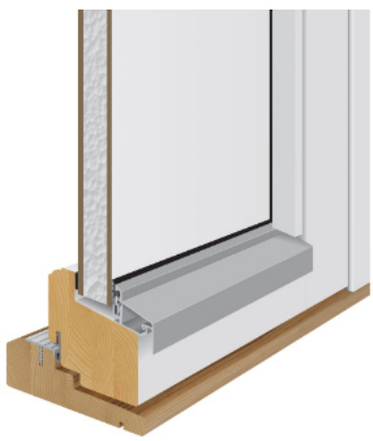

Water tightness	Class 9A
Air permeability	Class 4
Resistance to wind load	Class C3
Thermal transmittance	1,4–1,3 W/m²K

TECHNICAL DATA

Size	580–880 x 1880–2180mm
Construction	single frame
Opening	side opening
Frame	pine, depth 105mm
Glass	double-glazed, thickness 26mm
Fittings	Assa 846F long lock that can be locked from the handle, with opening stopper
Handle	Fix 7314
Hinges	3248-110TMKS
Finishing	white (S 0502-Y), special color, unfinished or stained
Extras	removable, glued and/or glass dividing bars



FD02

It is possible to get special solutions. More information from the representative.

vau.ee

VILJANDI
windows · doors

WOODEN BALCONY DOOR VHD

FD02

VHD one sided

	M6	M7	M8	M9
M19				
M20				
M21				
M22				

VHD double sided

min/max width x height

	M10	M11	M12	M13	M14	M15	M16	M17	M18
M20									
M21									
M22									

difficulties with opening

recommended size range

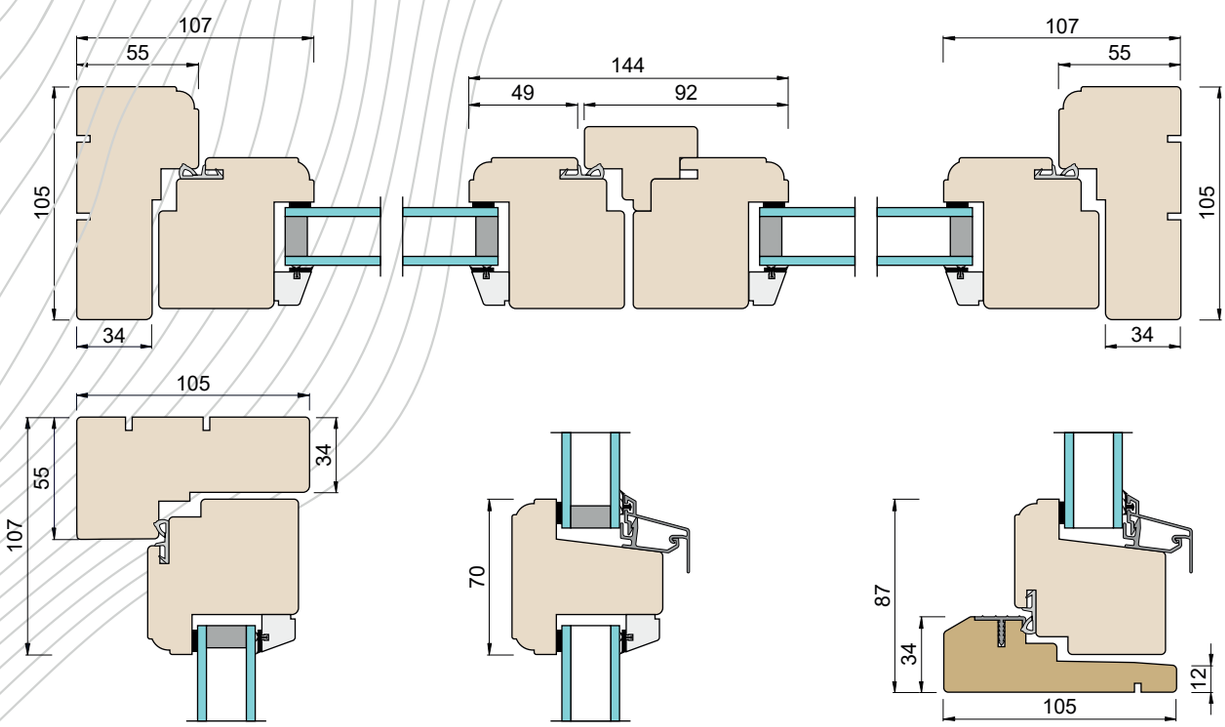

vau.ee

VILJANDI windows · doors

WOODEN WINDOW VHE



Outward opening single frame wooden window.

Water tightness	Class 9A
Air permeability	Class 4
Resistance to wind load	Class C3
Thermal transmittance	1,3-0,86W/m²K

TECHNICAL DATA



FD03

Size	480-1780 x 480-1580mm
Construction	single frame
Opening	top hung, side opening, fixed, side swing opening projecting top hung
Frame	pine, depth 106mm
Glass	triple-glazed, thickness 42mm
Fittings	ASSA Allswing
Handle	Hoppe
Finishing	wood white (S 0502-Y), special colour, unfinished or stained
Extras	glued, removable or between glass bars ventilation valve, blinds

It is possible to get special solutions. More information from the representative.

VILJANDI windows · doors

WOODEN WINDOW VHE

FD03

VHE

min/max width x height

	M5	M6	M7	M8	M9	M10	M11	M12	M13	M14	M15	M16	M17	M18
M5														
M6														
M7														
M8														
M9														
M10														
M11														
M12														
M13														
M14														
M15														
M16														

difficulties with opening

recommended size range

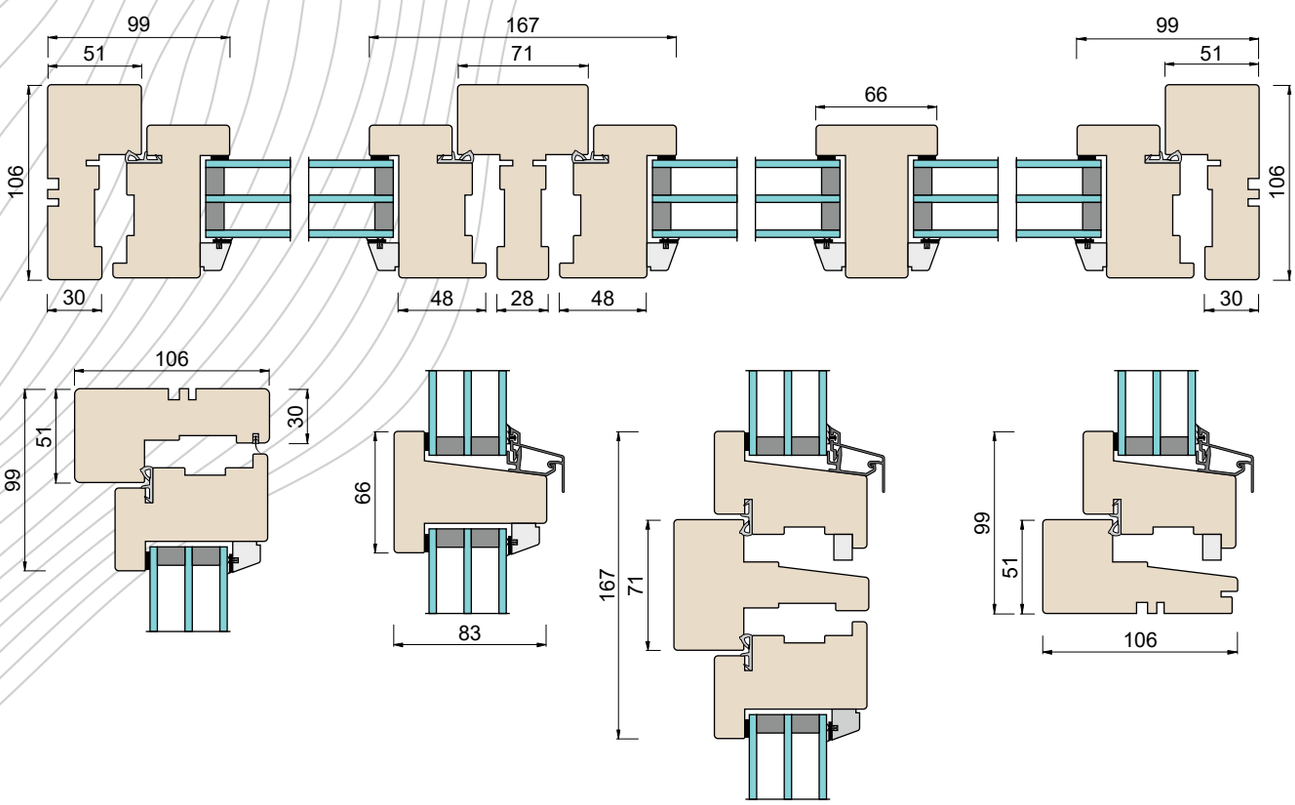

vau.ee

VILJANDI windows · doors

WOODEN BALCONY DOOR VHDE

Outward opening single frame wooden balcony door.

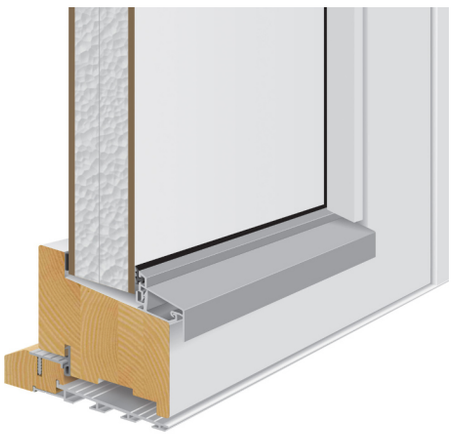

Water tightness	Class 9A
Air permeability	Class 4
Resistance to wind load	Class C5
Thermal transmittance	1,1–0,92 W/m²K

TECHNICAL DATA



Size	680–980 x 1880–2180mm
Construction	single frame
Opening	side opening
Frame	pine, depth 106mm
Glass	triple-glazed, thickness 42–44mm
Fittings	lock FIX846F and striking plate FIX3981. Lockable by the stopper handle
Handle	Hoppe
Hinges	ASSA 3219
Finishing	white (S 0502-Y), special color, unfinished or stained
Extras	removable and glass dividing glazing bars

FD04

It is possible to get special solutions. More information from the representative.

vau.ee

VILJANDI windows · doors

WOODEN BALCONY DOOR VHDE

VHDE one sided

	M7	M8	M9	M10
M19				
M20				
M21				
M22				

VHDE double sided

	M12	M13	M14	M15	M16	M17	M18
M20							
M21							
M22							

min/max width x height

difficulties with opening

recommended size range

FD04

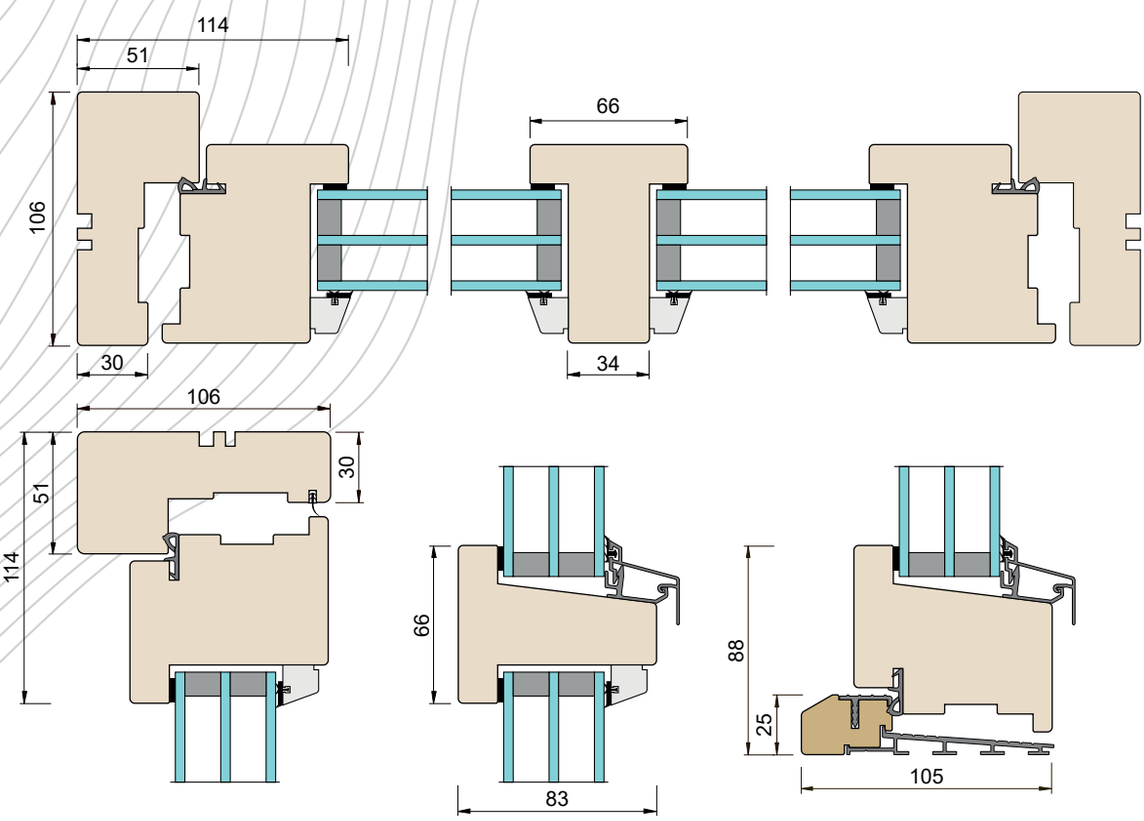

vau.ee

VHSAL FE01

VHDSAL balcony door FE02

VHTAL FE03

VHDCAL balcony door FE04

TSAAL FE05

TSADAL balcony door FE06

POAL balcony door FE07

POALv01 balcony door FE08

FE

Outward opening single frame wood-aluminium windows and balcony doors

table of contents

VILJANDI windows · doors

VILJANDI windows · doors

WOODEN-ALUMINIUM WINDOW VHSAL

Outward opening single frame wooden-aluminium window.



Water tightness	Class 9A
Sound insulation	Rw30-39dB
Air permeability	Class 4
Resistance to wind load	Class C4
Thermal transmittance	1,2-0,92 W/m²K

TECHNICAL DATA



FE01

Size	480-1780 x 480-1580mm
Construction	single frame
Opening	top hung, side opening, fixed, side swing opening projecting top hung
Frame	pine, depth 106mm
Glass	triple-glazed, thickness 42mm
Fittings	ASSA allswing
Handle	Hoppe
Finishings	wood white (S 0502-Y), special colour, unfinished or stained. Aluminium tone RAL9010 or according to colour card
Extras	removable, glued or between glass bars, ventilation valve, blinds

It is possible to get special solutions. More information from the representative.

VILJANDI
windows · doors

WOODEN-ALUMINIUM WINDOW VHSAL

VHSAL

min/max width x height

	M5	M6	M7	M8	M9	M10	M11	M12	M13	M14	M15	M16	M17	M18
M5														
M6														
M7														
M8														
M9														
M10														
M11														
M12														
M13														
M14														
M15														
M16														

difficulties with opening

recommended size range

FE01

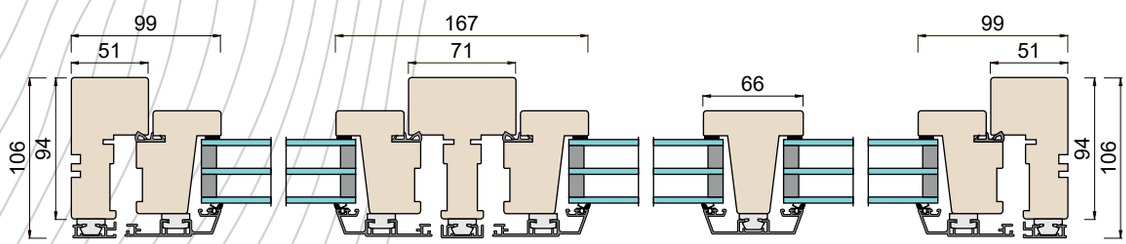

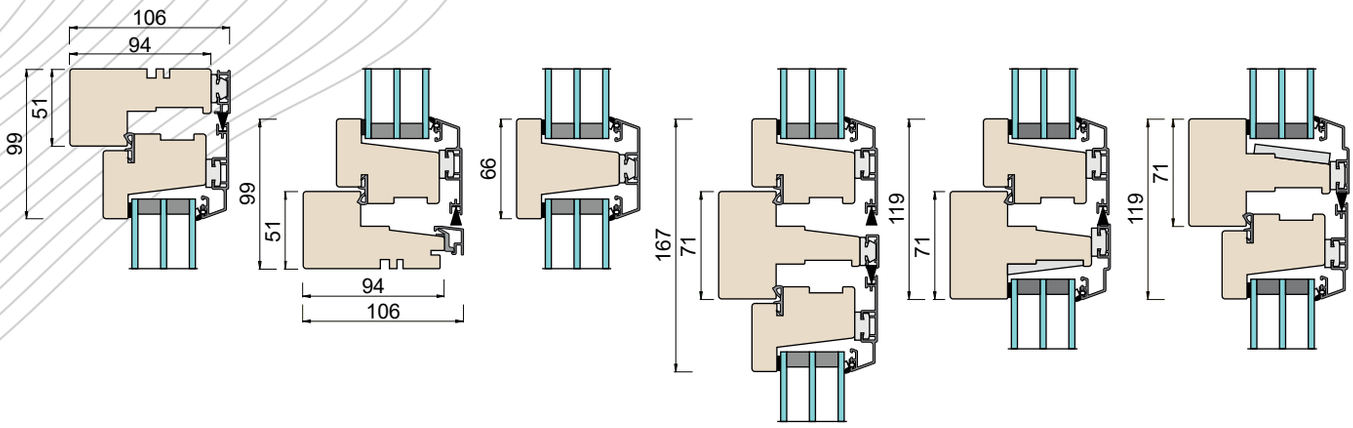

vau.ee

VILJANDI windows · doors

WOODEN-ALUMINIUM BALCONY DOOR VHDSAL

Outward opening single frame wooden-aluminium balcony door.

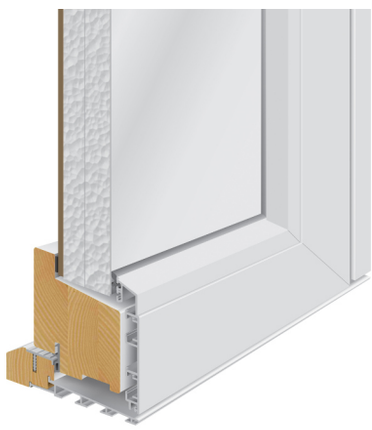

Water tightness	Class 9A
Air permeability	Class 4
Resistance to wind load	Class C5
Thermal transmittance	1,3-1,1W/m²K

FE02

TECHNICAL DATA



Size	780-1780 x 1880-2180mm
Construction	single frame
Opening	side opening
Frame	pine, depth 106mm
Glass	triple-glazed, thickness 42mm
Fittings	Assa
Handle	Hoppe
Finishing	wood white (S 0502-Y), special colour, unfinished or stained. Aluminium tone RAL9010 or according to colour card
Extras	removable or glass dividing bars

It is possible to get special solutions. More information from the representative.

VILJANDI
windows · doors

WOODEN-ALUMINIUM BALCONY DOOR VHDSAL

FE02

VHDSAL one sided

	M7	M8	M9	M10
M19				
M20				
M21				
M22				

VHDSAL double sided

	M12	M13	M14	M15	M16	M17	M18
M19							
M20							
M21							
M22							

min/max width x height

difficulties with opening

opening to the side

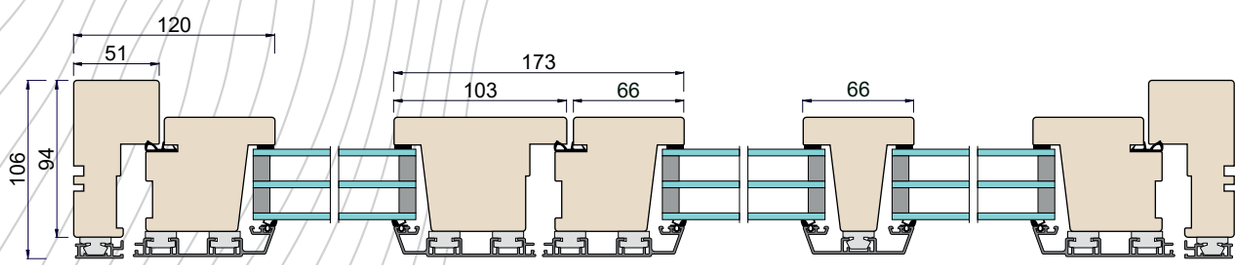







VILJANDI windows · doors

WOODEN-ALUMINIUM WINDOW VHTAL

Outward opening single frame wooden-aluminium window.



Water tightness	Class 9A
Air permeability	Class C3
Resistance to wind load	Class C4
Thermal transmittance	1,3-1,2 W/m²K

TECHNICAL DATA



Size	480-980 x 480-1580mm
Construction	single frame
Opening	side opening
Frame	pine, depth 118,5mm
Glass	double-glazed, thickness 26mm
Fittings	finger lock VM280
Hinges	1228
Finishing	wood white (S 0502-Y), special colour, unfinished or stained. Aluminium tone RAL9010 or according to colour card
Extras	dividing, removable or between glass bars

FE03

It is possible to get special solutions. More information from the representative.

VILJANDI
windows · doors

WOODEN-ALUMINIUM WINDOW VHTAL

FE03

VHTAL

min/max width x height

	M5	M6	M7	M8	M9	M10
M5						
M6						
M7						
M8						
M9						
M10						
M11						
M12						
M13						
M14						
M15						
M16						

difficulties with opening

opening to the side

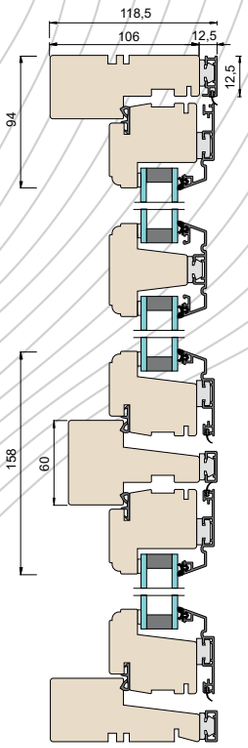

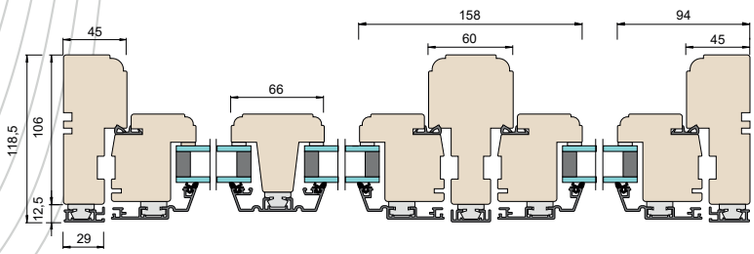

vau.ee

VILJANDI windows · doors

WOODEN-ALUMINIUM BALCONY DOOR VHDCAL

Outward opening single frame wooden-aluminum balcony door.

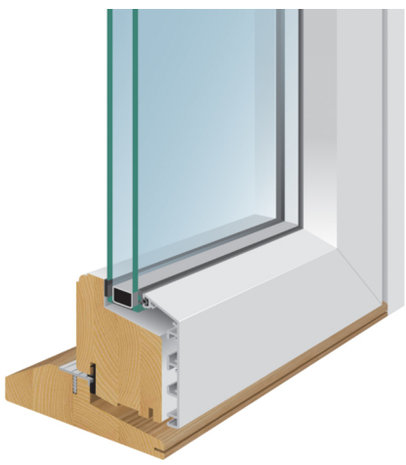

Water tightness	Class 9A
Air permeability	Class 4
Resistance to wind load	Class C3

TECHNICAL DATA



Size	680-980 x 1880-2180mm
Construction	single frame
Opening	side opening
Frame	pine, depth 118,5mm
Glass	double-glazed, thickness 26mm
Fittings	Assa
Handle	Hoppe
Finishing	wood white (S 0502-Y), special colour, unfinished or stained. Aluminium tone RAL9010 or according to colour card
Extras	removable or between glass bars

FE04

It is possible to get special solutions. More information from the representative.

vau.ee

VILJANDI
windows · doors

WOODEN-ALUMINIUM BALCONY DOOR VHDCAL

FE04

VHDCAL

min/max width x height

	M7	M8	M9	M10
M19				
M20				
M21				
M22				

difficulties with opening

opening to the side

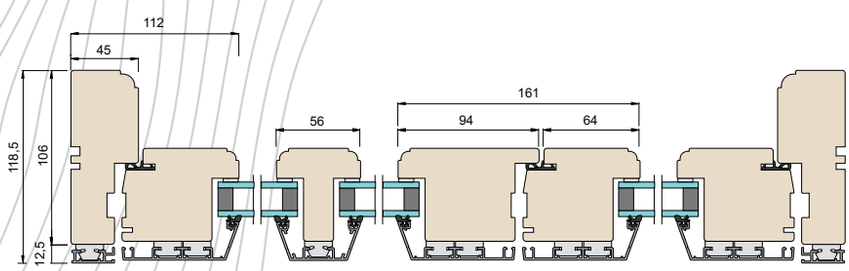

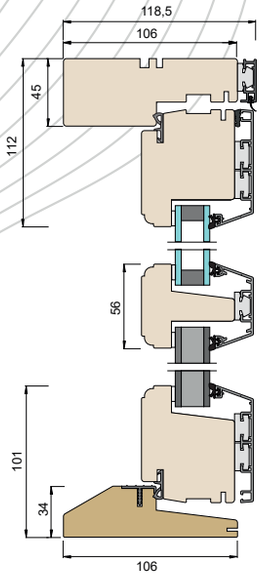

vau.ee

VILJANDI windows · doors

WOODEN-ALUMINIUM WINDOW TSAAL

Outward opening single frame wooden-aluminium window.

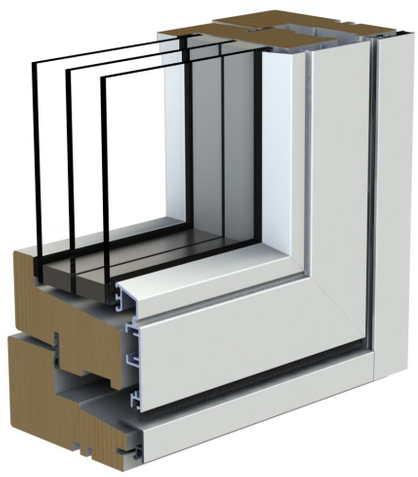

Water tightness	Class 9A
Sound insulation	Rw32-45dB
Air permeability	Class 4
Resistance to wind load	Class C4
Thermal transmittance	0,79-0,75 W/m²K

TECHNICAL DATA



FE05

Size	480-1580 x 580-1580mm
Construction	single frame
Opening	projecting top hung
Frame	pine, depth 106mm
Glass	triple-glazed, thickness 57mm
Fittings	ASSA allswing
Handle	Hoppe
Finishing	wood white (S 0502-Y), special colour, unfinished or stained. Aluminium tone RAL9010 or according to colour card
Extras	removable or between glass bars, blinds, ventilation valve

It is possible to get special solutions. More information from the representative.

VILJANDI
windows · doors

WOODEN-ALUMINIUM WINDOW TSAAL

TSAAL

min/max width x height

	M5	M6	M7	M8	M9	M10	M11	M12	M13	M14	M15	M16
M6												
M7												
M8												
M9												
M10												
M11												
M12												
M13												
M14												
M15												
M16												

difficulties with opening

recommended size range

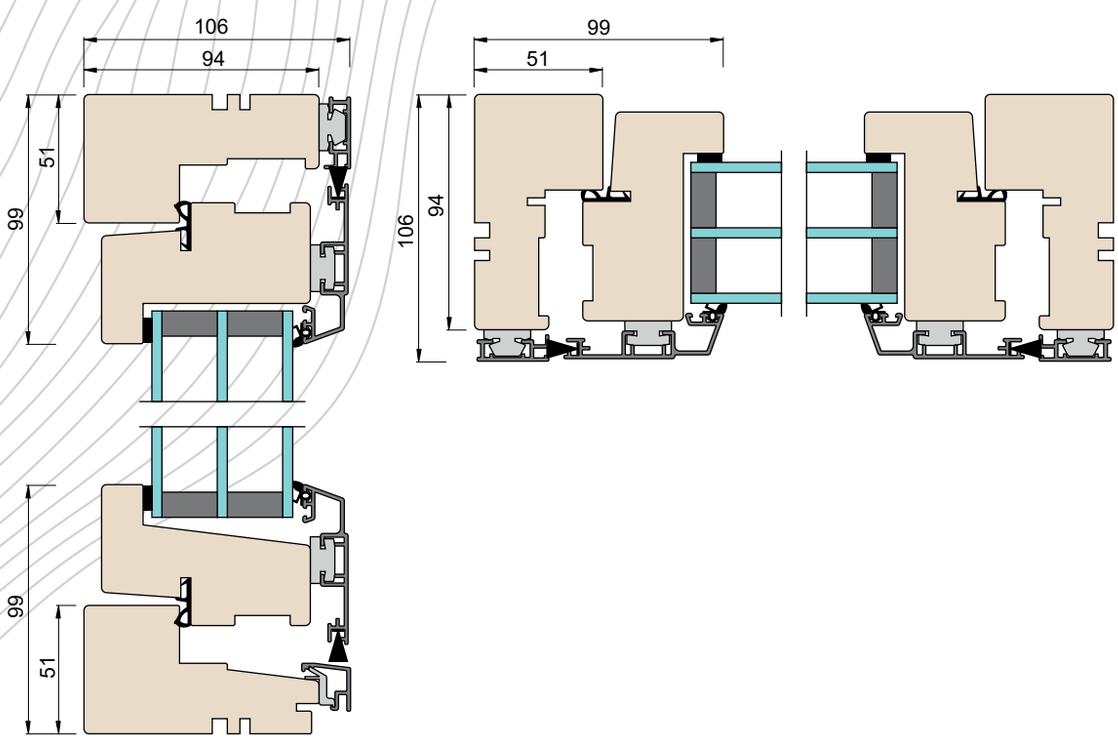

FE05

vau.ee

VILJANDI windows · doors

WOODEN-ALUMINIUM BALCONY DOOR TSADAL

Outward opening single frame wooden-aluminum balcony door.



Water tightness	Class 9A
Sound insulation	Rw32-40dB
Air permeability	Class 4
Resistance to wind load	Class C5
Thermal transmittance	0,97-0,82 W/m²K

TECHNICAL DATA



Size	680-980 x 1980-2080mm
Construction	single frame
Opening	side opening
Frame	pine, depth 106mm
Glass	triple-glazed, thickness 57mm
Fittings	Assa
Handle	Hoppe
Finishing	wood white (S 0502-Y), special colour, unfinished or stained. Aluminium tone RAL9010 or according to colour card
Extras	removable and/or glass dividing bars

FE06

It is possible to get special solutions. More information from the representative.

vau.ee

VILJANDI windows · doors

WOODEN-ALUMINIUM BALCONY DOOR TSADAL

TSADAL one sided

	M7	M8	M9	M10	M11
M19					
M20					
M21					
M22					

TSADAL double sided

	M12	M13	M14	M15	M16	M17	M18
M19							
M20							
M21							
M22							

min/max width x height

difficulties with opening

recommended size range

FE06

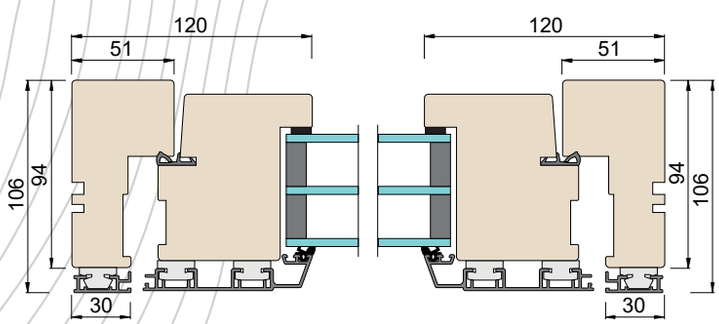

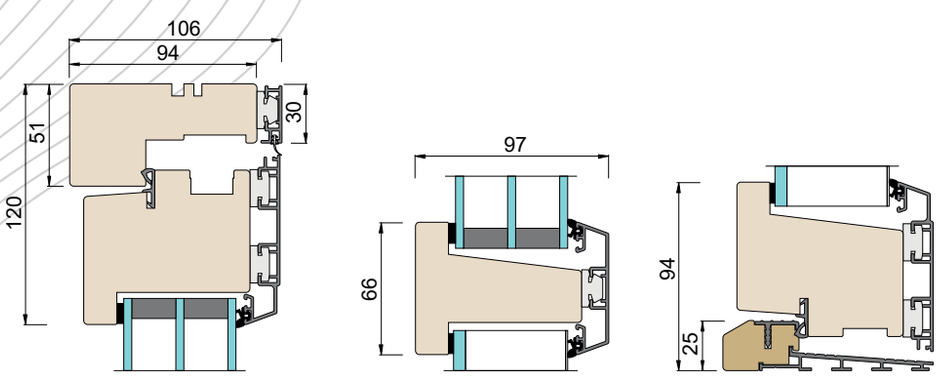

vau.ee

VILJANDI windows · doors

WOODEN-ALUMINIUM BALCONY DOOR POAL

Outward opening single frame wooden-aluminum balcony door.



Water tightness	Class 9A
Sound insulation	Rw32-36dB
Air permeability	Class 4
Resistance to wind load	Class C5
Thermal transmittance	1,1-1,0W/m²K

FE07

TECHNICAL DATA



Size	680-980 x 1880-2280mm
Construction	single frame
Opening	side opening
Frame	pine, depth 130,170,210mm
Glass	triple-glazed, thickness 42mm
Fittings	Assa
Handle	Abloy
Finishings	wood white (S 0502-Y), special colour, unfinished or stained. Aluminium tone RAL9010 or according to colour card
Extras	glued or between glass bars, blinds

It is possible to get special solutions. More information from the representative.

VILJANDI
windows · doors

WOODEN-ALUMINIUM BALCONY DOOR POAL

FE07

POAL

min/max width x height

	M7	M8	M9	M10	M11
M19					
M20					
M21					
M22					
M23					

difficulties with opening

recommended size range

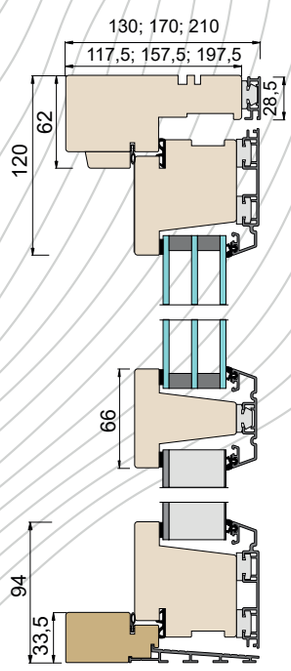

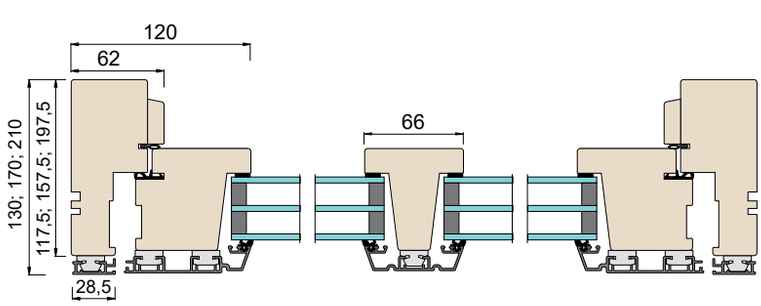

vau.ee

VILJANDI windows · doors

WOODEN-ALUMINIUM BALCONY DOOR POALv01

Outward opening wooden-aluminum balcony door.

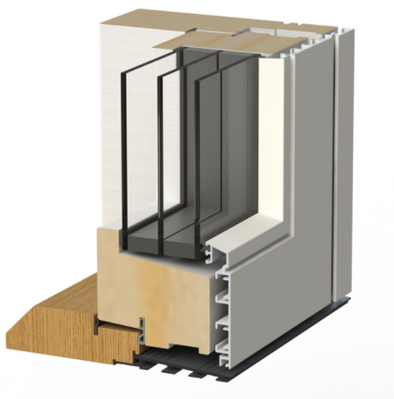

Water tightness	Class 9A
Sound insulation	Rw40-41dB
Air permeability	Class 4
Resistance to wind load	Class C4
Thermal transmittance	0,9-0,79W/m²K

FE08

TECHNICAL DATA



Size	680-980 x 1880-2280mm
Construction	single frame
Opening	side opening
Frame	pine, depth 130,170,210mm
Glass	triple-glazed, thickness 57mm
Fittings	Assa
Handle	Abloy
Finishings	wood white (S 0502-Y), special colour, unfinished or stained. Aluminium tone RAL9010 or according to colour card
Extras	glued or between glass bars, blinds

It is possible to get special solutions. More information from the representative.

VILJANDI
windows · doors

WOODEN-ALUMINIUM BALCONY DOOR POALv01

FE08

POALv01

min/max width x height

	M7	M8	M9	M10
M19				
M20				
M21				
M22				
M23				

recommended size range

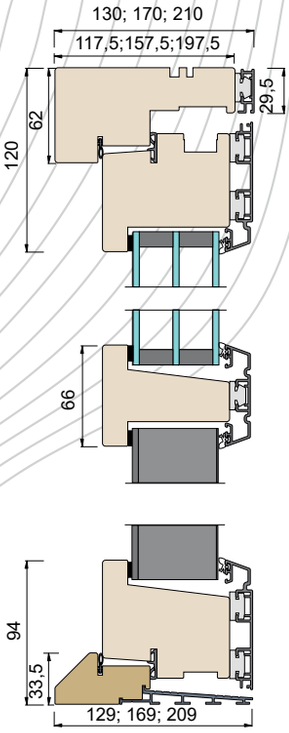

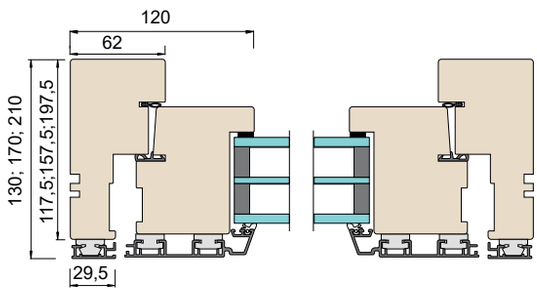

vau.ee

VKF **FF01**

FF

Outward opening double frame wooden windows and balcony doors

table of contents

VILJANDI windows · doors

VILJANDI windows · doors

WOODEN WINDOW VKF

Outward opening double frame wooden window.



Water tightness	Class 5A
Air permeability	Class 4
Resistance to wind load	Class C4

TECHNICAL DATA



FE01

Size	480-1080 x 480-1280mm
Construction	double frame
Opening	side opening
Frame	pine, depth 103mm
Glass	3-4mm glass in inner and outer sash
Fittings	window latch
Hinges	1228
Finishing	white (S 0502-Y) or unfinished
Extras	glass dividing glazing bars in outer sash

It is possible to get special solutions. More information from the representative.

VILJANDI windows · doors

WOODEN WINDOW VKF

VKF-1

	M5	M6	M7	M8	M9	M10	M11	M12
M4								
M5								
M6								
M7								
M8								
M9								
M10								
M11								
M12								
M13								

VKF-2

	M10	M11	M12	M13	M14
M5					
M6					
M7					
M8					
M9					
M10					
M11					
M12					
M13					
M14					

VKF-3

min/max width x height

	M15	M16	M17	M18
M5				
M6				
M7				
M8				
M9				
M10				
M11				
M12				
M13				
M14				

opening upwards

difficulties with opening

recommended size range

EF01

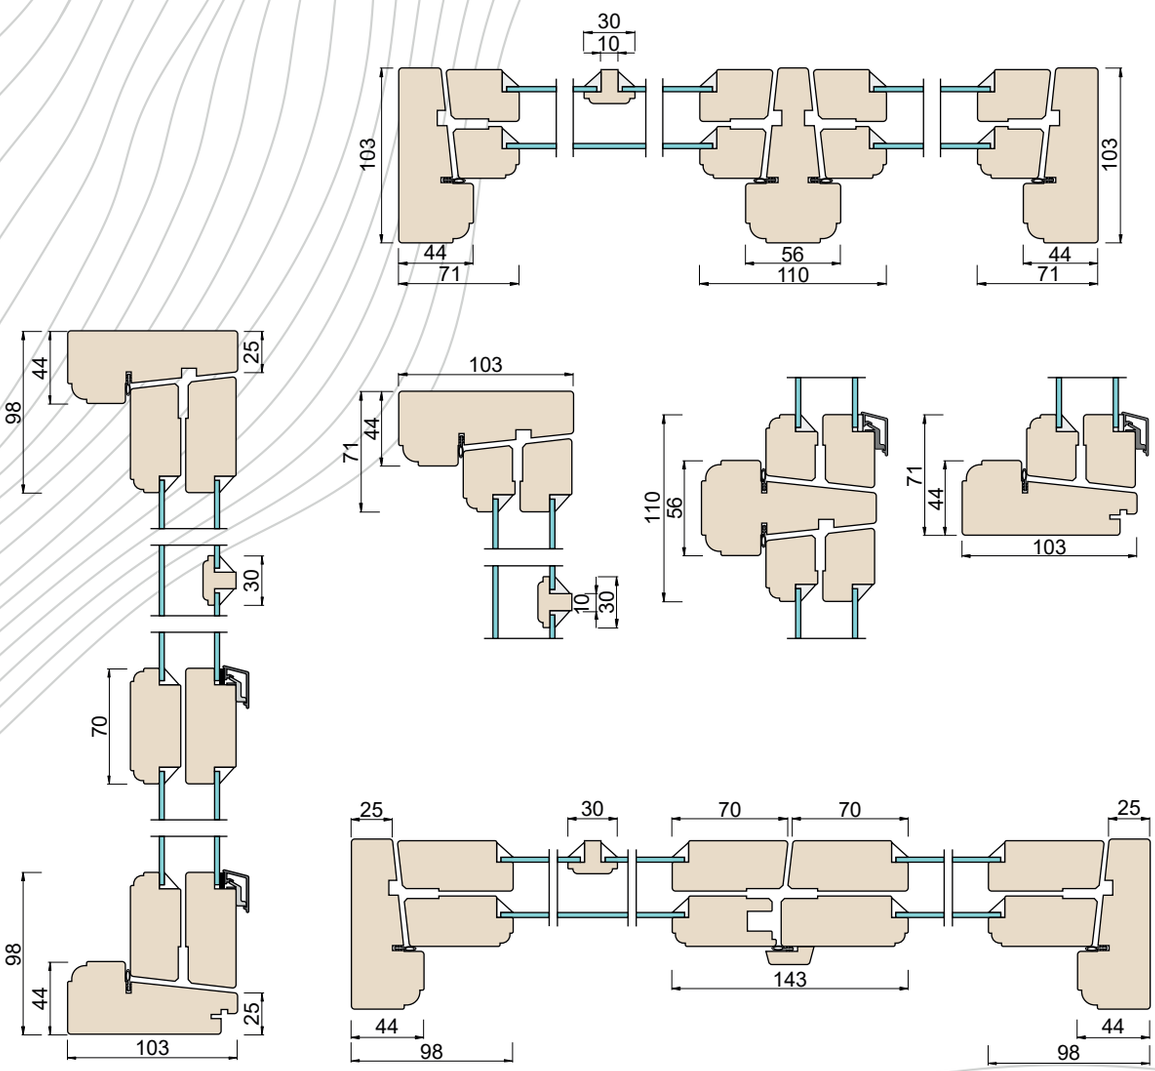

vau.ee

TKOD balcony door _____**FG01**

FG

Outward opening double frame wood-aluminium windows and balcony doors

table of contents

VILJANDI
windows · doors

VILJANDI windows · doors

WOODEN-ALUMINIUM BALCONY DOOR TKOD

Outward opening double frame wooden-aluminum balcony door.



Water tightness	Class 9A
Air permeability	Class 4
Resistance to wind load	Class C5
Thermal transmittance	1,1-1,0 W/m²K

TECHNICAL DATA



FG01

Size	680-980 x 1880-2180mm
Construction	double frame
Opening	side opening
Frame	pine, depth 106mm
Glass	glass in outer sash 4-6mm and inner sash double or triple glazing 24-42mm thick
Fittings	ASSA
Handle	Hoppe
Finishing	wood white (S 0502-Y), special colour, unfinished or stained. Aluminium tone RAL9010 or according to colour card
Extras	between glass and/or glued glazing bars ventilation valve, blinds between sashes

It is possible to get special solutions. More information from the representative.

VILJANDI windows · doors

WOODEN-ALUMINIUM BALCONY DOOR TKOD

TKOD one sided

min/max width x height

	M7	M8	M9	M10
M19				
M20				
M21				
M22				

difficulties with opening

recommended size range

FG01

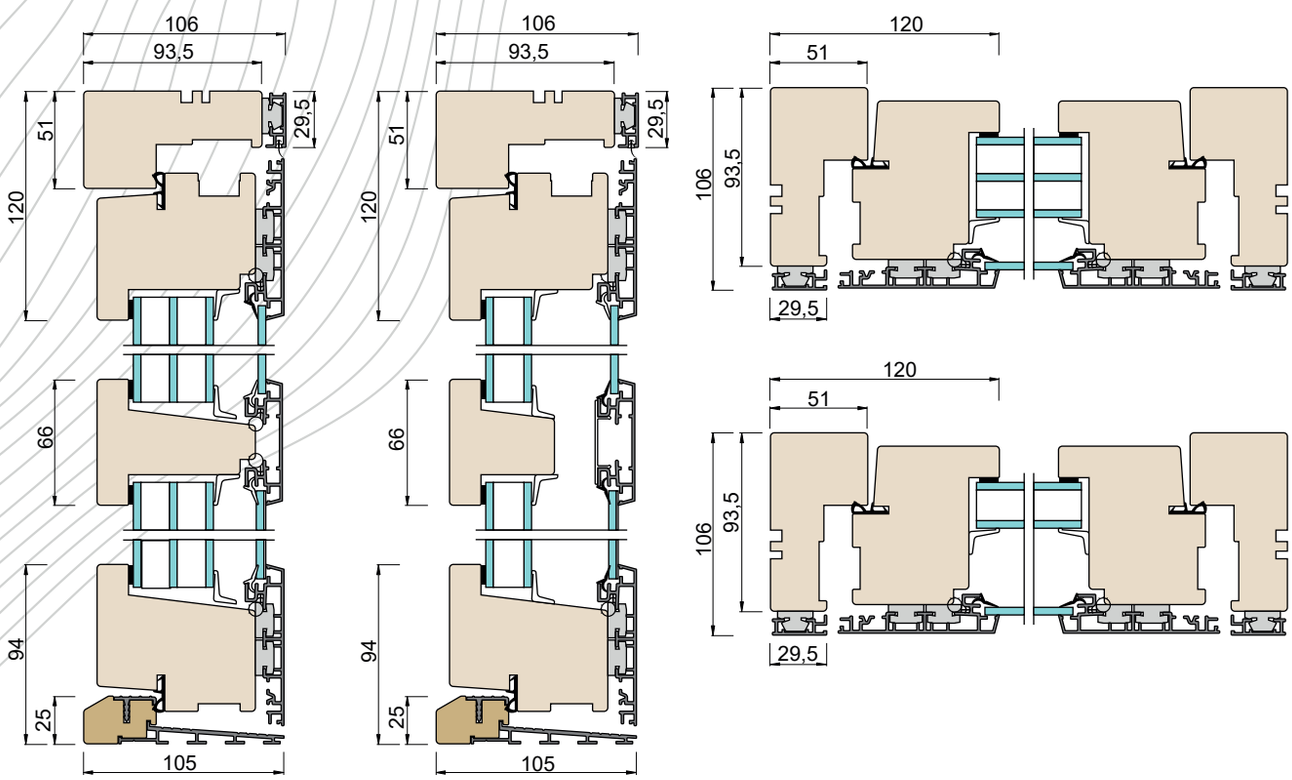

vau.ee

MSEAL-EI30/E45 **FH01**

VHSAL-EI30 **FH02**

VHFSAL-EI30 **FH03**

FH

Fire resistance windows

table of contents

VILJANDI windows · doors

VILJANDI windows · doors

WOODEN-ALUMINIUM WINDOW MSEAL-EI30/E45

Two-frame inward opening MSEAL-EI30 wooden-aluminum fire resistant window.

Fire protection glass is temperature sensitive and fire proof windows must not be used in rooms that are not heated in winter or where the internal temperature rises high (> 45 degrees Celsius).



Fire resistance	EI130/E45
Sound insulation	Rw51-56dB
Water tightness	Class 9A
Air permeability	Class 4
Resistance to wind load	Class C3
Thermal transmittance	1,2-0,84 W/m²K

EI 30



FH01

TECHNICAL DATA

Size	450-1160 x 450-1790mm
Construction	double frame
Opening	can be opened for washing
Frame	pine, depth 170, 210mm
Glass	glass in outer sahs up to 6mm, fire protection glazing in inner sash 33mm thick
Fittings	locking case
Hinges	bolt hinges
Finishing	wood white (S 0502-Y), special colour, unfinished or stained. Aluminium tone RAL9010 or according to colour card
Extras	glued glazing bars

It is possible to get special solutions. More information from the representative.

VILJANDI windows · doors

WOODEN-ALUMINIUM WINDOW MSEAL-EI30/E45

MSEAL-EI$_1$30/ E45

min/max width x height

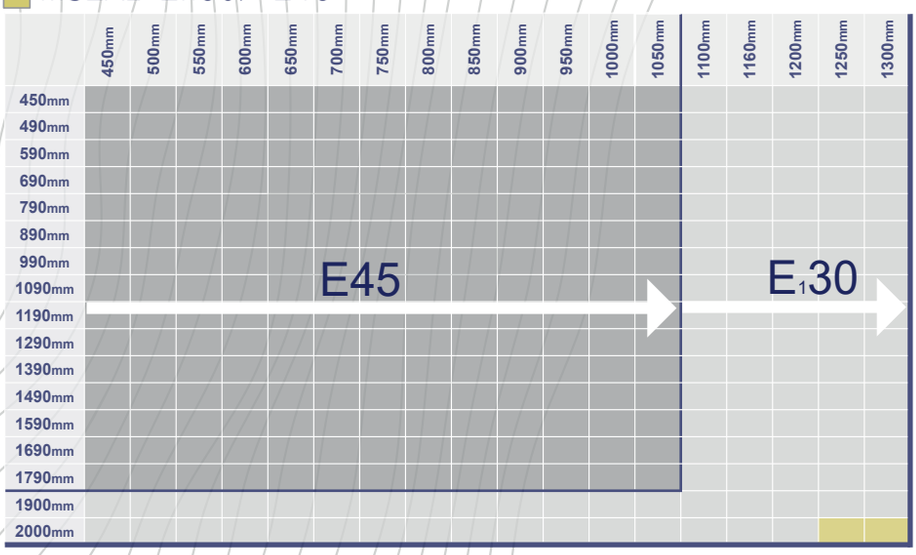

recommended size range EI$_1$30

recommended size range EI$_1$30/EI45

difficulties with opening

EH01

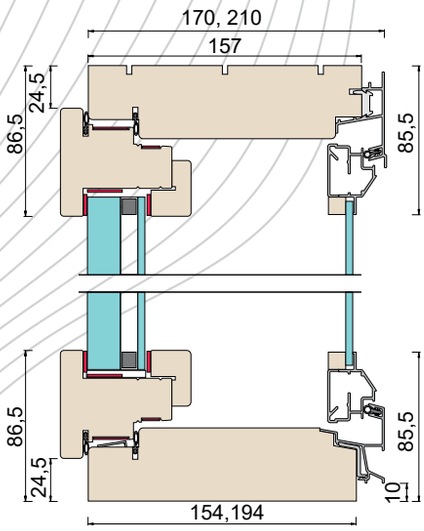

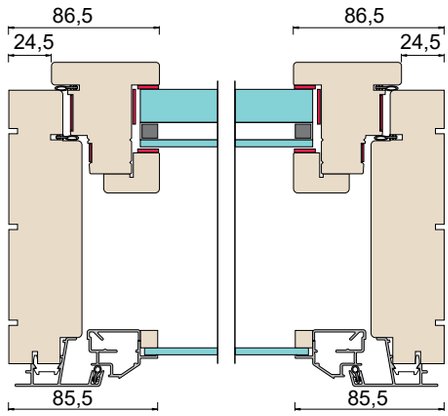

vau.ee

VILJANDI windows · doors

WOODEN-ALUMINIUM WINDOW VHSAL-EI30

VHSAL-EI30 is a single frame wood-aluminum fire resistant window that opens outwards.

Fire protection glass is temperature sensitive and fire proof windows must not be used in rooms that are not heated in winter or where the internal temperature rises high (> 45 degrees Celsius).

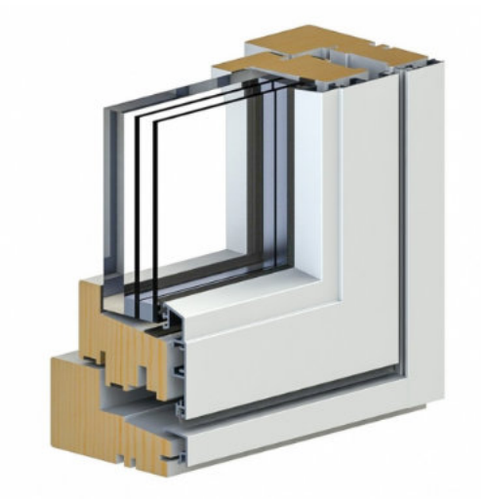

Fire resistance	$EI_1$30
Water tightness	Class 9A
Air permeability	Class 4
Resistance to wind load	Class C4

EI 30

FH02

TECHNICAL DATA



Size	480-1180 x 580-1580mm
Construction	single frame
Opening	top hung
Frame	pine, depth 106mm
Glass	triple fire protection glazing, thickness 42mm
Fittings	ASSA Allswing
Handle	Hoppe
Finishing	wood white (S 0502-Y), special colour, unfinished or stained. Aluminium tone RAL9010 or according to colour card
Extras	glued and/or removable glazing bars, blinds

It is possible to get special solutions. More information from the representative.

VILJANDI
windows · doors

WOODEN-ALUMINIUM WINDOW VHSAL-EI30

VHSAL-EI30

min/max width x height

	M5	M6	M7	M8	M9	M10	M11	M12
M5								
M6								
M7								
M8								
M9								
M10								
M11								
M12								
M13								
M14								
M15								
M16								

difficulties with opening

recommended size range

EH02

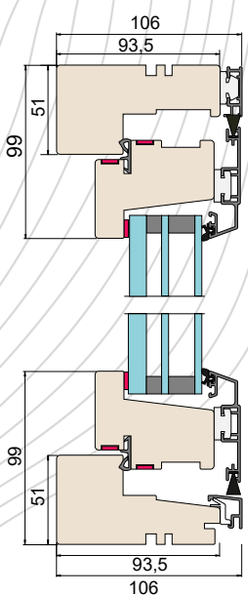

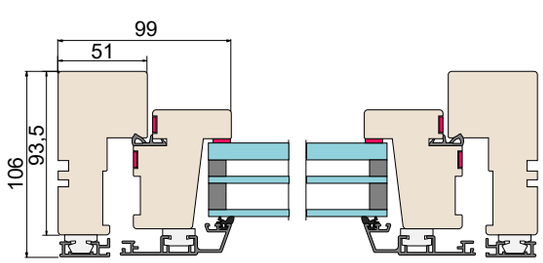

vau.ee

VILJANDI windows · doors

WOODEN-ALUMINIUM WINDOW VHFSAL-EI30

Fixed VHFSAL-EI30 wooden-aluminum fire resistant window. The window is compatible with fire protection window VHSAL-EI30.

Fire protection glass is temperature sensitive and fire resistance windows must not be used in rooms that are not heated in winter or where the internal temperature rises high (> 45 degrees Celsius).



Fire resistance	EI30
Water tightness	Class 9A
Air permeability	Class 4
Resistance to wind load	Class C4

EI 30



FH03

TECHNICAL DATA

Size	480-1480 x 480-1580mm
Opening	fixed
Frame	pine, depth 106mm
Glass	triple fire protection glass, 42mm thick
Finishing	wood white (S 0502-Y), special colour, unfinished or stained. Aluminium tone RAL9010 or according to colour card
Extras	glued and/or removable glazing bars, blinds, ventilation valve

It is possible to get special solutions. More information from the representative.

VILJANDI windows · doors

WOODEN-ALUMINIUM WINDOW VHFSAL-EI30

VHFSAL-EI30

min/max width x height

	M5	M6	M7	M8	M9	M10	M11	M12	M13	M14	M15
M5											
M6											
M7											
M8											
M9											
M10											
M11											
M12											
M13											
M14											
M15											
M16											

can be continued into the opening

there is no compliant certificate

recommended size range EI30/EI45

FH03

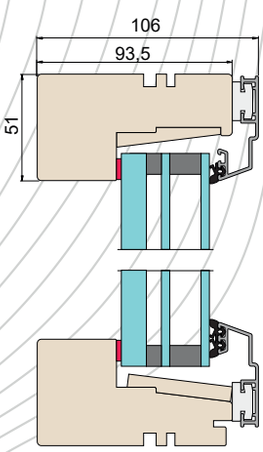

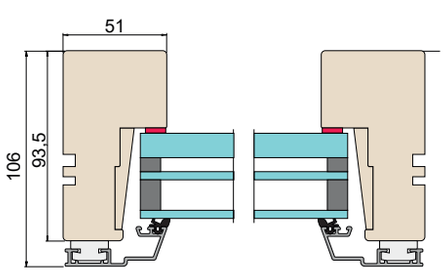

vau.ee

VHSAL RC2 **FI01**

FI

Windows with security class

table of contents

VILJANDI windows · doors

VILJANDI windows · doors

WOODEN-ALUMINIUM WINDOW VHSAL RC2

Outward opening a certified security classification single frame wooden-aluminum window.

Water tightness	Class 9A
Air permeability	Class 4
Resistance to wind load	Class C4



RC2

FI01

TECHNICAL DATA



Size	580-1680 x 580-1580mm
Construction	single frame
Opening	projecting top hung
Frame	pine, depth 106mm
Glass	triple glass, thickness 42mm
Fittings	ASSA Allswing
Handle	Hoppe
Finishing	wood white (S 0502-Y), special colour, unfinished or stained. Aluminium tone RAL9010 or according to colour card.
Extras	between glass, removable and/or glued bars, blinds, ventilation valve

It is possible to get special solutions. More information from the representative.

VILJANDI
windows · doors

WOODEN-ALUMINIUM WINDOW VHSAL RC2

VHSAL RC2

min/max width x height

	M6	M7	M8	M9	M10	M11	M12	M13	M14	M15	M16	M17
M6												
M7												
M8												
M9												
M10												
M11												
M12												
M13												
M14												
M15												
M16												

difficulties with opening

recommended size range

EI01









vau.ee

HSAL _____ **FJ03**

HSWD _____ **FJ04**

FJ

Sliding doors

table of contents

VILJANDI
windows · doors

VILJANDI windows · doors

WOODEN-ALUMINUM SLIDING DOOR HSAL

Inward opening wooden-aluminum lift and slide door with triple-glazed.

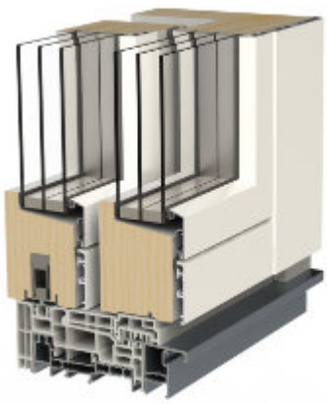

Water tightness	Class 7A
Sound insulation	Rw 31-41 dB(klaasil)
Air permeability	Class 4
Resistance to wind load	Class C3
Thermal transmittance	0,97-0,85 W/m²K

* The given values refers for 2-opening product size 2580x2080mm

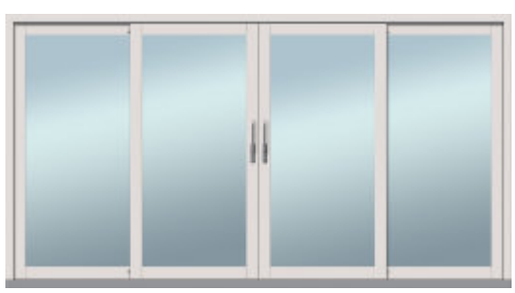

TECHNICAL DATA



Size	2-opening 1580-3980 x 1780-2580
	4-opening 2880-5980 x 1780-2580
Construction	sliding door
Opening	parallel
Frame	pine, depth 198mm
Glass	triple-glazed, thickness 52mm
Fittings	G.U
Finishing	wood, white (S 0502-Y), special colour or unfinished. Aluminum shade based on RAL9010 or color card
Extras	glazing bars

FJ03

It is possible to get special solutions. More information from the representative.

vau.ee

VILJANDI
windows · doors

WOODEN-ALUMINUM SLIDING DOOR HSAL

HSAL double opening

	M16	M17	M18	M19	max kuni M40
M18					
M19					
M20					
M21					
M22					
M23					
M24					
M25					
M26					

HSAL four opening

	M29	M30	M40	M50	max kuni M60
M18					
M19					
M20					
M21					
M22					
M23					
M24					
M25					
M26					

min/max width x height

recommended size range

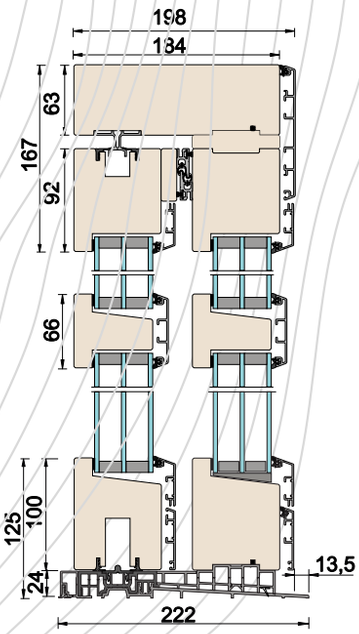

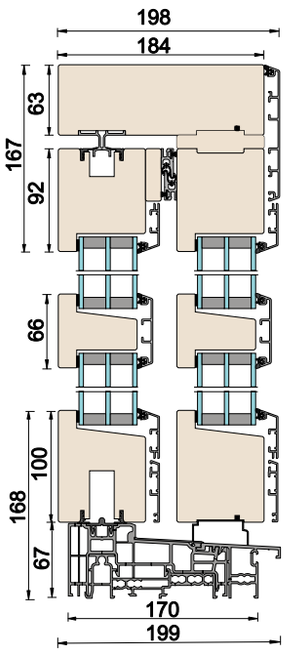

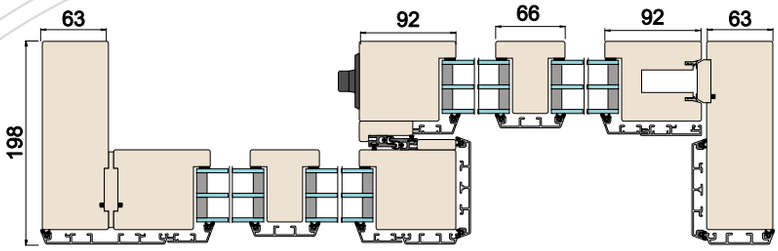

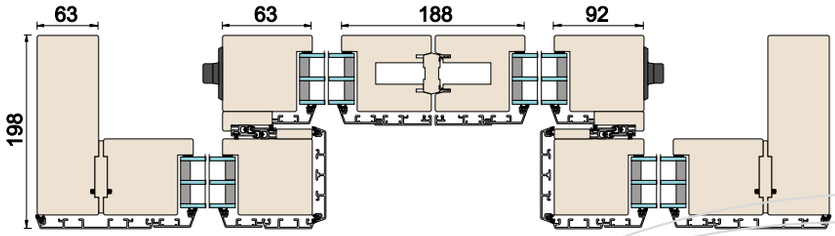

vau.ee

VILJANDI windows · doors

WOODEN SLIDING DOOR HSWD

HSWD is inward opening wooden lift and slide door with triple-glazed.

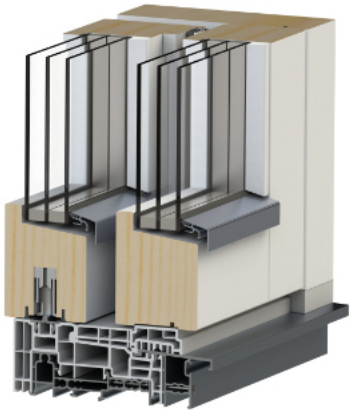

Water tightness	Class 5A
Air permeability	Class 4
Sound insulation	Rw32dB(glass)
Resistance to wind load	Class C4
Thermal transmittance	1,1-1,0 W/m²K

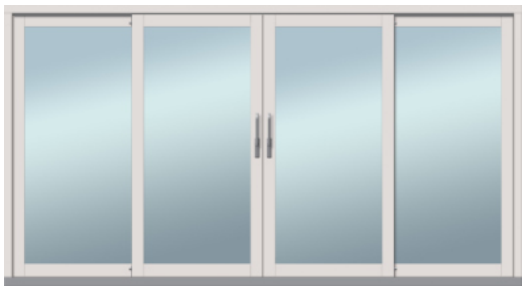

TECHNICAL DATA



Size	2-opening 1580-3980 x 1780-2580
	4-opening 2880-5980 x 1780-2580
Construction	sliding door
Opening	parallel
Frame	pine, depth 184mm
Glass	triple-glazed, thickness 42mm
Fittings	G.U
Finishing	wood, white (S 0502-Y), special colour or unfinished.
Extras	glazing bars

FJ04

It is possible to get special solutions. More information from the representative.

VILJANDI windows · doors

WOODEN SLIDING DOOR HSWD

HSWD double opening

	M16	M17	M18	M19	max M40
M18					
M19					
M20					
M21					
M22					
M23					
M24					
M25					
M26					

HSWD four opening

	M29	M30	M40	M50	max M60
M18					
M19					
M20					
M21					
M22					
M23					
M24					
M25					
M26					

min/max width x height

recommended size range

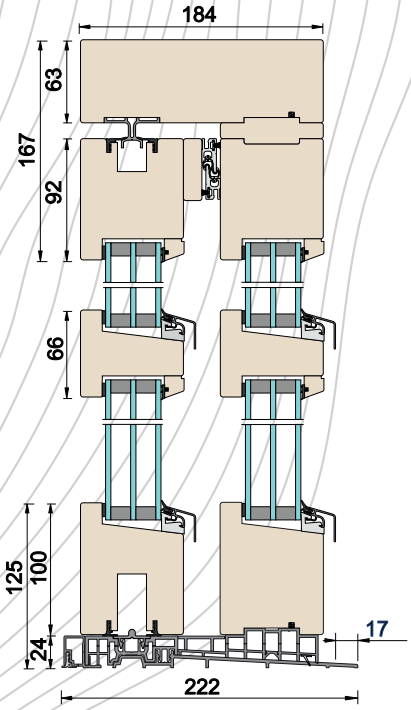

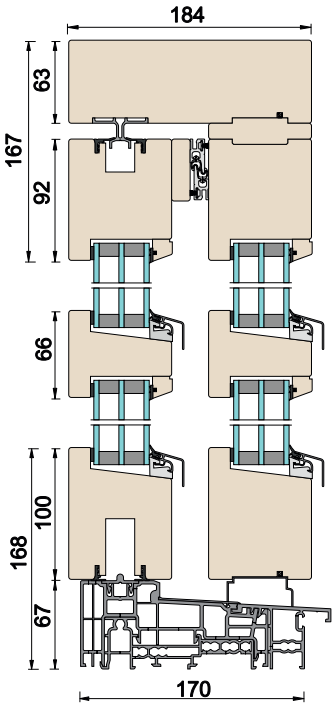

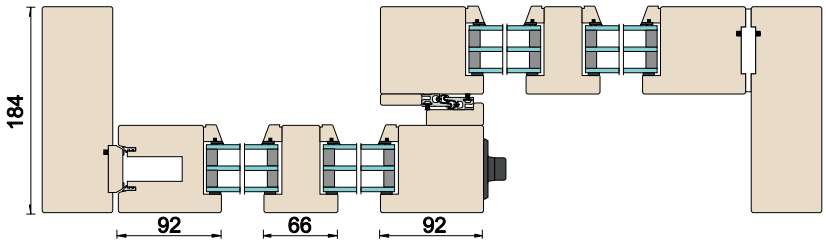

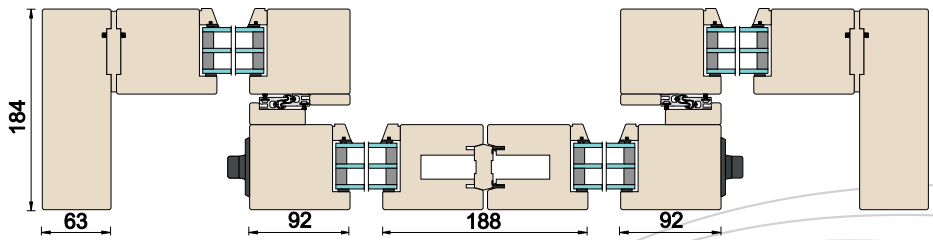

FJ04

vau.ee

G7 FK01
G7AL FK02

FK

Folding doors

table of contents

VILJANDI windows · doors

VILJANDI
windows · doors

FOLDING DOOR G7

Outward opening wooden folding door.

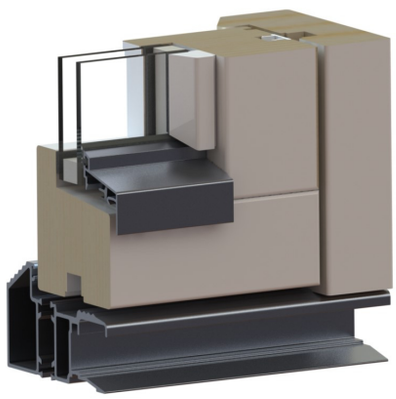

FK01

TECHNICAL DATA

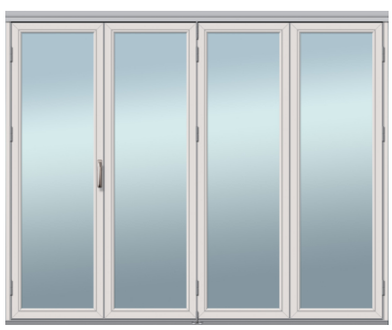

Size	1280-4080 x 1990-2190mm
Construction	single frame
Opening	left or right; 2-5 leaves
Frame	pine, depth 91,5mm
Glass	double glass, thickness 23mm
Fittings	Hoppe
Finishing	white (S 0502-Y) or special colour

It is possible to get special solutions. More information from the representative.

vau.ee

VILJANDI
windows · doors

FOLDING DOOR G7

G7

min/max width x height

2-sheet	1280	1380	1480	1580	1680
3-sheet	1880	2030	2180	2330	2480
4-sheet	2480	2680	2880	3080	3280
5-sheet	3080	3330	3580	3830	4080

recommended size range

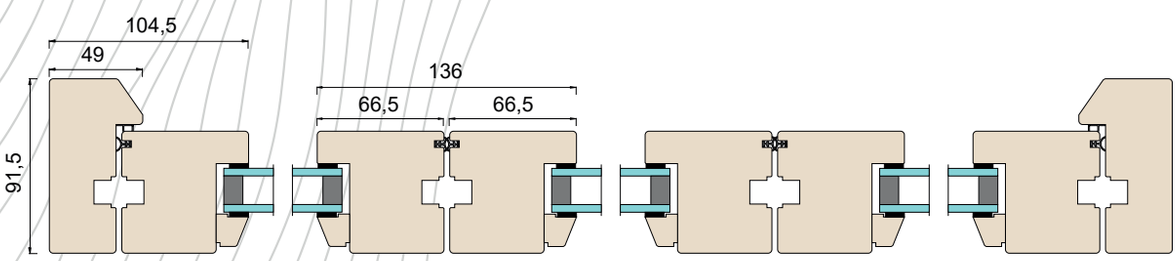

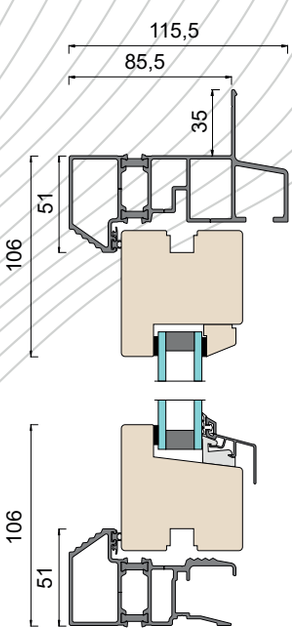

FK01

vau.ee

VILJANDI windows · doors

FOLDING DOOR G7AL

Outward opening wooden-aluminium folding door.

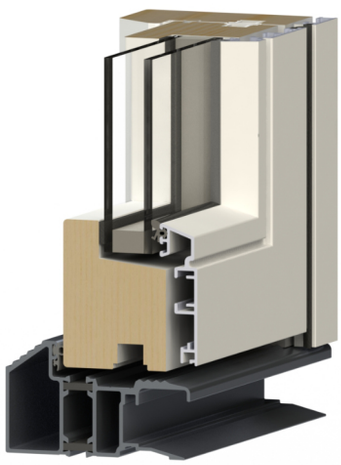

Water tightness	Class 2A
Air permeability	Class 1
Resistance to wind load	Class C1

FK02

TECHNICAL DATA

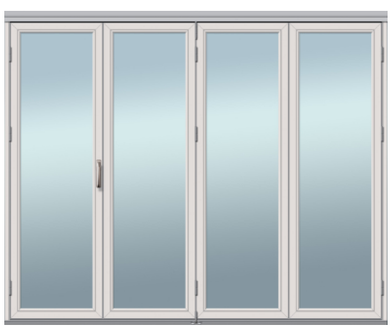

Size	1280-4080 x 1990-2190mm
Construction	single frame
Opening	left or right; 2-5 leaves
Frame	pine, depth 91,5mm
Glass	double glass, thickness 23mm
Fittings	Hoppe
Finishing	wood white (S 0502-Y) or special color. Aluminum tone RAL9010 or according to colour card

It is possible to get special solutions. More information from the representative.

VILJANDI windows · doors

FOLDING DOOR G7AL

G7AL

min/max width x height

2-sheet	1280	1380	1480	1580	1680
3-sheet	1880	2030	2180	2330	2480
4-sheet	2480	2680	2880	3080	3280
5-sheet	3080	3330	3580	3830	4080

recommended size range

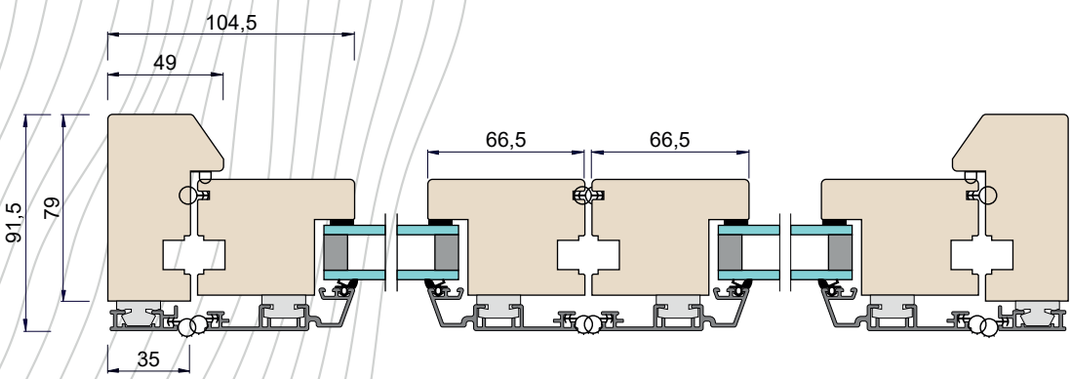

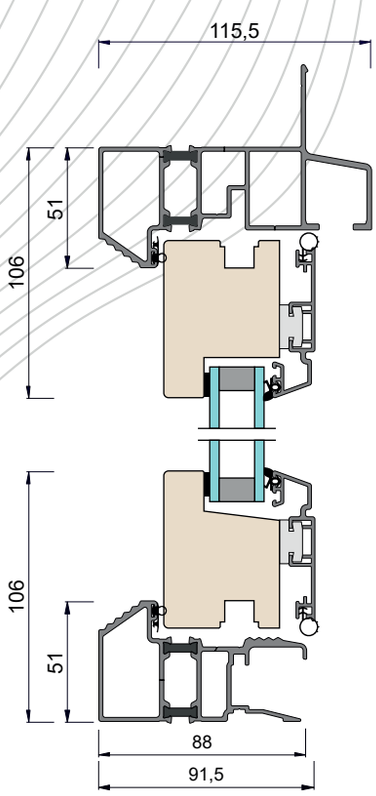

FK02

vau.ee



G

SPECIAL PRODUCTS

table of contents

VILJANDI
windows • doors

Cold-Cab **GA01**

Interior door with hidden frame **GA02**

Construction door BD42 **GA03**

GA

Special products

table of contents

VILJANDI
windows · doors

VILJANDI windows · doors

COLD-CAB

Cold-Cab is a door system that includes an external door, refrigerator (24l), freezer (18l) and rack shelf (89-180l).



TECHNICAL DATA

Size	external door M9-10 x 19-23
	rack shelf M5 x 19-23, depth 700mm
	refridgerator 210 x 380, depth 310mm, temp. 0°C to +15°C
	freezer 180x365, depth 280mm, temp. -10°C to -18°C
Threshold	height 25mm
Locking system	smart solution
Hinges	hidden hinges
Finishing	laminate with stone veneer

GA01

It is possible to get special solutions. More information from the representative.

VILJANDI
windows · doors

COLD-CAB

1 External door smart lock

1A

2 Cold-Cab lock

3 Three point lock on inside door + handle

4 Smart door-eye /doorbell

4A

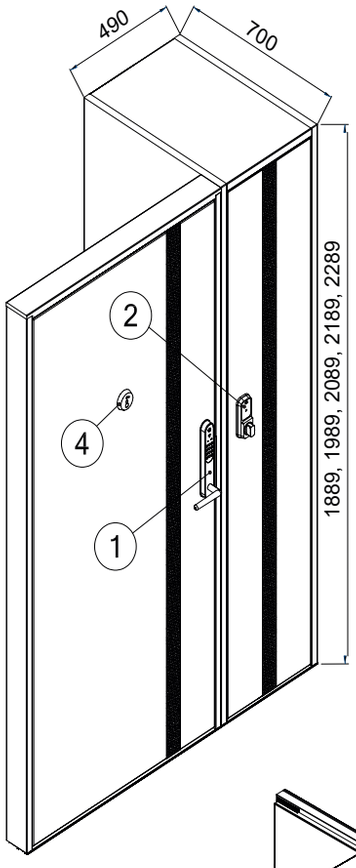

* view from outside

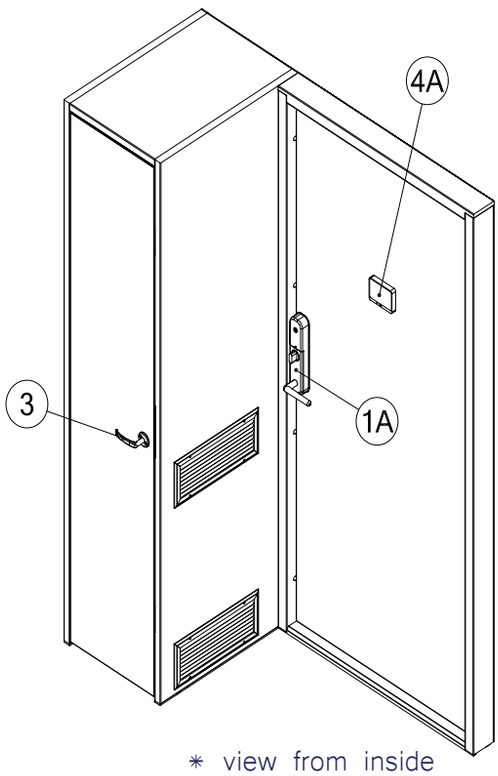

* view from inside

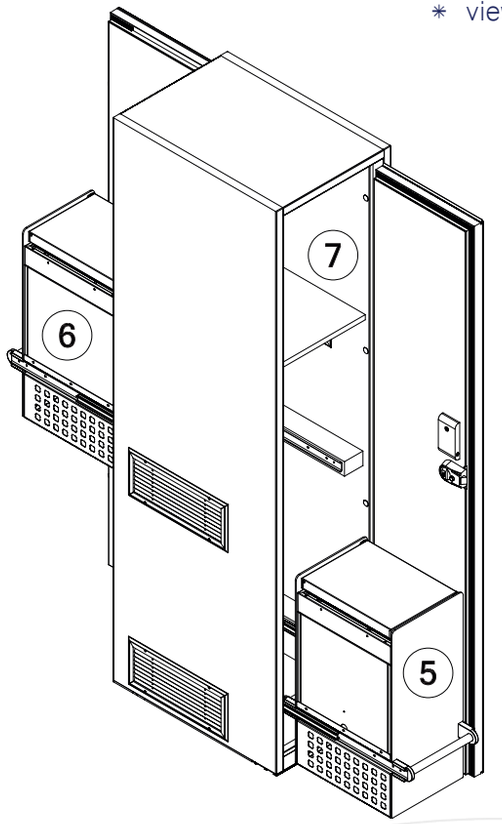

5 Freezer

6 Refridgerator

7 Cold-Cab rack shelf

M19 - 390 mm (89L)
M20 - 490 mm (111L)
M21 - 590 mm (134L)
M22 - 690 mm (157L)
M23 - 790 mm (180L)

GA01

20211029

VILJANDI windows · doors

INTERIOR DOOR WITH HIDDEN FRAME

Hidden in-wall frame system with door leaf.

The door is for use in heated work and living rooms. The door is not suitable for outdoor use and between rooms with different air temperatures.



inward opening outward opening

TECHNICAL DATA

Size	customer dimensions
Door leaf	thickness of 40, 45, 55mm (outward opening) or 50-55mm (inward opening)
Frame	X2 aluminium profile
Locking system	magnet lock
Hinges	A24
Finishing	painted, veneered, laminated
Glass opening	according to the flush doors glass opening designs
Glass	clear, cotzwold, raaka, satinovo
Extras	hidden door closer, door closer Geze Active Stop

GA02

It is possible to get special solutions. More information from the representative.

VILJANDI
windows · doors

INTERIOR DOOR WITH HIDDEN FRAME

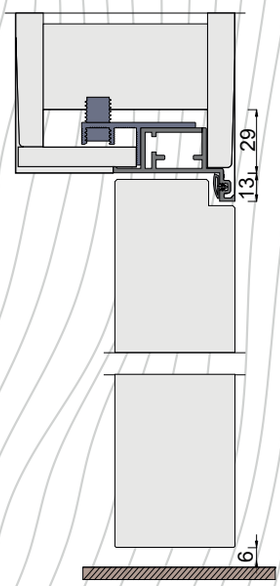

inward opening

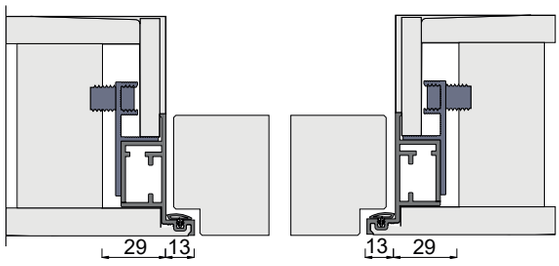

GA02

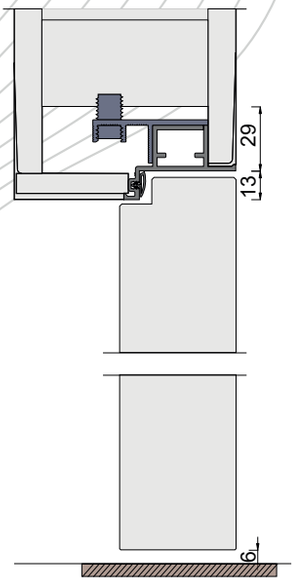

outward opening

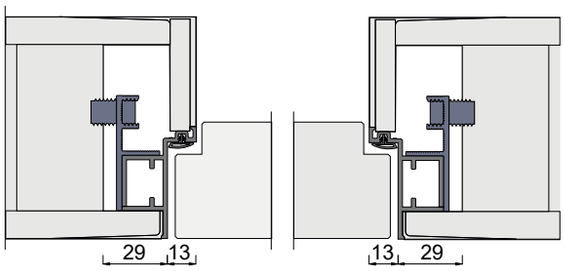

vau.ee

VILJANDI windows · doors

CONSTRUCTION DOOR BD42

Unfinished door for temporary use for a building.

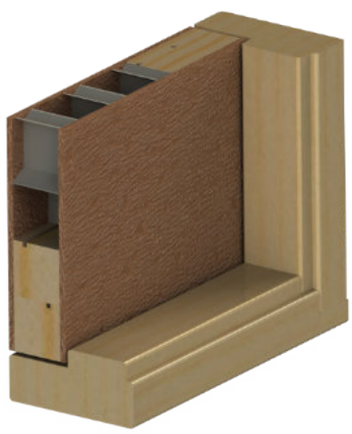

TECHNICAL DATA

Size	M9-10 x M20-21
Door leaf	non-rebated, thickness 42mm
Frame	pine, depth 92mm
Locking system	lock case 565, striking plate 2860-3
Hinges	platehinges 5248
Finishing	unfnished moistureproof HDF

GA03

It is possible to get special solutions. More information from the representative.

VILJANDI
windows · doors

CONSTRUCTION DOOR BD42

	H	B	W	A	A1	A2
M9			890	825	806	761
M10			990	925	906	861
M20	1989	1940				
M21	2089	2040				



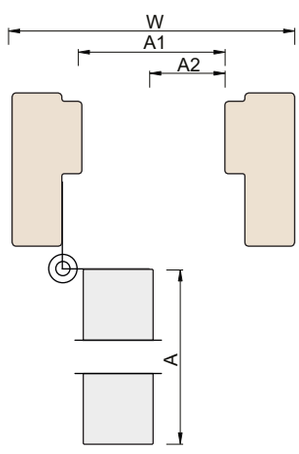

GA03

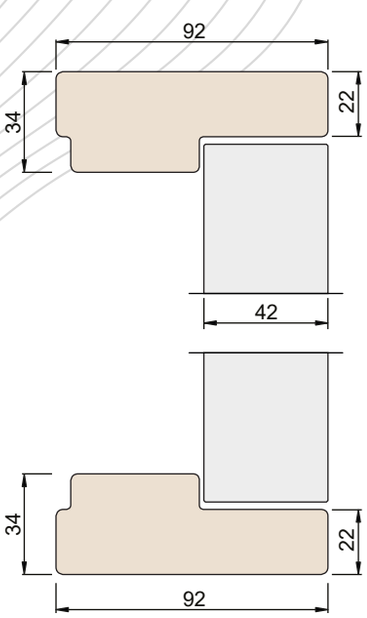

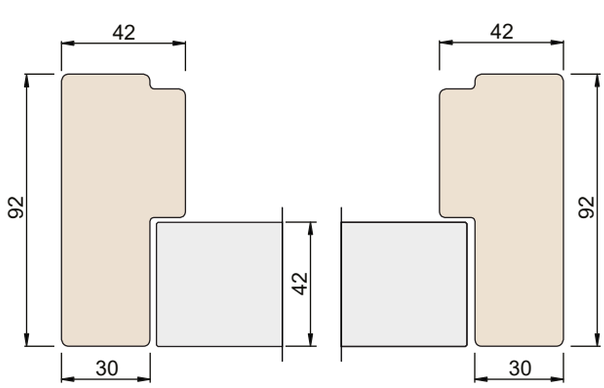



AS VILJANDI AKEN JA UKS

VILJANDI
windows · doors

vau.ee